



BANTAM 2

Table of contents


Line plan for **BANTAM 2**

Line lengths for **BANTAM 2 - 12**

Full Line lengths for **BANTAM 2 - 12**

Line lengths for **BANTAM 2 - 14**

Full Line lengths for **BANTAM 2 - 14**

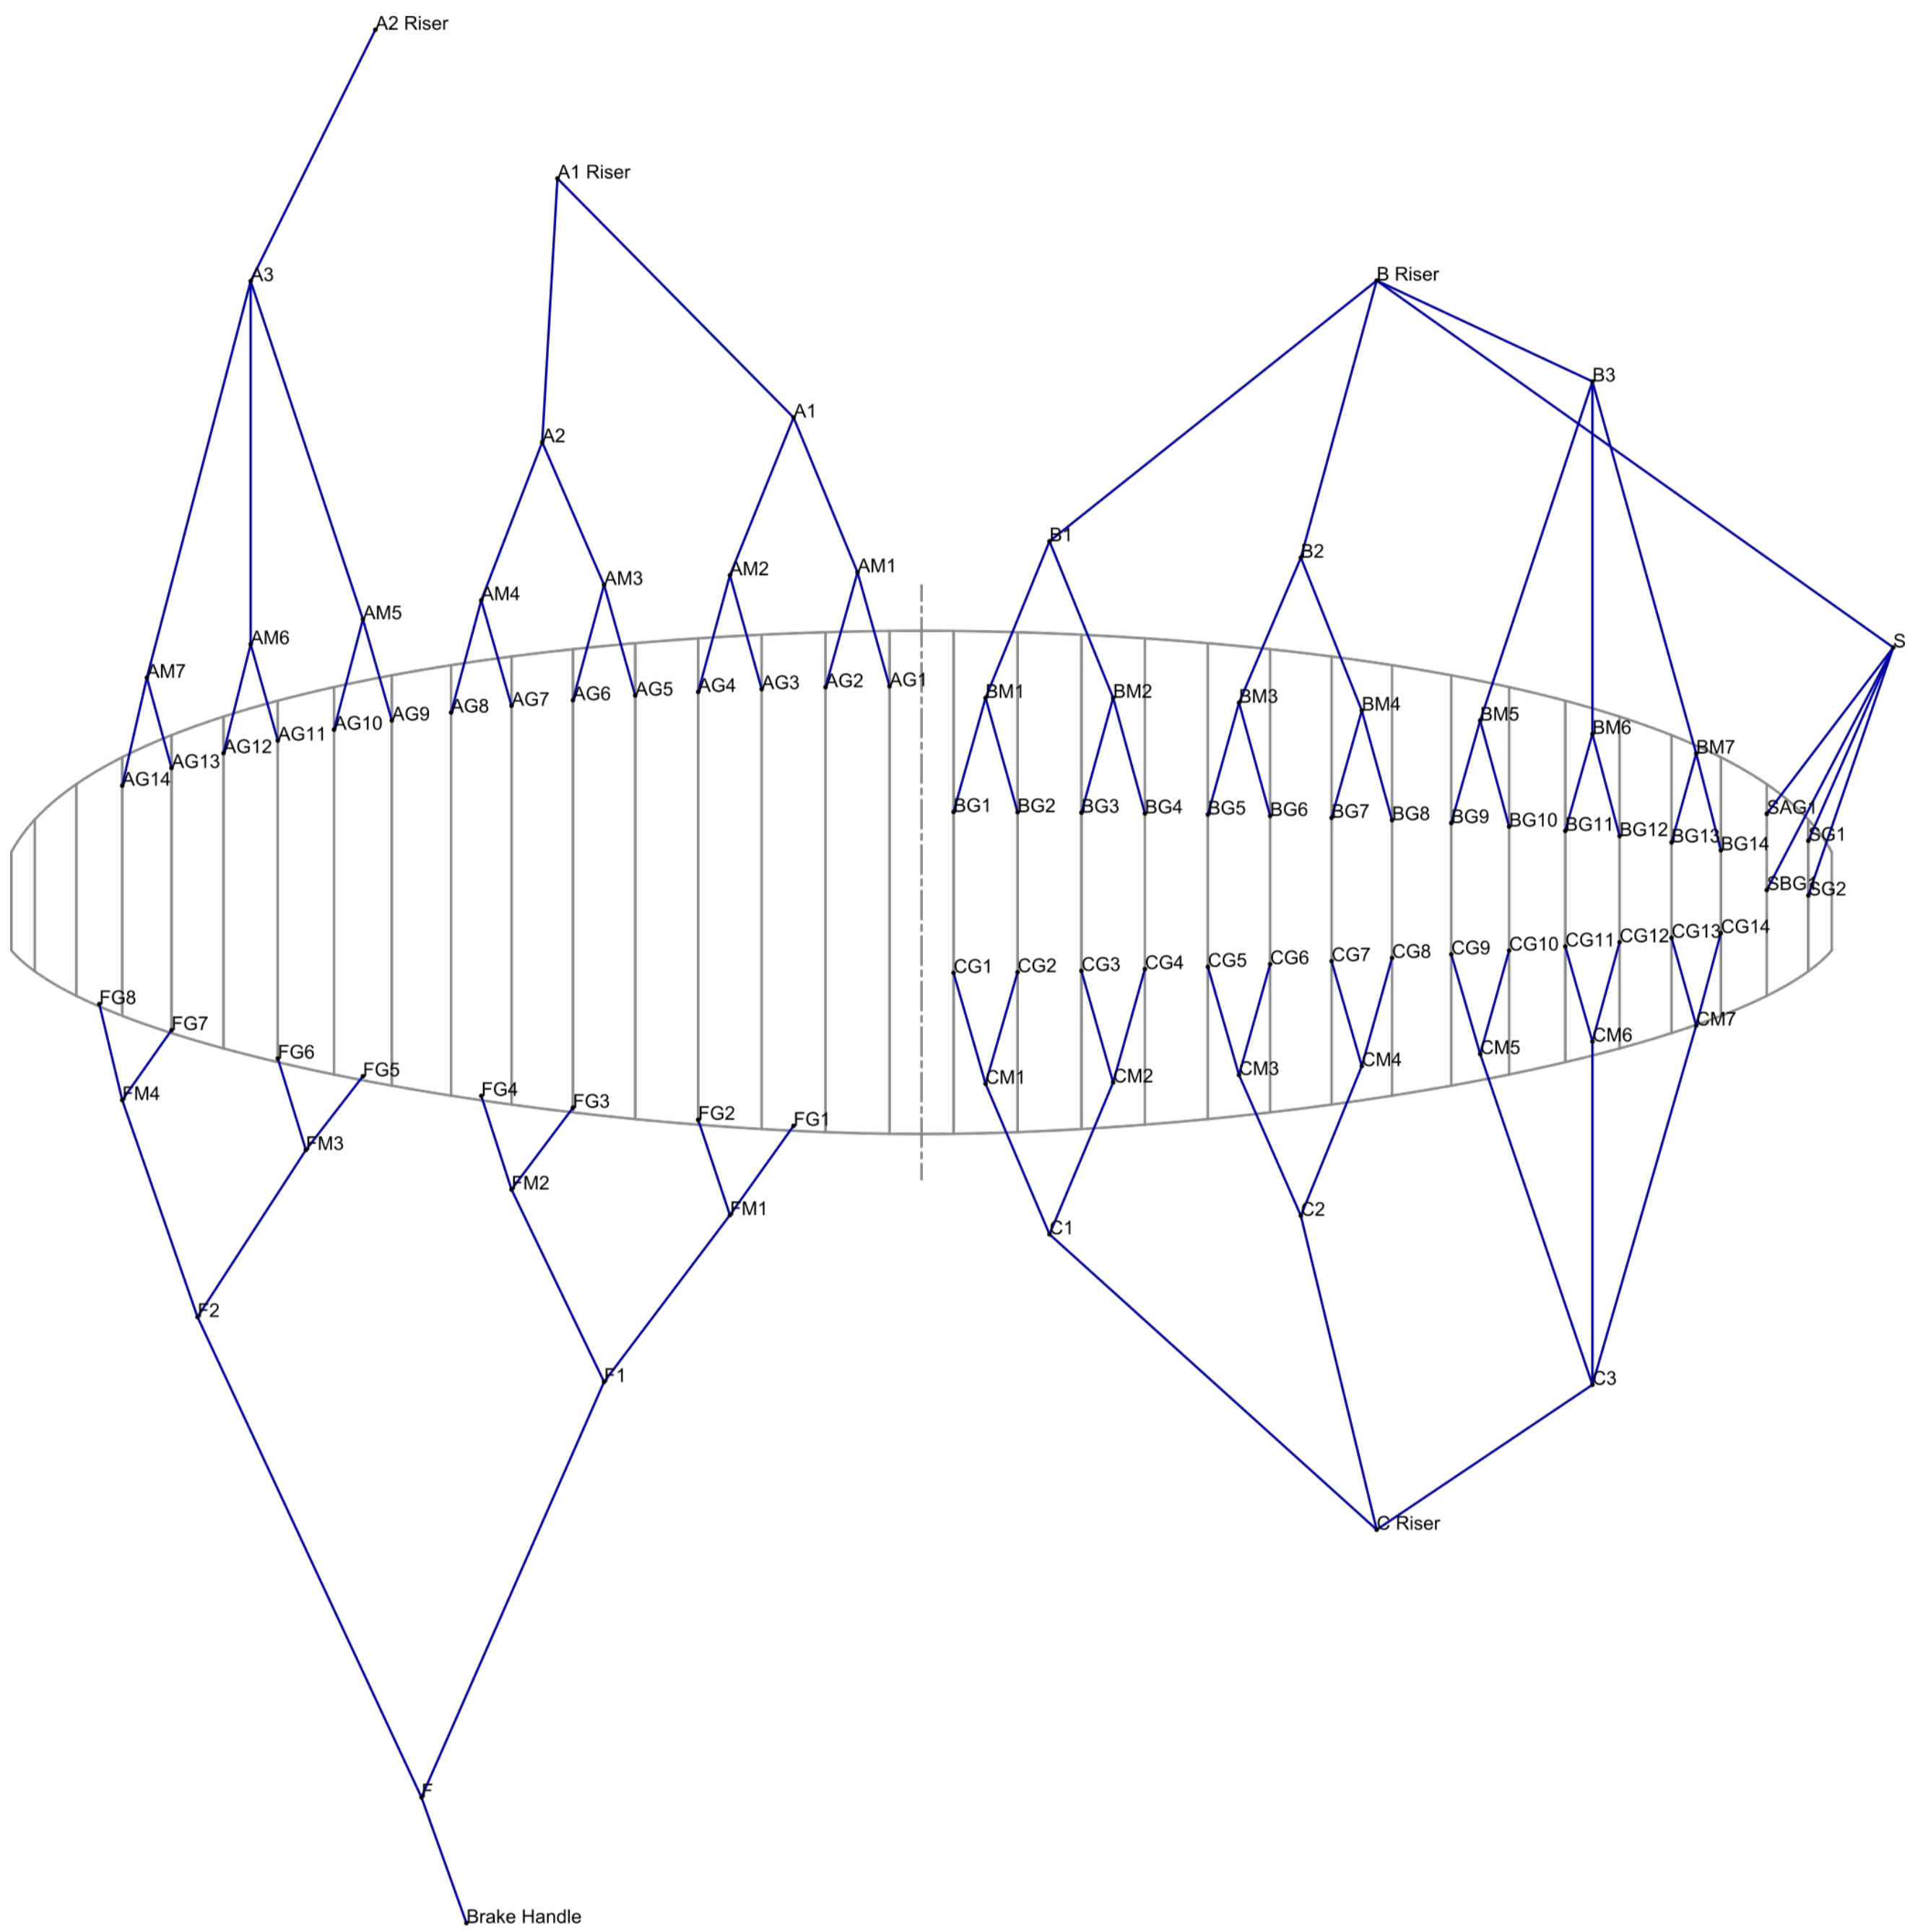

Line lengths for BANTAM2 - 12

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	289
A2	PPSL191-RD	291.8
A3	PPSL191-RD	209.4
AM1	ED8kU-90DD-RD	63.7
AM2	ED8kU-90DD-RD	61.5
AM3	ED8kU-90DD-RD	59
AM4	ED8kU-90DD-RD	61
AM5	ED8kU-90DD-RD	144.3
AM6	ED8kU-90DD-RD	139
AM7	ED8kU-90DD-RD	137.4
AG1	ED8kU-50DD-RD	48.7
AG10	ED8kU-50DD-RD	39.2
AG11	ED8kU-50DD-RD	40.7
AG12	ED8kU-50DD-RD	38.4
AG13	ED8kU-50DD-RD	37.8
AG14	ED8kU-50DD-RD	37.1
AG2	ED8kU-50DD-RD	41.9
AG3	ED8kU-50DD-RD	43
AG4	ED8kU-50DD-RD	47.7
AG5	ED8kU-50DD-RD	46.8
AG6	ED8kU-50DD-RD	42
AG7	ED8kU-50DD-RD	40.3
AG8	ED8kU-50DD-RD	45.4
AG9	ED8kU-50DD-RD	43.5
B1	PPSL191-YW	287.5
B2	PPSL191-YW	290.3
B3	PPSL191-YW	211.9
BM1	ED8kU-70DD-RD	64
BM2	ED8kU-70DD-RD	61.2
BM3	ED8kU-70DD-RD	58.4
BM4	ED8kU-70DD-RD	59.9
BM5	ED8kU-70DD-RD	138.5
BM6	ED8kU-70DD-RD	134.2
BM7	ED8kU-70DD-RD	134.1
BG1	ED8kU-50DD-RD	48.5
BG10	ED8kU-50DD-RD	38.4
BG11	ED8kU-50DD-RD	39.2
BG12	ED8kU-50DD-RD	37.2
BG13	ED8kU-50DD-RD	35.4

BG14	ED8kU-50DD-RD	34.7
BG2	ED8kU-50DD-RD	41.5
BG3	ED8kU-50DD-RD	42.9
BG4	ED8kU-50DD-RD	47.3
BG5	ED8kU-50DD-RD	46.4
BG6	ED8kU-50DD-RD	41.4
BG7	ED8kU-50DD-RD	39.9
BG8	ED8kU-50DD-RD	44.7
BG9	ED8kU-50DD-RD	42.6
C1	TSL140-BE	300.6
C2	TSL140-BE	301.7
C3	TSL140-BE	221
CM1	ED8kU-70DD-RD	63.3
CM2	ED8kU-70DD-RD	60.3
CM3	ED8kU-70DD-RD	58.8
CM4	ED8kU-70DD-RD	59.1
CM5	ED8kU-70DD-RD	138.3
CM6	ED8kU-70DD-RD	132.2
CM7	ED8kU-70DD-RD	130.6
CG1	ED8kU-50DD-RD	48.4
CG10	ED8kU-50DD-RD	37.6
CG11	ED8kU-50DD-RD	39.3
CG12	ED8kU-50DD-RD	36.3
CG13	ED8kU-50DD-RD	35
CG14	ED8kU-50DD-RD	33.6
CG2	ED8kU-50DD-RD	41.4
CG3	ED8kU-50DD-RD	42.9
CG4	ED8kU-50DD-RD	47.3
CG5	ED8kU-50DD-RD	46.5
CG6	ED8kU-50DD-RD	41
CG7	ED8kU-50DD-RD	40.3
CG8	ED8kU-50DD-RD	44.6
CG9	ED8kU-50DD-RD	42.6
F1	DSL70-OE	191.3
F2	DSL70-OE	180.2
FM1	PPSLS65-OE	84.5
FM2	PPSLS65-OE	81.2
FM3	PPSLS65-OE	88.4
FM4	PPSLS65-OE	77
FG1	PPSLS65-OE	68.5
FG2	PPSLS65-OE	57.2
FG3	PPSLS65-OE	45.3
FG4	PPSLS65-OE	46.5

FG5	PPSLS65-OE	40.6
FG6	PPSLS65-OE	31.1
FG7	PPSLS65-OE	39.3
FG8	PPSLS65-OE	42
F	ED7830-2400	115.1
SG1	PPSLS65-GN	72.9
SG2	PPSLS65-GN	75
S	DSL70-GN	289.5
SAG1	PPSLS65-GN	80.2
SBG1	PPSLS65-GN	79.6

Full Line lengths for BANTAM2 - 12

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	446.9
AG2`	440.2
AG3`	439.2
AG4`	444.1
AG5`	443.2
AG6`	438.5
AG7`	438.8
AG8`	444
AG9`	442.5
AG10`	438.4
AG11`	434.6
AG12`	432.5
AG13`	430.3
AG14`	429.7
SAG1`	416.2
SG1`	409.1
BG1`	445.5
BG2`	438.6
BG3`	437.3
BG4`	441.8
BG5`	440.7
BG6`	435.8
BG7`	435.9
BG8`	440.9
BG9`	438.4
BG10`	434.3
BG11`	430.9
BG12`	429
BG13`	427.1
BG14`	426.6
SBG1`	415.7
SG2`	411.1
CG1`	457.9
CG2`	451
CG3`	449.5
CG4`	454.1
CG5`	452.6
CG6`	447.2
CG7`	446.8

CG8`	451.2
CG9`	447.4
CG10`	442.5
CG11`	438.1
CG12`	435.3
CG13`	432.4
CG14`	431.1
FG1`	456
FG2`	444.8
FG3`	429.6
FG4`	430.8
FG5`	421.1
FG6`	411.7
FG7`	408.4
FG8`	411.2
`	0

Line lengths for BANTAM2 - 14

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	314.3
A2	PPSL191-RD	318.3
A3	PPSL191-RD	230.9
AM1	ED8kU-90DD-RD	68
AM2	ED8kU-90DD-RD	66.2
AM3	ED8kU-90DD-RD	62.8
AM4	ED8kU-90DD-RD	65.7
AM5	ED8kU-90DD-RD	153.8
AM6	ED8kU-90DD-RD	149.2
AM7	ED8kU-90DD-RD	149.1
AG1	ED8kU-50DD-RD	52.2
AG10	ED8kU-50DD-RD	42.3
AG11	ED8kU-50DD-RD	43.3
AG12	ED8kU-50DD-RD	41.6
AG13	ED8kU-50DD-RD	40
AG14	ED8kU-50DD-RD	40.3
AG2	ED8kU-50DD-RD	45
AG3	ED8kU-50DD-RD	45.8
AG4	ED8kU-50DD-RD	51.2
AG5	ED8kU-50DD-RD	50.1
AG6	ED8kU-50DD-RD	45.2
AG7	ED8kU-50DD-RD	42.9
AG8	ED8kU-50DD-RD	48.7
AG9	ED8kU-50DD-RD	46.4
B1	PPSL191-YW	311.9
B2	PPSL191-YW	316.1
B3	PPSL191-YW	233.8
BM1	ED8kU-70DD-RD	68.2
BM2	ED8kU-70DD-RD	65.8
BM3	ED8kU-70DD-RD	62.1
BM4	ED8kU-70DD-RD	64.6
BM5	ED8kU-70DD-RD	147.4
BM6	ED8kU-70DD-RD	143.8
BM7	ED8kU-70DD-RD	145.3
BG1	ED8kU-50DD-RD	51.9
BG10	ED8kU-50DD-RD	41.4
BG11	ED8kU-50DD-RD	41.7
BG12	ED8kU-50DD-RD	40.2
BG13	ED8kU-50DD-RD	37.4

BG14	ED8kU-50DD-RD	37.6
BG2	ED8kU-50DD-RD	44.6
BG3	ED8kU-50DD-RD	45.8
BG4	ED8kU-50DD-RD	50.8
BG5	ED8kU-50DD-RD	49.7
BG6	ED8kU-50DD-RD	44.5
BG7	ED8kU-50DD-RD	42.5
BG8	ED8kU-50DD-RD	48
BG9	ED8kU-50DD-RD	45.4
C1	TSL140-BE	325.5
C2	TSL140-BE	327.8
C3	TSL140-BE	243.3
CM1	ED8kU-70DD-RD	67.6
CM2	ED8kU-70DD-RD	65
CM3	ED8kU-70DD-RD	62.6
CM4	ED8kU-70DD-RD	63.6
CM5	ED8kU-70DD-RD	147.1
CM6	ED8kU-70DD-RD	141.6
CM7	ED8kU-70DD-RD	141.4
CG1	ED8kU-50DD-RD	51.9
CG10	ED8kU-50DD-RD	40.5
CG11	ED8kU-50DD-RD	41.8
CG12	ED8kU-50DD-RD	39.2
CG13	ED8kU-50DD-RD	37
CG14	ED8kU-50DD-RD	36.5
CG2	ED8kU-50DD-RD	44.5
CG3	ED8kU-50DD-RD	45.8
CG4	ED8kU-50DD-RD	50.7
CG5	ED8kU-50DD-RD	49.8
CG6	ED8kU-50DD-RD	44.1
CG7	ED8kU-50DD-RD	42.9
CG8	ED8kU-50DD-RD	47.8
CG9	ED8kU-50DD-RD	45.5
F1	DSL70-OE	211.7
F2	DSL70-OE	194.4
FM1	PPSLS65-OE	90.1
FM2	PPSLS65-OE	87.5
FM3	PPSLS65-OE	93
FM4	PPSLS65-OE	84.2
FG1	PPSLS65-OE	73.3
FG2	PPSLS65-OE	61.5
FG3	PPSLS65-OE	48.2
FG4	PPSLS65-OE	50

FG5	PPSLS65-OE	43.1
FG6	PPSLS65-OE	34
FG7	PPSLS65-OE	40.8
FG8	PPSLS65-OE	45.7
F	ED7850-2400	141.8
SG1	PPSLS65-GN	78.2
SG2	PPSLS65-GN	80.2
S	DSL70-GN	321.7
SAG1	PPSLS65-GN	84.9
SBG1	PPSLS65-GN	84.2

Full Line lengths for BANTAM2 - 14

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	479.9
AG2`	472.9
AG3`	472
AG4`	477.4
AG5`	476.7
AG6`	471.9
AG7`	472.6
AG8`	478.5
AG9`	476.5
AG10`	472.5
AG11`	468.9
AG12`	467.3
AG13`	465.7
AG14`	466.1
SAG1`	453.1
SG1`	446.5
BG1`	477.7
BG2`	470.5
BG3`	469.3
BG4`	474.4
BG5`	473.4
BG6`	468.4
BG7`	468.8
BG8`	474.5
BG9`	472.1
BG10`	468.1
BG11`	464.9
BG12`	463.5
BG13`	462.2
BG14`	462.6
SBG1`	452.5
SG2`	448.6
CG1`	490.6
CG2`	483.3
CG3`	482
CG4`	487.1
CG5`	485.7
CG6`	480.2
CG7`	480.1

CG8`	485
CG9`	481.3
CG10`	476.4
CG11`	472.2
CG12`	469.7
CG13`	467.4
CG14`	467
FG1`	501.2
FG2`	489.4
FG3`	473.5
FG4`	475.4
FG5`	456.8
FG6`	447.7
FG7`	445.8
FG8`	450.7
`	0