NOVA BANTAM 2

Table of contents

Line plan for BANTAM 2

Line lengths for BANTAM 2 - 12

Full Line lengths for BANTAM 2 - 12

Line lengths for BANTAM 2 - 14

Full Line lengths for BANTAM 2 - 14

Line lengths for BANTAM 2 - X

Full Line lengths for BANTAM 2 - X

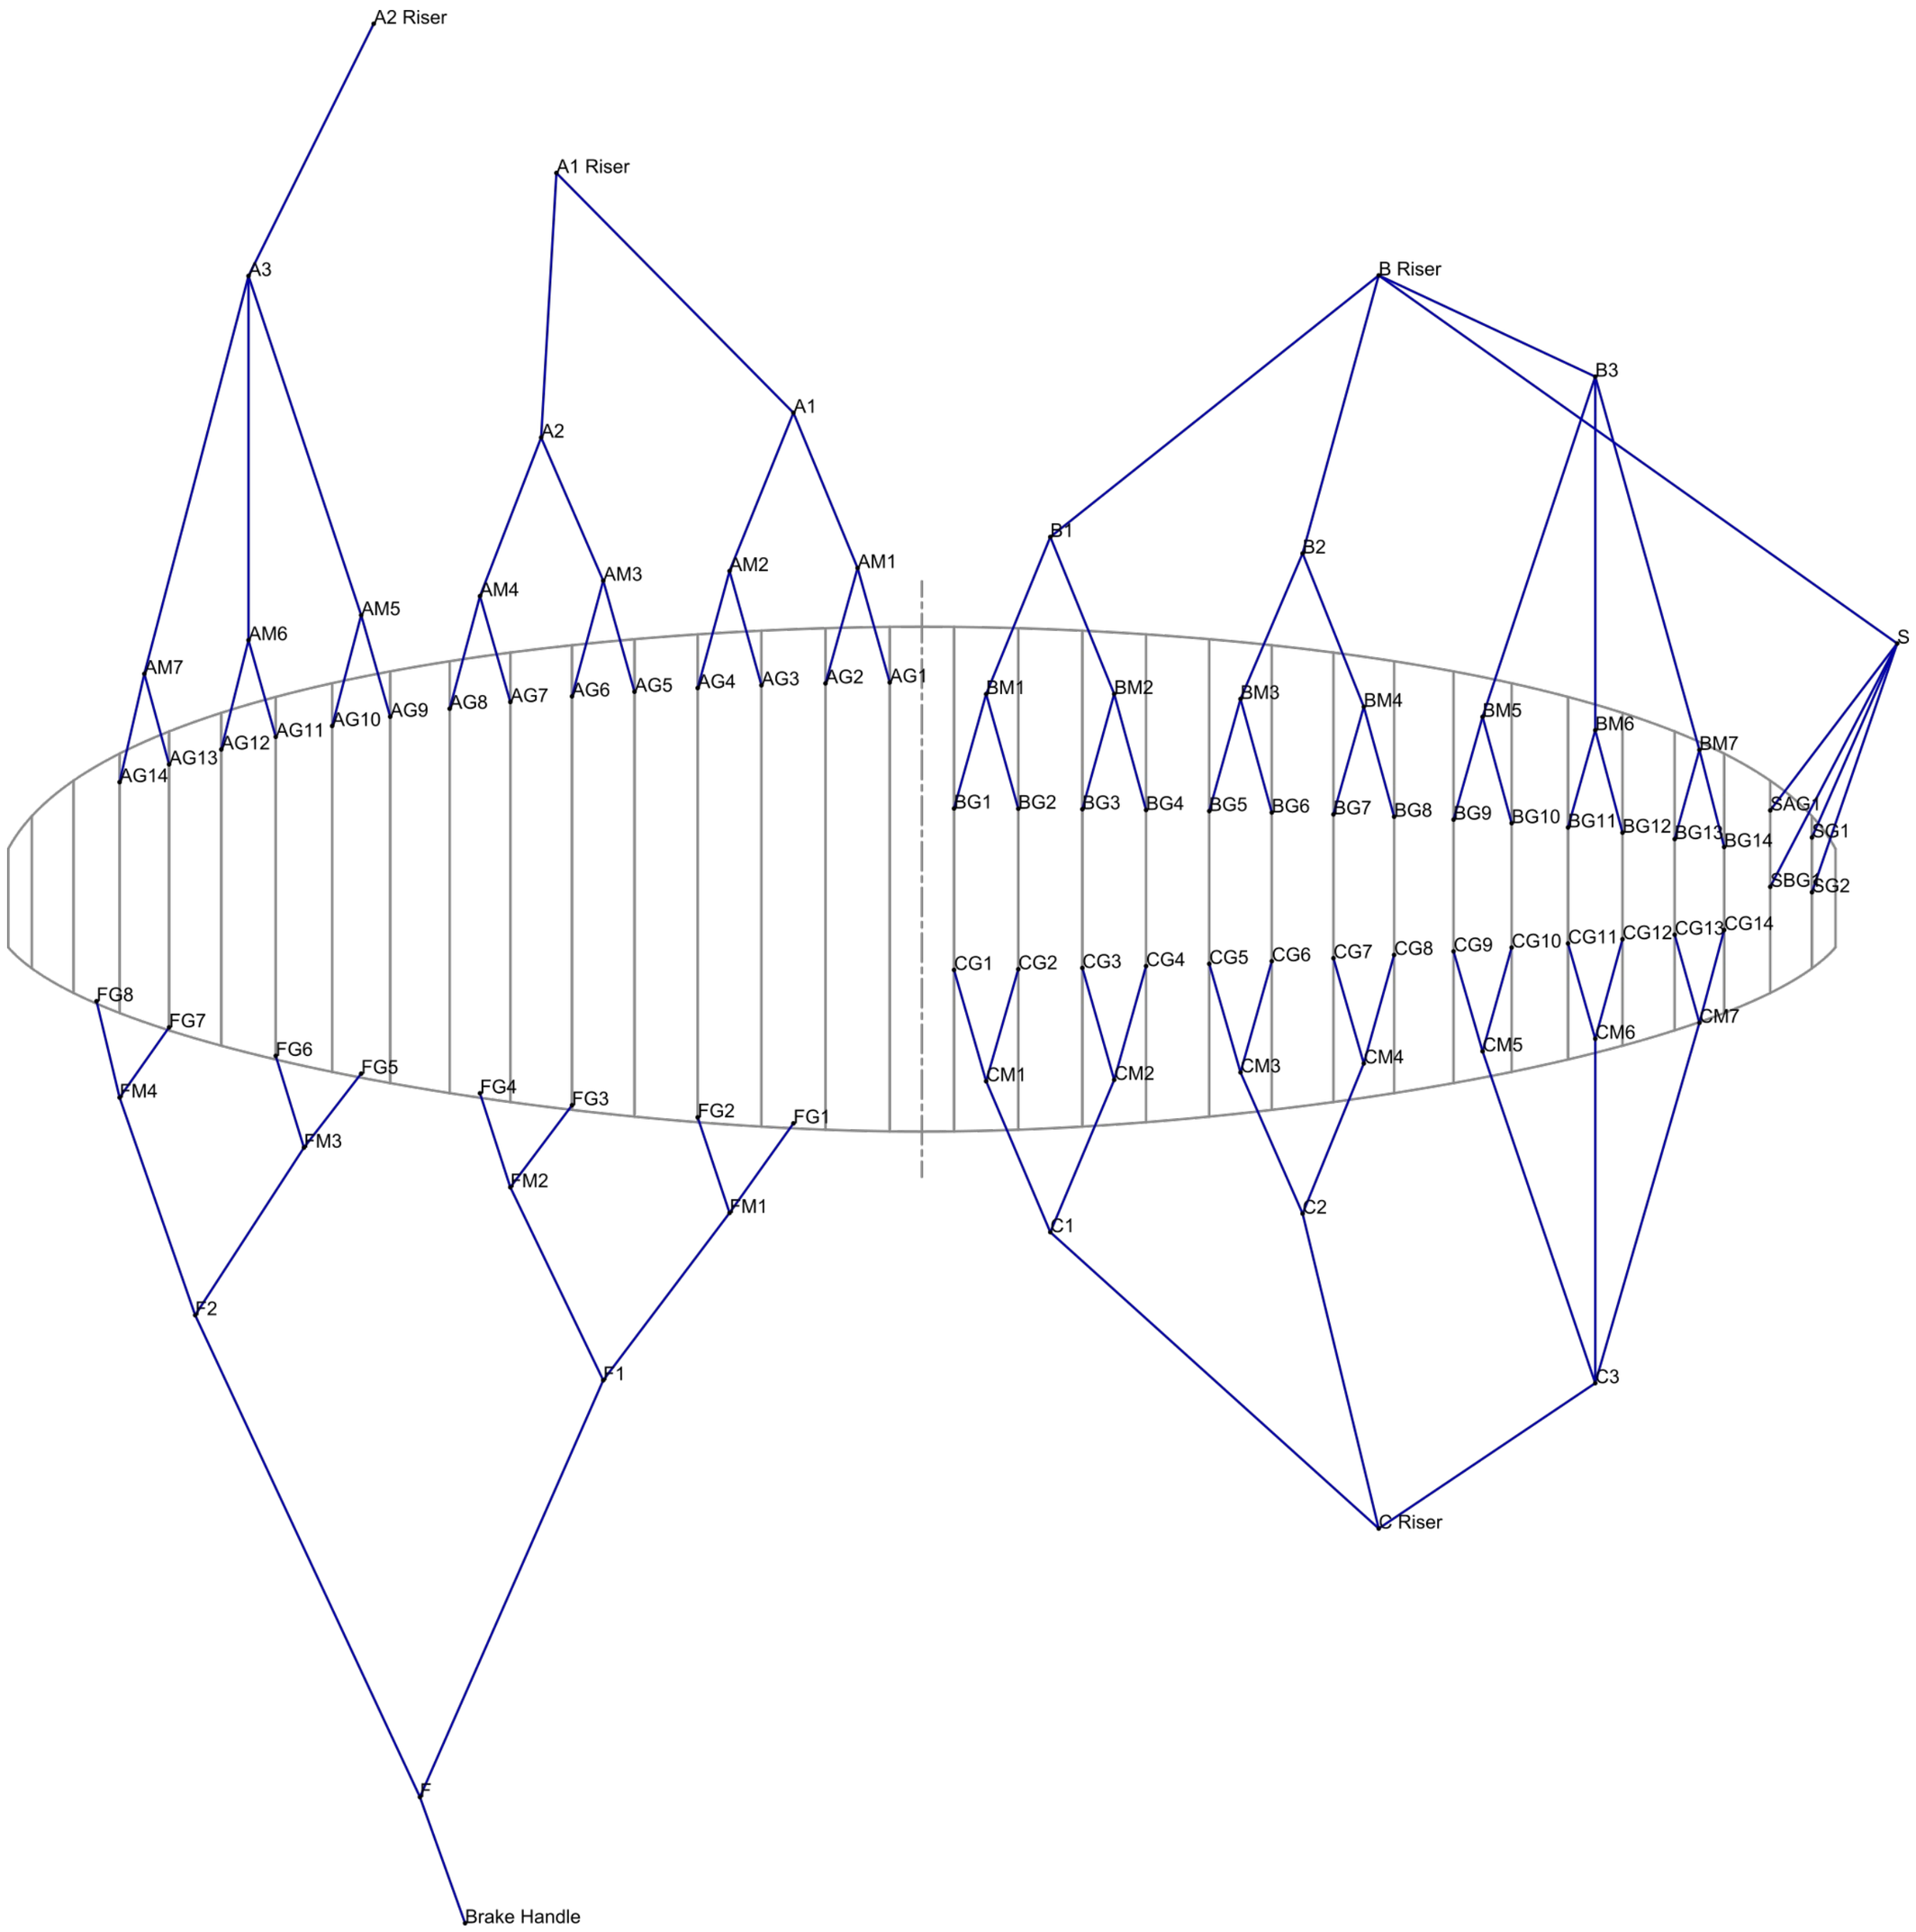
A2 Riser
A1 Riser
A3
A2
A1
AM7
AM6
AM5
AM4
AM3
AM2
AM1
AG14
AG13
AG12
AG11
AG10
AG9
AG8
AG7
AG6
AG5
AG4
AG3
AG2
AG1
B Riser
B3
B1
B2
S
BM1
BM2
BM3
BM4
BM5
BM6
BM7
BG1
BG2
BG3
BG4
BG5
BG6
BG7
BG8
BG9
BG10
BG11
BG12
BG13
BG14
SAG1
SG1
SBG
SG2
CG1
CG2
CG3
CG4
CG5
CG6
CG7
CG8
CG9
CG10
CG11
CG12
CG13
CG14
FG8
FG7
FG6
FG5
FG4
FG3
FG2
FG1
CM1
CM2
CM3
CM4
CM5
CM6
CM7
FM4
FM3
FM2
FM1
C1
C2
C3
F2
F1
C Riser
F
Brake Handle

Line lengths for BANTAM2 - 12

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	289
A2	PPSL191-RD	291.8
A3	PPSL191-RD	209.4
AM1	ED8kU-90DD-RD	63.7
AM2	ED8kU-90DD-RD	61.5
AM3	ED8kU-90DD-RD	59
AM4	ED8kU-90DD-RD	61
AM5	ED8kU-90DD-RD	144.3
AM6	ED8kU-90DD-RD	139
AM7	ED8kU-90DD-RD	137.4
AG1	ED8kU-50DD-RD	48.7
AG10	ED8kU-50DD-RD	39.2
AG11	ED8kU-50DD-RD	40.7
AG12	ED8kU-50DD-RD	38.4
AG13	ED8kU-50DD-RD	37.8
AG14	ED8kU-50DD-RD	37.1
AG2	ED8kU-50DD-RD	41.9
AG3	ED8kU-50DD-RD	43
AG4	ED8kU-50DD-RD	47.7
AG5	ED8kU-50DD-RD	46.8
AG6	ED8kU-50DD-RD	42
AG7	ED8kU-50DD-RD	40.3
AG8	ED8kU-50DD-RD	45.4
AG9	ED8kU-50DD-RD	43.5
B1	PPSL191-YW	287.5
B2	PPSL191-YW	290.3
B3	PPSL191-YW	211.9
BM1	ED8kU-70DD-RD	64
BM2	ED8kU-70DD-RD	61.2
BM3	ED8kU-70DD-RD	58.4
BM4	ED8kU-70DD-RD	59.9
BM5	ED8kU-70DD-RD	138.5
BM6	ED8kU-70DD-RD	134.2
BM7	ED8kU-70DD-RD	134.1
BG1	ED8kU-50DD-RD	48.5
BG10	ED8kU-50DD-RD	38.4
BG11	ED8kU-50DD-RD	39.2
BG12	ED8kU-50DD-RD	37.2
BG13	ED8kU-50DD-RD	35.4

BG14	ED8kU-50DD-RD	34.7
BG2	ED8kU-50DD-RD	41.5
BG3	ED8kU-50DD-RD	42.9
BG4	ED8kU-50DD-RD	47.3
BG5	ED8kU-50DD-RD	46.4
BG6	ED8kU-50DD-RD	41.4
BG7	ED8kU-50DD-RD	39.9
BG8	ED8kU-50DD-RD	44.7
BG9	ED8kU-50DD-RD	42.6
C1	TSL140-BE	300.6
C2	TSL140-BE	301.7
C3	TSL140-BE	221
CM1	ED8kU-70DD-RD	63.3
CM2	ED8kU-70DD-RD	60.3
CM3	ED8kU-70DD-RD	58.8
CM4	ED8kU-70DD-RD	59.1
CM5	ED8kU-70DD-RD	138.3
CM6	ED8kU-70DD-RD	132.2
CM7	ED8kU-70DD-RD	130.6
CG1	ED8kU-50DD-RD	48.4
CG10	ED8kU-50DD-RD	37.6
CG11	ED8kU-50DD-RD	39.3
CG12	ED8kU-50DD-RD	36.3
CG13	ED8kU-50DD-RD	35
CG14	ED8kU-50DD-RD	33.6
CG2	ED8kU-50DD-RD	41.4
CG3	ED8kU-50DD-RD	42.9
CG4	ED8kU-50DD-RD	47.3
CG5	ED8kU-50DD-RD	46.5
CG6	ED8kU-50DD-RD	41
CG7	ED8kU-50DD-RD	40.3
CG8	ED8kU-50DD-RD	44.6
CG9	ED8kU-50DD-RD	42.6
F1	DSL70-OE	191.3
F2	DSL70-OE	180.2
FM1	PPSLS65-OE	84.5
FM2	PPSLS65-OE	81.2
FM3	PPSLS65-OE	88.4
FM4	PPSLS65-OE	77
FG1	PPSLS65-OE	68.5
FG2	PPSLS65-OE	57.2
FG3	PPSLS65-OE	45.3
FG4	PPSLS65-OE	46.5

FG5	PPSLS65-OE	40.6
FG6	PPSLS65-OE	31.1
FG7	PPSLS65-OE	39.3
FG8	PPSLS65-OE	42
F	ED7830-240O	115.1
SG1	PPSLS65-GN	72.9
SG2	PPSLS65-GN	75
S	DSL70-GN	289.5
SAG1	PPSLS65-GN	80.2
SBG1	PPSLS65-GN	79.6

Full Line lengths for BANTAM2 - 12

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	446.9
AG2`	440.2
AG3`	439.2
AG4`	444.1
AG5`	443.2
AG6`	438.5
AG7`	438.8
AG8`	444
AG9`	442.5
AG10`	438.4
AG11`	434.6
AG12`	432.5
AG13`	430.3
AG14`	429.7
SAG1`	416.2
SG1`	409.1
BG1`	445.5
BG2`	438.6
BG3`	437.3
BG4`	441.8
BG5`	440.7
BG6`	435.8
BG7`	435.9
BG8`	440.9
BG9`	438.4
BG10`	434.3
BG11`	430.9
BG12`	429
BG13`	427.1
BG14`	426.6
SBG1`	415.7
SG2`	411.1
CG1`	457.9
CG2`	451
CG3`	449.5
CG4`	454.1
CG5`	452.6
CG6`	447.2
CG7`	446.8

CG8`	451.2
CG9`	447.4
CG10`	442.5
CG11`	438.1
CG12`	435.3
CG13`	432.4
CG14`	431.1
FG1`	456
FG2`	444.8
FG3`	429.6
FG4`	430.8
FG5`	421.1
FG6`	411.7
FG7`	408.4
FG8`	411.2

Line lengths for BANTAM2 - 14

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	314.3
A2	PPSL191-RD	318.3
A3	PPSL191-RD	230.9
AM1	ED8kU-90DD-RD	68
AM2	ED8kU-90DD-RD	66.2
AM3	ED8kU-90DD-RD	62.8
AM4	ED8kU-90DD-RD	65.7
AM5	ED8kU-90DD-RD	153.8
AM6	ED8kU-90DD-RD	149.2
AM7	ED8kU-90DD-RD	149.1
AG1	ED8kU-50DD-RD	52.2
AG10	ED8kU-50DD-RD	42.3
AG11	ED8kU-50DD-RD	43.3
AG12	ED8kU-50DD-RD	41.6
AG13	ED8kU-50DD-RD	40
AG14	ED8kU-50DD-RD	40.3
AG2	ED8kU-50DD-RD	45
AG3	ED8kU-50DD-RD	45.8
AG4	ED8kU-50DD-RD	51.2
AG5	ED8kU-50DD-RD	50.1
AG6	ED8kU-50DD-RD	45.2
AG7	ED8kU-50DD-RD	42.9
AG8	ED8kU-50DD-RD	48.7
AG9	ED8kU-50DD-RD	46.4
B1	PPSL191-YW	311.9
B2	PPSL191-YW	316.1
B3	PPSL191-YW	233.8
BM1	ED8kU-70DD-RD	68.2
BM2	ED8kU-70DD-RD	65.8
BM3	ED8kU-70DD-RD	62.1
BM4	ED8kU-70DD-RD	64.6
BM5	ED8kU-70DD-RD	147.4
BM6	ED8kU-70DD-RD	143.8
BM7	ED8kU-70DD-RD	145.3
BG1	ED8kU-50DD-RD	51.9
BG10	ED8kU-50DD-RD	41.4
BG11	ED8kU-50DD-RD	41.7
BG12	ED8kU-50DD-RD	40.2
BG13	ED8kU-50DD-RD	37.4

BG14	ED8kU-50DD-RD	37.6
BG2	ED8kU-50DD-RD	44.6
BG3	ED8kU-50DD-RD	45.8
BG4	ED8kU-50DD-RD	50.8
BG5	ED8kU-50DD-RD	49.7
BG6	ED8kU-50DD-RD	44.5
BG7	ED8kU-50DD-RD	42.5
BG8	ED8kU-50DD-RD	48
BG9	ED8kU-50DD-RD	45.4
C1	TSL140-BE	325.5
C2	TSL140-BE	327.8
C3	TSL140-BE	243.3
CM1	ED8kU-70DD-RD	67.6
CM2	ED8kU-70DD-RD	65
CM3	ED8kU-70DD-RD	62.6
CM4	ED8kU-70DD-RD	63.6
CM5	ED8kU-70DD-RD	147.1
CM6	ED8kU-70DD-RD	141.6
CM7	ED8kU-70DD-RD	141.4
CG1	ED8kU-50DD-RD	51.9
CG10	ED8kU-50DD-RD	40.5
CG11	ED8kU-50DD-RD	41.8
CG12	ED8kU-50DD-RD	39.2
CG13	ED8kU-50DD-RD	37
CG14	ED8kU-50DD-RD	36.5
CG2	ED8kU-50DD-RD	44.5
CG3	ED8kU-50DD-RD	45.8
CG4	ED8kU-50DD-RD	50.7
CG5	ED8kU-50DD-RD	49.8
CG6	ED8kU-50DD-RD	44.1
CG7	ED8kU-50DD-RD	42.9
CG8	ED8kU-50DD-RD	47.8
CG9	ED8kU-50DD-RD	45.5
F1	DSL70-OE	211.7
F2	DSL70-OE	194.4
FM1	PPSLS65-OE	90.1
FM2	PPSLS65-OE	87.5
FM3	PPSLS65-OE	93
FM4	PPSLS65-OE	84.2
FG1	PPSLS65-OE	73.3
FG2	PPSLS65-OE	61.5
FG3	PPSLS65-OE	48.2
FG4	PPSLS65-OE	50

FG5	PPSLS65-OE	43.1
FG6	PPSLS65-OE	34
FG7	PPSLS65-OE	40.8
FG8	PPSLS65-OE	45.7
F	ED7850-240O	141.8
SG1	PPSLS65-GN	78.2
SG2	PPSLS65-GN	80.2
S	DSL70-GN	321.7
SAG1	PPSLS65-GN	84.9
SBG1	PPSLS65-GN	84.2

Full Line lengths for BANTAM2 - 14

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	479.9
AG2`	472.9
AG3`	472
AG4`	477.4
AG5`	476.7
AG6`	471.9
AG7`	472.6
AG8`	478.5
AG9`	476.5
AG10`	472.5
AG11`	468.9
AG12`	467.3
AG13`	465.7
AG14`	466.1
SAG1`	453.1
SG1`	446.5
BG1`	477.7
BG2`	470.5
BG3`	469.3
BG4`	474.4
BG5`	473.4
BG6`	468.4
BG7`	468.8
BG8`	474.5
BG9`	472.1
BG10`	468.1
BG11`	464.9
BG12`	463.5
BG13`	462.2
BG14`	462.6
SBG1`	452.5
SG2`	448.6
CG1`	490.6
CG2`	483.3
CG3`	482
CG4`	487.1
CG5`	485.7
CG6`	480.2
CG7`	480.1

CG8`	485
CG9`	481.3
CG10`	476.4
CG11`	472.2
CG12`	469.7
CG13`	467.4
CG14`	467
FG1`	501.2
FG2`	489.4
FG3`	473.5
FG4`	475.4
FG5`	456.8
FG6`	447.7
FG7`	445.8
FG8`	450.7

Line lengths for BANTAM2 - X

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	192.2
A2	PPSL191-RD	197.5
A3	PPSL191-RD	128.3
AM1	ED8kU-90DD-RD	60.6
AM2	ED8kU-90DD-RD	58.1
AM3	ED8kU-90DD-RD	54.1
AM4	ED8kU-90DD-RD	59.6
AM5	ED8kU-90DD-RD	131.9
AM6	ED8kU-90DD-RD	132.1
AM7	ED8kU-90DD-RD	133.8
AG1	ED8kU-50DD-RD	46.2
AG10	ED8kU-50DD-RD	38.8
AG11	ED8kU-50DD-RD	37.4
AG12	ED8kU-50DD-RD	37.4
AG13	ED8kU-50DD-RD	35.1
AG14	ED8kU-50DD-RD	35.2
AG2	ED8kU-50DD-RD	39.7
AG3	ED8kU-50DD-RD	41
AG4	ED8kU-50DD-RD	45.2
AG5	ED8kU-50DD-RD	44
AG6	ED8kU-50DD-RD	40.9
AG7	ED8kU-50DD-RD	37.2
AG8	ED8kU-50DD-RD	43.2
AG9	ED8kU-50DD-RD	40.4
B1	PPSL191-YW	189.9
B2	PPSL191-YW	195.2
B3	PPSL191-YW	132.3
BM1	ED8kU-70DD-RD	61
BM2	ED8kU-70DD-RD	57.8
BM3	ED8kU-70DD-RD	53.6
BM4	ED8kU-70DD-RD	58.6
BM5	ED8kU-70DD-RD	124.9
BM6	ED8kU-70DD-RD	126.9
BM7	ED8kU-70DD-RD	130.9
BG1	ED8kU-50DD-RD	46.1
BG10	ED8kU-50DD-RD	38.2
BG11	ED8kU-50DD-RD	35.8
BG12	ED8kU-50DD-RD	36.2
BG13	ED8kU-50DD-RD	32.1

BG14	ED8kU-50DD-RD	32.5
BG2	ED8kU-50DD-RD	39.4
BG3	ED8kU-50DD-RD	41.1
BG4	ED8kU-50DD-RD	44.9
BG5	ED8kU-50DD-RD	43.8
BG6	ED8kU-50DD-RD	40.5
BG7	ED8kU-50DD-RD	37
BG8	ED8kU-50DD-RD	42.7
BG9	ED8kU-50DD-RD	39.4
C1	TSL140-BE	205.1
C2	TSL140-BE	207.9
C3	TSL140-BE	141.7
CM1	ED8kU-70DD-RD	60.6
CM2	ED8kU-70DD-RD	57
CM3	ED8kU-70DD-RD	54.4
CM4	ED8kU-70DD-RD	57.6
CM5	ED8kU-70DD-RD	125.3
CM6	ED8kU-70DD-RD	124.8
CM7	ED8kU-70DD-RD	126.9
CG1	ED8kU-50DD-RD	46.2
CG10	ED8kU-50DD-RD	37.4
CG11	ED8kU-50DD-RD	36.1
CG12	ED8kU-50DD-RD	35.1
CG13	ED8kU-50DD-RD	31.5
CG14	ED8kU-50DD-RD	30.8
CG2	ED8kU-50DD-RD	39.2
CG3	ED8kU-50DD-RD	41.2
CG4	ED8kU-50DD-RD	44.9
CG5	ED8kU-50DD-RD	44.1
CG6	ED8kU-50DD-RD	40
CG7	ED8kU-50DD-RD	37.6
CG8	ED8kU-50DD-RD	42.6
CG9	ED8kU-50DD-RD	39.8
F1	DSL70-OE	118.7
F2	DSL70-OE	100.3
FM1	PPSLS65-OE	87.2
FM2	PPSLS65-OE	64.4
FM3	PPSLS65-OE	78.7
FM4	PPSLS65-OE	75.1
FG1	PPSLS65-OE	56.9
FG2	PPSLS65-OE	41
FG3	PPSLS65-OE	47.9
FG4	PPSLS65-OE	37.7

FG5	PPSLS65-OE	37.4
FG6	PPSLS65-OE	31.7
FG7	PPSLS65-OE	30.4
FG8	PPSLS65-OE	32.2
F	ED7850-240O	111.5
SG1	PPSLS65-GN	69
SG2	PPSLS65-GN	71.3
S	DSL70-GN	208.9
SAG1	PPSLS65-GN	76.4
SBG1	PPSLS65-GN	76.4

Full Line lengths for BANTAM2 - X

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	3446
AG2`	3382
AG3`	3370
AG4`	3413
AG5`	3412
AG6`	3382
AG7`	3400
AG8`	3462
AG9`	3460
AG10`	3446
AG11`	3434
AG12`	3435
AG13`	3429
AG14`	3432
SAG1`	3318
SG1`	3245
BG1`	3426
BG2`	3360
BG3`	3346
BG4`	3385
BG5`	3382
BG6`	3350
BG7`	3366
BG8`	3424
BG9`	3421
BG10`	3411
BG11`	3406
BG12`	3412
BG13`	3411
BG14`	3416
SBG1`	3319
SG2`	3269
CG1`	3574
CG2`	3506
CG3`	3490
CG4`	3528
CG5`	3520
CG6`	3480
CG7`	3489

CG8`	3540
CG9`	3522
CG10`	3500
CG11`	3482
CG12`	3474
CG13`	3459
CG14`	3453
FG1`	3730
FG2`	3571
FG3`	3412
FG4`	3311
FG5`	3266
FG6`	3210
FG7`	3161
FG8`	3179