

Table of contents

Line plan for CODEX

Line lengths for CODEX - XXS

Full Line lengths for CODEX - XXS

Line lengths for CODEX - XS

Full Line lengths for CODEX - XS

Line lengths for CODEX - S

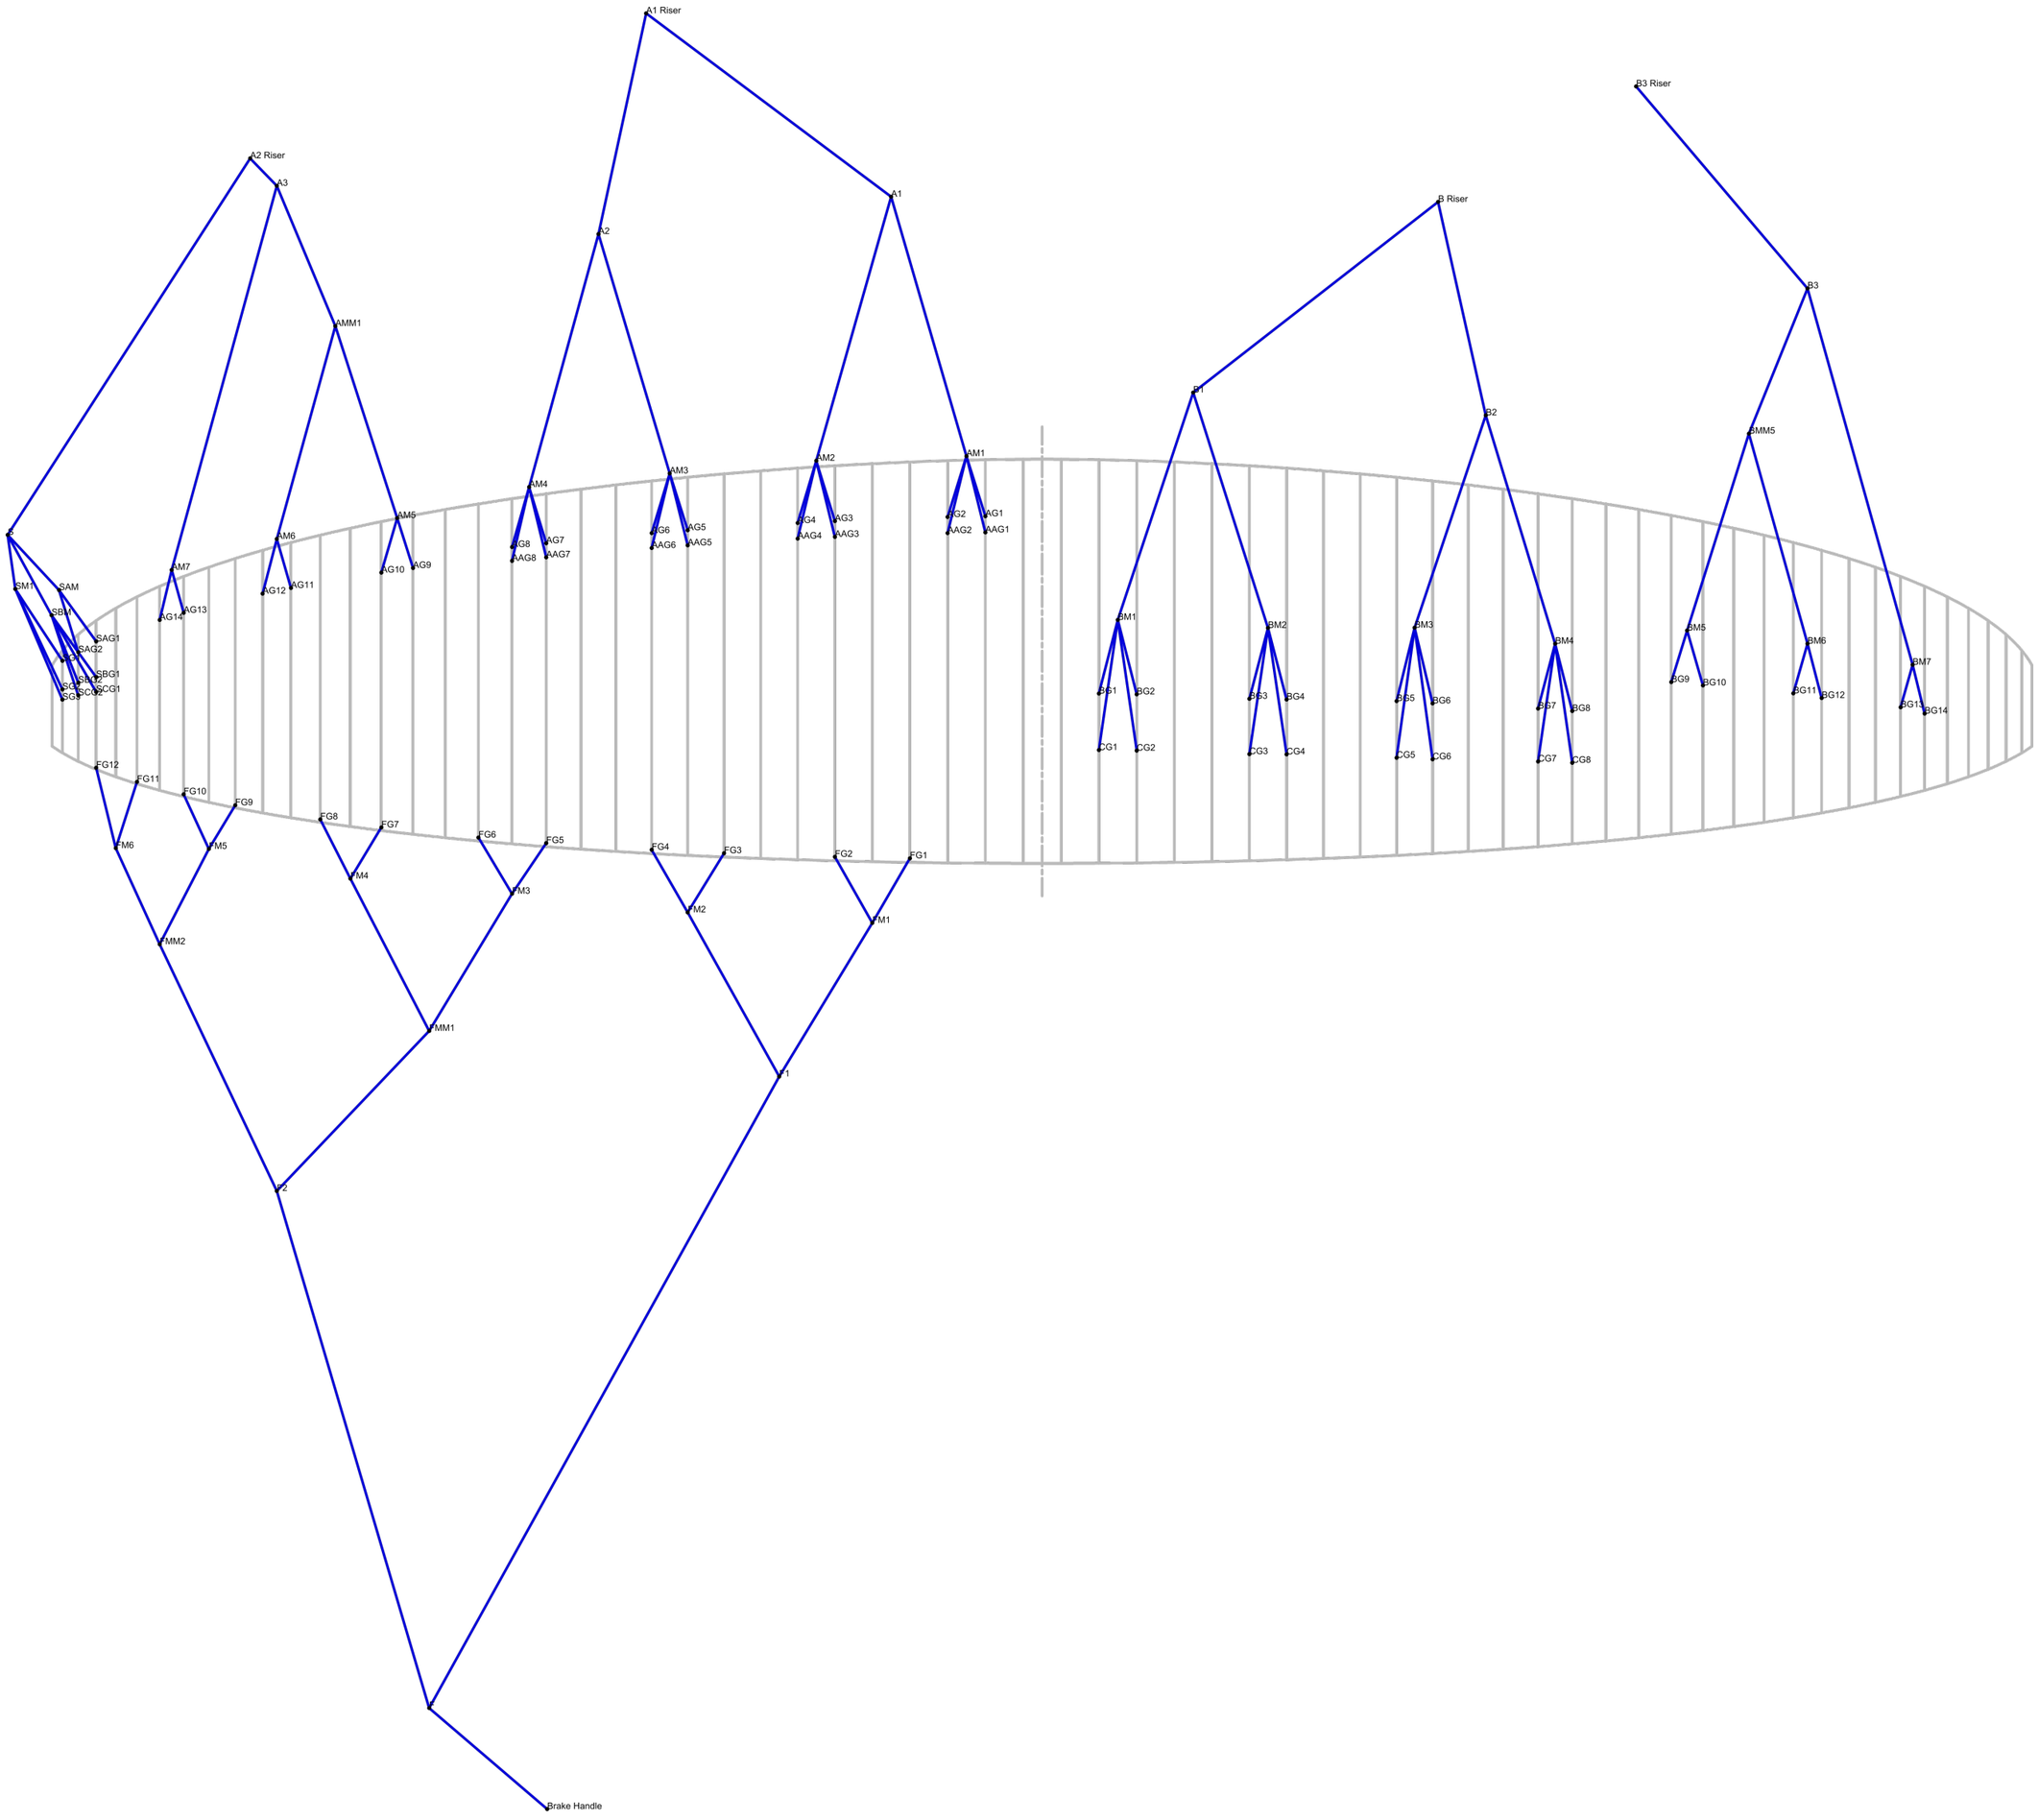
Full Line lengths for CODEX - S

Line lengths for CODEX - M

Full Line lengths for CODEX - M

Line lengths for CODEX - L

Full Line lengths for CODEX - L


A1 Riser
A2 Riser
A3
AMM1
A2
A1
B3 Riser
B Riser
B3
B2
B1
BMM5
AM1
AM2
AM3
AM4
AM5
AM6
AM7
AG1
AG2
AG3
AG4
AG5
AG6
AG7
AG8
AG9
AG10
AG11
AG12
AG13
AG14
AAG1
AAG2
AAG3
AAG4
AAG5
AAG6
AAG7
AAG8
SAM1
SAM
SBM1
SAG1
SAG2
SBG1
SCG1
BM1
BM2
BM3
BM4
BM5
BM6
BM7
BG1
BG2
BG3
BG4
BG5
BG6
BG7
BG8
BG9
BG10
BG11
BG12
BG13
BG14
CG1
CG2
CG3
CG4
CG5
CG6
CG7
CG8
FG12
FG11
FG10
FG9
FG8
FG7
FG6
FG5
FG4
FG3
FG2
FG1
FM6
FM5
FM4
FM3
FM2
FM1
FMM2
FMM1
2
1
E
Brake Handle

Line lengths for CODEX - XXS

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL200M-RD	460.4
A2	PPSL200M-RD	461.3
A3	PPSL200M-RD	395.8
AM1	ED8kU-130DD-RD	136.8
AM2	ED8kU-130DD-RD	132.5
AM3	ED8kU-130DD-RD	127.6
AM4	ED8kU-130DD-RD	122
AM5	ED8kU-90DD-RD	107.3
AM6	ED8kU-90DD-RD	91.6
AM7	ED8kU-90DD-RD	163.9
AMM1	ED8kU-190DD-RD	79.1
AG1	ED8kU-50DD-RD	38.6
AG10	DC40-RD	22.6
AG11	DC40-RD	25.4
AG12	DC40-RD	24.8
AG13	DC40-RD	21.9
AG14	DC40-RD	22.1
AG2	ED8kU-50DD-RD	33.9
AG3	ED8kU-50DD-RD	35.2
AG4	ED8kU-50DD-RD	37.5
AG5	ED8kU-50DD-RD	36.7
AG6	ED8kU-50DD-RD	32
AG7	ED8kU-50DD-RD	32.8
AG8	ED8kU-50DD-RD	34.3
AG9	DC40-RD	29.1
AAG1	ED8kU-50DD-RD	37.3
AAG2	ED8kU-50DD-RD	32.5
AAG3	ED8kU-50DD-RD	33.8
AAG4	ED8kU-50DD-RD	36.3
AAG5	ED8kU-50DD-RD	35.3
AAG6	ED8kU-50DD-RD	30.8
AAG7	ED8kU-50DD-RD	31.6
AAG8	ED8kU-50DD-RD	33.4
B1	ED8k1U-130D-BE	457.8
B2	ED8k1U-130D-BE	456.2
B3	ED8k1U-130D-BE	378.1
BM1	ED8kU-70DD-RD	123.7
BM2	ED8kU-70DD-RD	122.9
BM3	ED8kU-50DD-RD	116.1

BM4	ED8kU-50DD-RD	115.6
BM5	ED8kU-50DD-RD	104.9
BM6	ED8kU-50DD-RD	93.7
BM7	ED8kU-50DD-RD	168.9
BMM5	ED8kU-70DD-RD	77.8
BG1	DC40-RD	48.5
BG10	DC40-RD	23.1
BG11	DC40-RD	24.7
BG12	DC40-RD	25.3
BG13	DC40-RD	20.3
BG14	DC40-RD	22.9
BG2	DC40-RD	43.8
BG3	DC40-RD	42.5
BG4	DC40-RD	45.4
BG5	DC40-RD	48.3
BG6	DC40-RD	43
BG7	DC40-RD	39.5
BG8	DC40-RD	40.2
BG9	DC40-RD	29
CG1	DC40-RD	62.9
CG2	DC40-RD	59.4
CG3	DC40-RD	58.1
CG4	DC40-RD	60.1
CG5	DC40-RD	62.7
CG6	DC40-RD	58.8
CG7	DC40-RD	54.6
CG8	DC40-RD	54.9
F1	DSL70-OE	360.8
F2	DSL70-OE	243.1
FM1	ED8kU-50DD-RD	101.6
FM2	ED8kU-50DD-RD	83.1
FM3	ED8kU-50DD-RD	98.2
FM4	ED8kU-50DD-RD	69.8
FM5	ED8kU-50DD-RD	52.1
FM6	ED8kU-50DD-RD	48.3
FMM1	ED8kU-50DD-RD	99.8
FMM2	ED8kU-50DD-RD	104.7
FG1	DC40-RD	48.8
FG10	DC40-RD	24.2
FG11	DC40-RD	22.8
FG12	DC40-RD	30.7
FG2	DC40-RD	27.4
FG3	DC40-RD	33.1

FG4	DC40-RD	36.2
FG5	DC40-RD	38.6
FG6	DC40-RD	21.4
FG7	DC40-RD	29.7
FG8	DC40-RD	29.9
FG9	DC40-RD	26.2
F	ED7850-240O	182.5
SM1	DC40-RD	16.6
SG1	DC40-RD	43.5
SG2	DC40-RD	44.6
SG3	DC40-RD	47
S	ED8kU-50DD-RD	493.9
SAG1	DC40-RD	27.5
SAG2	DC40-RD	23.9
SAM	DC40-RD	39
SBG1	DC40-RD	33.3
SBG2	DC40-RD	29.7
SBM	DC40-RD	33.3
SCG1	DC40-RD	36
SCG2	DC40-RD	32.5

Full Line lengths for CODEX - XXS

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	6829.899965
AA1R`	6818.154462
A2R`	6785.81893
AA2R`	6773.346999
A3R`	6755.135054
AA3R`	6742.560857
A4R`	6780.28939
AA4R`	6770.208264
A5R`	6727.679772
AA5R`	6715.53686
A6R`	6683.544186
AA6R`	6672.280697
A7R`	6635.524045
AA7R`	6624.694756
A8R`	6652.763049
AA8R`	6645.176725
A9R`	6579.469367
A10R`	6514.941968
A11R`	6386.611985
A12R`	6381.872896
A13R`	6296.598846
A14R`	6299.927052
SA1R`	6091.393558
SA2R`	6056.072211
S1R`	6027.538902
B1R`	6779.785193
C1R`	6924.527816
B2R`	6733.84863
C2R`	6890.857525
B3R`	6714.308572
C3R`	6871.035001
B4R`	6743.911778
C4R`	6891.540089
B5R`	6687.265699
C5R`	6832.477187
B6R`	6635.806471
C6R`	6794.250862
B7R`	6596.408421
C7R`	6747.372813

B8R`	6604.385986
C8R`	6751.496094
B9R`	6502.420237
B10R`	6444.881312
B11R`	6348.655303
B12R`	6355.395641
B13R`	6286.60684
B14R`	6312.62741
SB1R`	6091.244326
SC1R`	6119.184588
SB2R`	6056.880392
SC2R`	6085.328264
S2R`	6039.238955
S3R`	6063.692082
F1R`	6914.199888
F2R`	6700.521735
F3R`	6573.79845
F4R`	6605.295915
F5R`	6593.647858
F6R`	6421.980091
F7R`	6222.528922
F8R`	6224.964363
F9R`	6058.924951
F10R`	6039.422712
F11R`	5989.351489
F12R`	6068.4754

Line lengths for CODEX - XS

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSLS200M-RD	485.1
A2	PPSLS200-RD	486.4
A3	PPSLS200-RD	418.5
AM1	ED8kU-130DD-RD	144.3
AM2	ED8kU-130DD-RD	140.1
AM3	ED8kU-130DD-RD	134.3
AM4	ED8kU-130DD-RD	128.5
AM5	ED8kU-90DD-RD	112.6
AM6	ED8kU-90DD-RD	96.1
AM7	ED8kU-50DD-RD	172.1
AMM1	ED8kU-190DD-RD	82.4
AG1	ED8kU-50DD-RD	40.2
AG10	DC40	23.6
AG11	DC40	26.6
AG12	DC40	26
AG13	DC40	22.9
AG14	DC40	23.1
AG2	ED8kU-50DD-RD	35.4
AG3	ED8kU-50DD-RD	36.6
AG4	ED8kU-50DD-RD	39.2
AG5	ED8kU-50DD-RD	38.2
AG6	ED8kU-50DD-RD	33.4
AG7	ED8kU-50DD-RD	34.1
AG8	ED8kU-50DD-RD	35.8
AG9	DC40	30.5
AAG1	ED8kU-50DD-RD	38.9
AAG2	ED8kU-50DD-RD	34.1
AAG3	ED8kU-50DD-RD	35.2
AAG4	ED8kU-50DD-RD	38.1
AAG5	ED8kU-50DD-RD	36.9
AAG6	ED8kU-50DD-RD	32.2
AAG7	ED8kU-50DD-RD	32.9
AAG8	ED8kU-50DD-RD	34.9
B1	ED8001-130D-BE	482.4
B2	ED8001-130D-BE	481.1
B3	ED8001-130D-BE	400.4
BM1	ED8kU-70DD-RD	130.7
BM2	ED8kU-70DD-RD	130.1
BM3	ED8kU-50DD-RD	122.8

BM4	ED8kU-50DD-RD	122.3
BM5	ED8kU-50DD-RD	110.3
BM6	ED8kU-50DD-RD	98.5
BM7	ED8kU-50DD-RD	177.5
BMM5	ED8kU-70DD-RD	81.5
BG1	DC40	51
BG10	DC40	24.3
BG11	DC40	25.9
BG12	DC40	26.5
BG13	DC40	21.3
BG14	DC40	23.9
BG2	DC40	46.1
BG3	DC40	44.8
BG4	DC40	47.8
BG5	DC40	50.9
BG6	DC40	45.3
BG7	DC40	41.6
BG8	DC40	42.3
BG9	DC40	30.5
CG1	DC40	66.2
CG2	DC40	62.5
CG3	DC40	61.2
CG4	DC40	63.2
CG5	DC40	66
CG6	DC40	61.8
CG7	DC40	57.4
CG8	DC40	57.6
F1	DSL70-OE	376.4
F2	DSL70-OE	254.2
FM1	ED8kU-50DD-RD	107.2
FM2	ED8kU-50DD-RD	87.9
FM3	ED8kU-50DD-RD	103.3
FM4	ED8kU-50DD-RD	74
FM5	ED8kU-50DD-RD	53.5
FM6	ED8kU-50DD-RD	51.1
FMM1	ED8kU-50DD-RD	103
FMM2	ED8kU-50DD-RD	110.2
FG1	DC40	51.7
FG10	DC40	25.5
FG11	DC40	22.8
FG12	DC40	31.7
FG2	DC40	29
FG3	DC40	35

FG4	DC40	38.3
FG5	DC40	40.7
FG6	DC40	22.6
FG7	DC40	31.2
FG8	DC40	31.5
FG9	DC40	27.2
F	ED7830-240O	194.7
SM1	DC40	20.5
SG1	DC40	42.9
SG2	DC40	44.2
SG3	DC40	46.6
S	ED8kU-50DD-RD	521.5
SAG1	DC40	29
SAG2	DC40	25.3
SAM	DC40	41.1
SBG1	DC40	34.7
SBG2	DC40	31
SBM	DC40	35.5
SCG1	DC40	37.4
SCG2	DC40	33.8

Full Line lengths for CODEX - XS

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	7178
AA1R`	7166
A2R`	7132
AA2R`	7119
A3R`	7101
AA3R`	7088
A4R`	7128
AA4R`	7118
A5R`	7073
AA5R`	7061
A6R`	7027
AA6R`	7015
A7R`	6976
AA7R`	6965
A8R`	6995
AA8R`	6987
A9R`	6922
A10R`	6854
A11R`	6718
A12R`	6713
A13R`	6621
A14R`	6625
SA1R`	6401
SA2R`	6365
S1R`	6336
B1R`	7126
C1R`	7278
B2R`	7078
C2R`	7243
B3R`	7059
C3R`	7223
B4R`	7090
C4R`	7245
B5R`	7031
C5R`	7184
B6R`	6977
C6R`	7143
B7R`	6935
C7R`	7093

B8R`	6944
C8R`	7097
B9R`	6840
B10R`	6779
B11R`	6676
B12R`	6683
B13R`	6608
B14R`	6635
SB1R`	6401
SC1R`	6428
SB2R`	6366
SC2R`	6394
S2R`	6349
S3R`	6374
F1R`	7327
F2R`	7101
F3R`	6967
F4R`	7001
F5R`	6982
F6R`	6802
F7R`	6594
F8R`	6598
F9R`	6423
F10R`	6407
F11R`	6356
F12R`	6445

Line lengths for CODEX - S

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSLS200M-RD	514.7
A2	PPSLS200-RD	516.4
A3	PPSLS200-RD	444.4
AM1	ED8kU-130DD-RD	151.8
AM2	ED8kU-130DD-RD	147.6
AM3	ED8kU-130DD-RD	141.3
AM4	ED8kU-130DD-RD	135.4
AM5	ED8kU-90DD-RD	118.5
AM6	ED8kU-90DD-RD	101.2
AM7	ED8kU-50DD-RD	181.3
AMM1	ED8kU-190DD-RD	86.7
AG1	ED8kU-50DD-RD	42.3
AG10	DC40	24.9
AG11	DC40	28
AG12	DC40	27.4
AG13	DC40	24.1
AG14	DC40	24.3
AG2	ED8kU-50DD-RD	37.3
AG3	ED8kU-50DD-RD	38.5
AG4	ED8kU-50DD-RD	41.2
AG5	ED8kU-50DD-RD	40.2
AG6	ED8kU-50DD-RD	35.2
AG7	ED8kU-50DD-RD	35.9
AG8	ED8kU-50DD-RD	37.7
AG9	DC40	32.1
AAG1	ED8kU-50DD-RD	40.9
AAG2	ED8kU-50DD-RD	35.9
AAG3	ED8kU-50DD-RD	37
AAG4	ED8kU-50DD-RD	40.1
AAG5	ED8kU-50DD-RD	38.8
AAG6	ED8kU-50DD-RD	33.9
AAG7	ED8kU-50DD-RD	34.6
AAG8	ED8kU-50DD-RD	36.8
B1	ED8001-130D-BE	511.8
B2	ED8001-130D-BE	510.8
B3	ED8001-130D-BE	426.5
BM1	ED8kU-70DD-RD	137.5
BM2	ED8kU-70DD-RD	137.1
BM3	ED8kU-50DD-RD	129.2

BM4	ED8kU-50DD-RD	128.8
BM5	ED8kU-50DD-RD	116.2
BM6	ED8kU-50DD-RD	103.7
BM7	ED8kU-50DD-RD	186.8
BMM5	ED8kU-70DD-RD	85.8
BG1	DC40	53.7
BG10	DC40	25.6
BG11	DC40	27.3
BG12	DC40	27.9
BG13	DC40	22.4
BG14	DC40	25.2
BG2	DC40	48.5
BG3	DC40	47.1
BG4	DC40	50.4
BG5	DC40	53.5
BG6	DC40	47.7
BG7	DC40	43.8
BG8	DC40	44.5
BG9	DC40	32.1
CG1	DC40	69.6
CG2	DC40	65.8
CG3	DC40	64.4
CG4	DC40	66.6
CG5	DC40	69.5
CG6	DC40	65.1
CG7	DC40	60.4
CG8	DC40	60.7
F1	DSL70-OE	398.5
F2	DSL70-OE	269.4
FM1	ED8kU-50DD-RD	113
FM2	ED8kU-50DD-RD	92.9
FM3	ED8kU-50DD-RD	108.9
FM4	ED8kU-50DD-RD	77.8
FM5	ED8kU-50DD-RD	56.9
FM6	ED8kU-50DD-RD	53.4
FMM1	ED8kU-50DD-RD	109.5
FMM2	ED8kU-50DD-RD	116.4
FG1	DC40	54.4
FG10	DC40	26.8
FG11	DC40	24.9
FG12	DC40	33.8
FG2	DC40	30.6
FG3	DC40	36.8

FG4	DC40	40.3
FG5	DC40	42.9
FG6	DC40	23.8
FG7	DC40	32.8
FG8	DC40	33.1
FG9	DC40	28.8
F	ED7830-240O	209.4
SM1	DC40	21.6
SG1	DC40	45.2
SG2	DC40	46.5
SG3	DC40	49.1
S	ED8kU-50DD-RD	552.7
SAG1	DC40	30.5
SAG2	DC40	26.6
SAM	DC40	43.3
SBG1	DC40	36.5
SBG2	DC40	32.6
SBM	DC40	37.3
SCG1	DC40	39.3
SCG2	DC40	35.5

Full Line lengths for CODEX - S

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	7570
AA1R`	7557
A2R`	7522
AA2R`	7508
A3R`	7491
AA3R`	7477
A4R`	7520
AA4R`	7509
A5R`	7463
AA5R`	7450
A6R`	7415
AA6R`	7402
A7R`	7362
AA7R`	7350
A8R`	7382
AA8R`	7373
A9R`	7299
A10R`	7228
A11R`	7085
A12R`	7080
A13R`	6984
A14R`	6988
SA1R`	6750
SA2R`	6712
S1R`	6681
B1R`	7515
C1R`	7675
B2R`	7465
C2R`	7638
B3R`	7446
C3R`	7619
B4R`	7480
C4R`	7642
B5R`	7419
C5R`	7579
B6R`	7362
C6R`	7537
B7R`	7319
C7R`	7485

B8R`	7328
C8R`	7490
B9R`	7218
B10R`	7153
B11R`	7046
B12R`	7053
B13R`	6975
B14R`	7003
SB1R`	6750
SC1R`	6779
SB2R`	6713
SC2R`	6743
S2R`	6695
S3R`	6721
F1R`	7734
F2R`	7497
F3R`	7358
F4R`	7394
F5R`	7379
F6R`	7189
F7R`	6969
F8R`	6973
F9R`	6789
F10R`	6769
F11R`	6715
F12R`	6805

Line lengths for CODEX - M

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL275M-RD	533.4
A2	PPSL275M-RD	535.3
A3	PPSL275M-RD	461.2
AM1	ED8kU-190DD-RD	155.9
AM2	ED8kU-190DD-RD	151.6
AM3	ED8kU-190DD-RD	145.5
AM4	ED8kU-190DD-RD	139.5
AM5	ED8kU-190DD-RD	122.5
AM6	ED8kU-130DD-RD	104.5
AM7	ED8kU-90DD-RD	187
AMM1	ED8kU-230DD-RD	90.2
AG1	ED8kU-50DD-RD	43.9
AG10	DC40-RD	25.9
AG11	DC40-RD	28.9
AG12	DC40-RD	28.4
AG13	DC40-RD	24.9
AG14	DC40-RD	25.2
AG2	ED8kU-50DD-RD	38.7
AG3	ED8kU-50DD-RD	40
AG4	ED8kU-50DD-RD	42.7
AG5	ED8kU-50DD-RD	41.8
AG6	ED8kU-50DD-RD	36.5
AG7	ED8kU-50DD-RD	37.3
AG8	ED8kU-50DD-RD	39.1
AG9	DC40-RD	33.3
AAG1	ED8kU-50DD-RD	42.4
AAG2	ED8kU-50DD-RD	37.2
AAG3	ED8kU-50DD-RD	38.4
AAG4	ED8kU-50DD-RD	41.5
AAG5	ED8kU-50DD-RD	40.2
AAG6	ED8kU-50DD-RD	35.1
AAG7	ED8kU-50DD-RD	36
AAG8	ED8kU-50DD-RD	38.1
B1	ED8k1U-190D-BE	530.8
B2	ED8k1U-190D-BE	529.8
B3	ED8k1U-190D-BE	443.4
BM1	ED8kU-90DD-RD	140.8
BM2	ED8kU-90DD-RD	140.4
BM3	ED8kU-90DD-RD	132.4

BM4	ED8kU-90DD-RD	132.1
BM5	ED8kU-50DD-RD	119.5
BM6	ED8kU-90DD-RD	106.8
BM7	ED8kU-50DD-RD	192.5
BMM5	ED8kU-90DD-RD	88.6
BG1	DC40-RD	55.1
BG10	DC40-RD	26.3
BG11	DC40-RD	28.1
BG12	DC40-RD	28.8
BG13	DC40-RD	23.1
BG14	DC40-RD	26
BG2	DC40-RD	49.9
BG3	DC40-RD	48.4
BG4	DC40-RD	51.8
BG5	DC40-RD	55
BG6	DC40-RD	49.1
BG7	DC40-RD	45
BG8	DC40-RD	45.9
BG9	DC40-RD	33
CG1	DC40-RD	71.6
CG2	DC40-RD	67.7
CG3	DC40-RD	66.2
CG4	DC40-RD	68.6
CG5	DC40-RD	71.5
CG6	DC40-RD	67.1
CG7	DC40-RD	62.2
CG8	DC40-RD	62.6
F1	DSL70-OE	416.9
F2	DSL70-OE	281.9
FM1	ED8kU-50DD-RD	115.6
FM2	ED8kU-50DD-RD	95.2
FM3	ED8kU-50DD-RD	112
FM4	ED8kU-50DD-RD	79.3
FM5	ED8kU-50DD-RD	60.5
FM6	ED8kU-50DD-RD	54.8
FMM1	ED8kU-50DD-RD	116.2
FMM2	ED8kU-50DD-RD	119.9
FG1	DC40-RD	55.6
FG10	DC40-RD	27.2
FG11	DC40-RD	26.8
FG12	DC40-RD	34.8
FG2	DC40-RD	31.4
FG3	DC40-RD	37.6

FG4	DC40-RD	41.3
FG5	DC40-RD	44
FG6	DC40-RD	24.2
FG7	DC40-RD	33.9
FG8	DC40-RD	34
FG9	DC40-RD	30.1
F	ED7850-240O	206.4
SM1	DC40-RD	18.7
SG1	DC40-RD	49.7
SG2	DC40-RD	50.9
SG3	DC40-RD	53.6
S	ED8kU-90DD-RD	572.4
SAG1	DC40-RD	31.3
SAG2	DC40-RD	27
SAM	DC40-RD	44.7
SBG1	DC40-RD	38
SBG2	DC40-RD	33.8
SBM	DC40-RD	38
SCG1	DC40-RD	41.1
SCG2	DC40-RD	37

Full Line lengths for CODEX - M

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	7799
AG2`	7750
AG3`	7720
AG4`	7750
AG5`	7693
AG6`	7644
AG7`	7591
AG8`	7611
AG9`	7530
AG10`	7457
AG11`	7311
AG12`	7306
AG13`	7209
AG14`	7213
SAG1`	6970
SAG2`	6929
SG1`	6895
AAG1`	7786
AAG2`	7736
AAG3`	7706
AAG4`	7738
AAG5`	7680
AAG6`	7631
AAG7`	7579
AAG8`	7603
SBG1`	6970
SBG2`	6929
SG2`	6907
BG1`	7746
BG2`	7695
BG3`	7677
BG4`	7712
BG5`	7651
BG6`	7593
BG7`	7550
BG8`	7559
BG9`	7448
BG10`	7383
BG11`	7273

BG12`	7281
BG13`	7203
BG14`	7232
SCG1`	7001
SCG2`	6962
SG3`	6935
CG1`	7911
CG2`	7874
CG3`	7855
CG4`	7880
CG5`	7817
CG6`	7773
CG7`	7722
CG8`	7727
FG1`	7950
FG2`	7708
FG3`	7567
FG4`	7605
FG5`	7604
FG6`	7407
FG7`	7177
FG8`	7178
FG9`	6988
FG10`	6960
FG11`	6898
FG12`	6980

Line lengths for CODEX - L

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL275M-RD	555.8
A2	PPSL275M-RD	558
A3	PPSL275M-RD	481.3
AM1	ED8kU-190DD-RD	161.7
AM2	ED8kU-190DD-RD	157.3
AM3	ED8kU-190DD-RD	150.9
AM4	ED8kU-190DD-RD	144.7
AM5	ED8kU-190DD-RD	127.1
AM6	ED8kU-130DD-RD	108.4
AM7	ED8kU-90DD-RD	194
AMM1	ED8kU-230DD-RD	93.5
AG1	ED8kU-50DD-RD	45.5
AG10	DC40-RD	26.8
AG11	DC40-RD	30
AG12	DC40-RD	29.4
AG13	DC40-RD	25.8
AG14	DC40-RD	26.1
AG2	ED8kU-50DD-RD	40.2
AG3	ED8kU-50DD-RD	41.4
AG4	ED8kU-50DD-RD	44.3
AG5	ED8kU-50DD-RD	43.3
AG6	ED8kU-50DD-RD	37.9
AG7	ED8kU-50DD-RD	38.7
AG8	ED8kU-50DD-RD	40.6
AG9	DC40-RD	34.5
AAG1	ED8kU-50DD-RD	43.9
AAG2	ED8kU-50DD-RD	38.6
AAG3	ED8kU-50DD-RD	39.8
AAG4	ED8kU-50DD-RD	43
AAG5	ED8kU-50DD-RD	41.7
AAG6	ED8kU-50DD-RD	36.4
AAG7	ED8kU-50DD-RD	37.3
AAG8	ED8kU-50DD-RD	39.5
B1	ED8kU-190DD-RD	553.6
B2	ED8kU-190DD-RD	552.8
B3	ED8kU-190DD-RD	463.6
BM1	ED8kU-90DD-RD	146
BM2	ED8kU-90DD-RD	145.7
BM3	ED8kU-90DD-RD	137.3

BM4	ED8kU-90DD-RD	137
BM5	ED8kU-50DD-RD	124
BM6	ED8kU-90DD-RD	110.8
BM7	ED8kU-50DD-RD	199.7
BMM5	ED8kU-90DD-RD	91.9
BG1	DC40-RD	57.1
BG10	DC40-RD	27.3
BG11	DC40-RD	29.2
BG12	DC40-RD	29.9
BG13	DC40-RD	24
BG14	DC40-RD	27
BG2	DC40-RD	51.7
BG3	DC40-RD	50.2
BG4	DC40-RD	53.8
BG5	DC40-RD	57
BG6	DC40-RD	50.9
BG7	DC40-RD	46.7
BG8	DC40-RD	47.6
BG9	DC40-RD	34.2
CG1	DC40-RD	74.2
CG2	DC40-RD	70.3
CG3	DC40-RD	68.7
CG4	DC40-RD	71.1
CG5	DC40-RD	74.2
CG6	DC40-RD	69.6
CG7	DC40-RD	64.5
CG8	DC40-RD	64.9
F1	DSL70-OE	434.2
F2	DSL70-OE	293.7
FM1	ED8kU-50DD-RD	120
FM2	ED8kU-50DD-RD	99.1
FM3	ED8kU-50DD-RD	116.3
FM4	ED8kU-50DD-RD	82.2
FM5	ED8kU-50DD-RD	63.3
FM6	ED8kU-50DD-RD	56.6
FMM1	ED8kU-50DD-RD	121.4
FMM2	ED8kU-50DD-RD	124.6
FG1	DC40-RD	57.6
FG10	DC40-RD	28.2
FG11	DC40-RD	28.4
FG12	DC40-RD	36.5
FG2	DC40-RD	32.6
FG3	DC40-RD	39

FG4	DC40-RD	42.9
FG5	DC40-RD	45.7
FG6	DC40-RD	25.1
FG7	DC40-RD	35.2
FG8	DC40-RD	35.2
FG9	DC40-RD	31.3
F	ED7850-240O	221.4
SM1	DC40-RD	19.3
SG1	DC40-RD	51.5
SG2	DC40-RD	52.8
SG3	DC40-RD	55.6
S	ED8kU-90DD-RD	596.6
SAG1	DC40-RD	32.4
SAG2	DC40-RD	28
SAM	DC40-RD	46.4
SBG1	DC40-RD	39.4
SBG2	DC40-RD	35
SBM	DC40-RD	39.4
SCG1	DC40-RD	42.6
SCG2	DC40-RD	38.4

Full Line lengths for CODEX - L

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	8097
AG2`	8047
AG3`	8016
AG4`	8048
AG5`	7990
AG6`	7939
AG7`	7885
AG8`	7906
AG9`	7822
AG10`	7746
AG11`	7595
AG12`	7589
AG13`	7489
AG14`	7494
SAG1`	7240
SAG2`	7197
SG1`	7162
AAG1`	8083
AAG2`	8032
AAG3`	8001
AAG4`	8036
AAG5`	7976
AAG6`	7925
AAG7`	7872
AAG8`	7897
SBG1`	7240
SBG2`	7198
SG2`	7175
BG1`	8046
BG2`	7993
BG3`	7976
BG4`	8012
BG5`	7950
BG6`	7890
BG7`	7846
BG8`	7856
BG9`	7740
BG10`	7672
BG11`	7559

BG12`	7567
BG13`	7486
BG14`	7517
SCG1`	7273
SCG2`	7231
SG3`	7203
CG1`	8218
CG2`	8179
CG3`	8161
CG4`	8187
CG5`	8122
CG6`	8077
CG7`	8025
CG8`	8030
FG1`	8311
FG2`	8061
FG3`	7916
FG4`	7956
FG5`	7958
FG6`	7752
FG7`	7513
FG8`	7514
FG9`	7317
FG10`	7286
FG11`	7222
FG12`	7304