


Table of contents

Line plan for CODEX
Line lengths for CODEX - XXS
Full Line lengths for CODEX - XXS
Line lengths for CODEX - XS
Full Line lengths for CODEX - XS
Line lengths for CODEX - S
Full Line lengths for CODEX - S
Line lengths for CODEX - M
Full Line lengths for CODEX - M
Line lengths for CODEX - L
Full Line lengths for CODEX - L

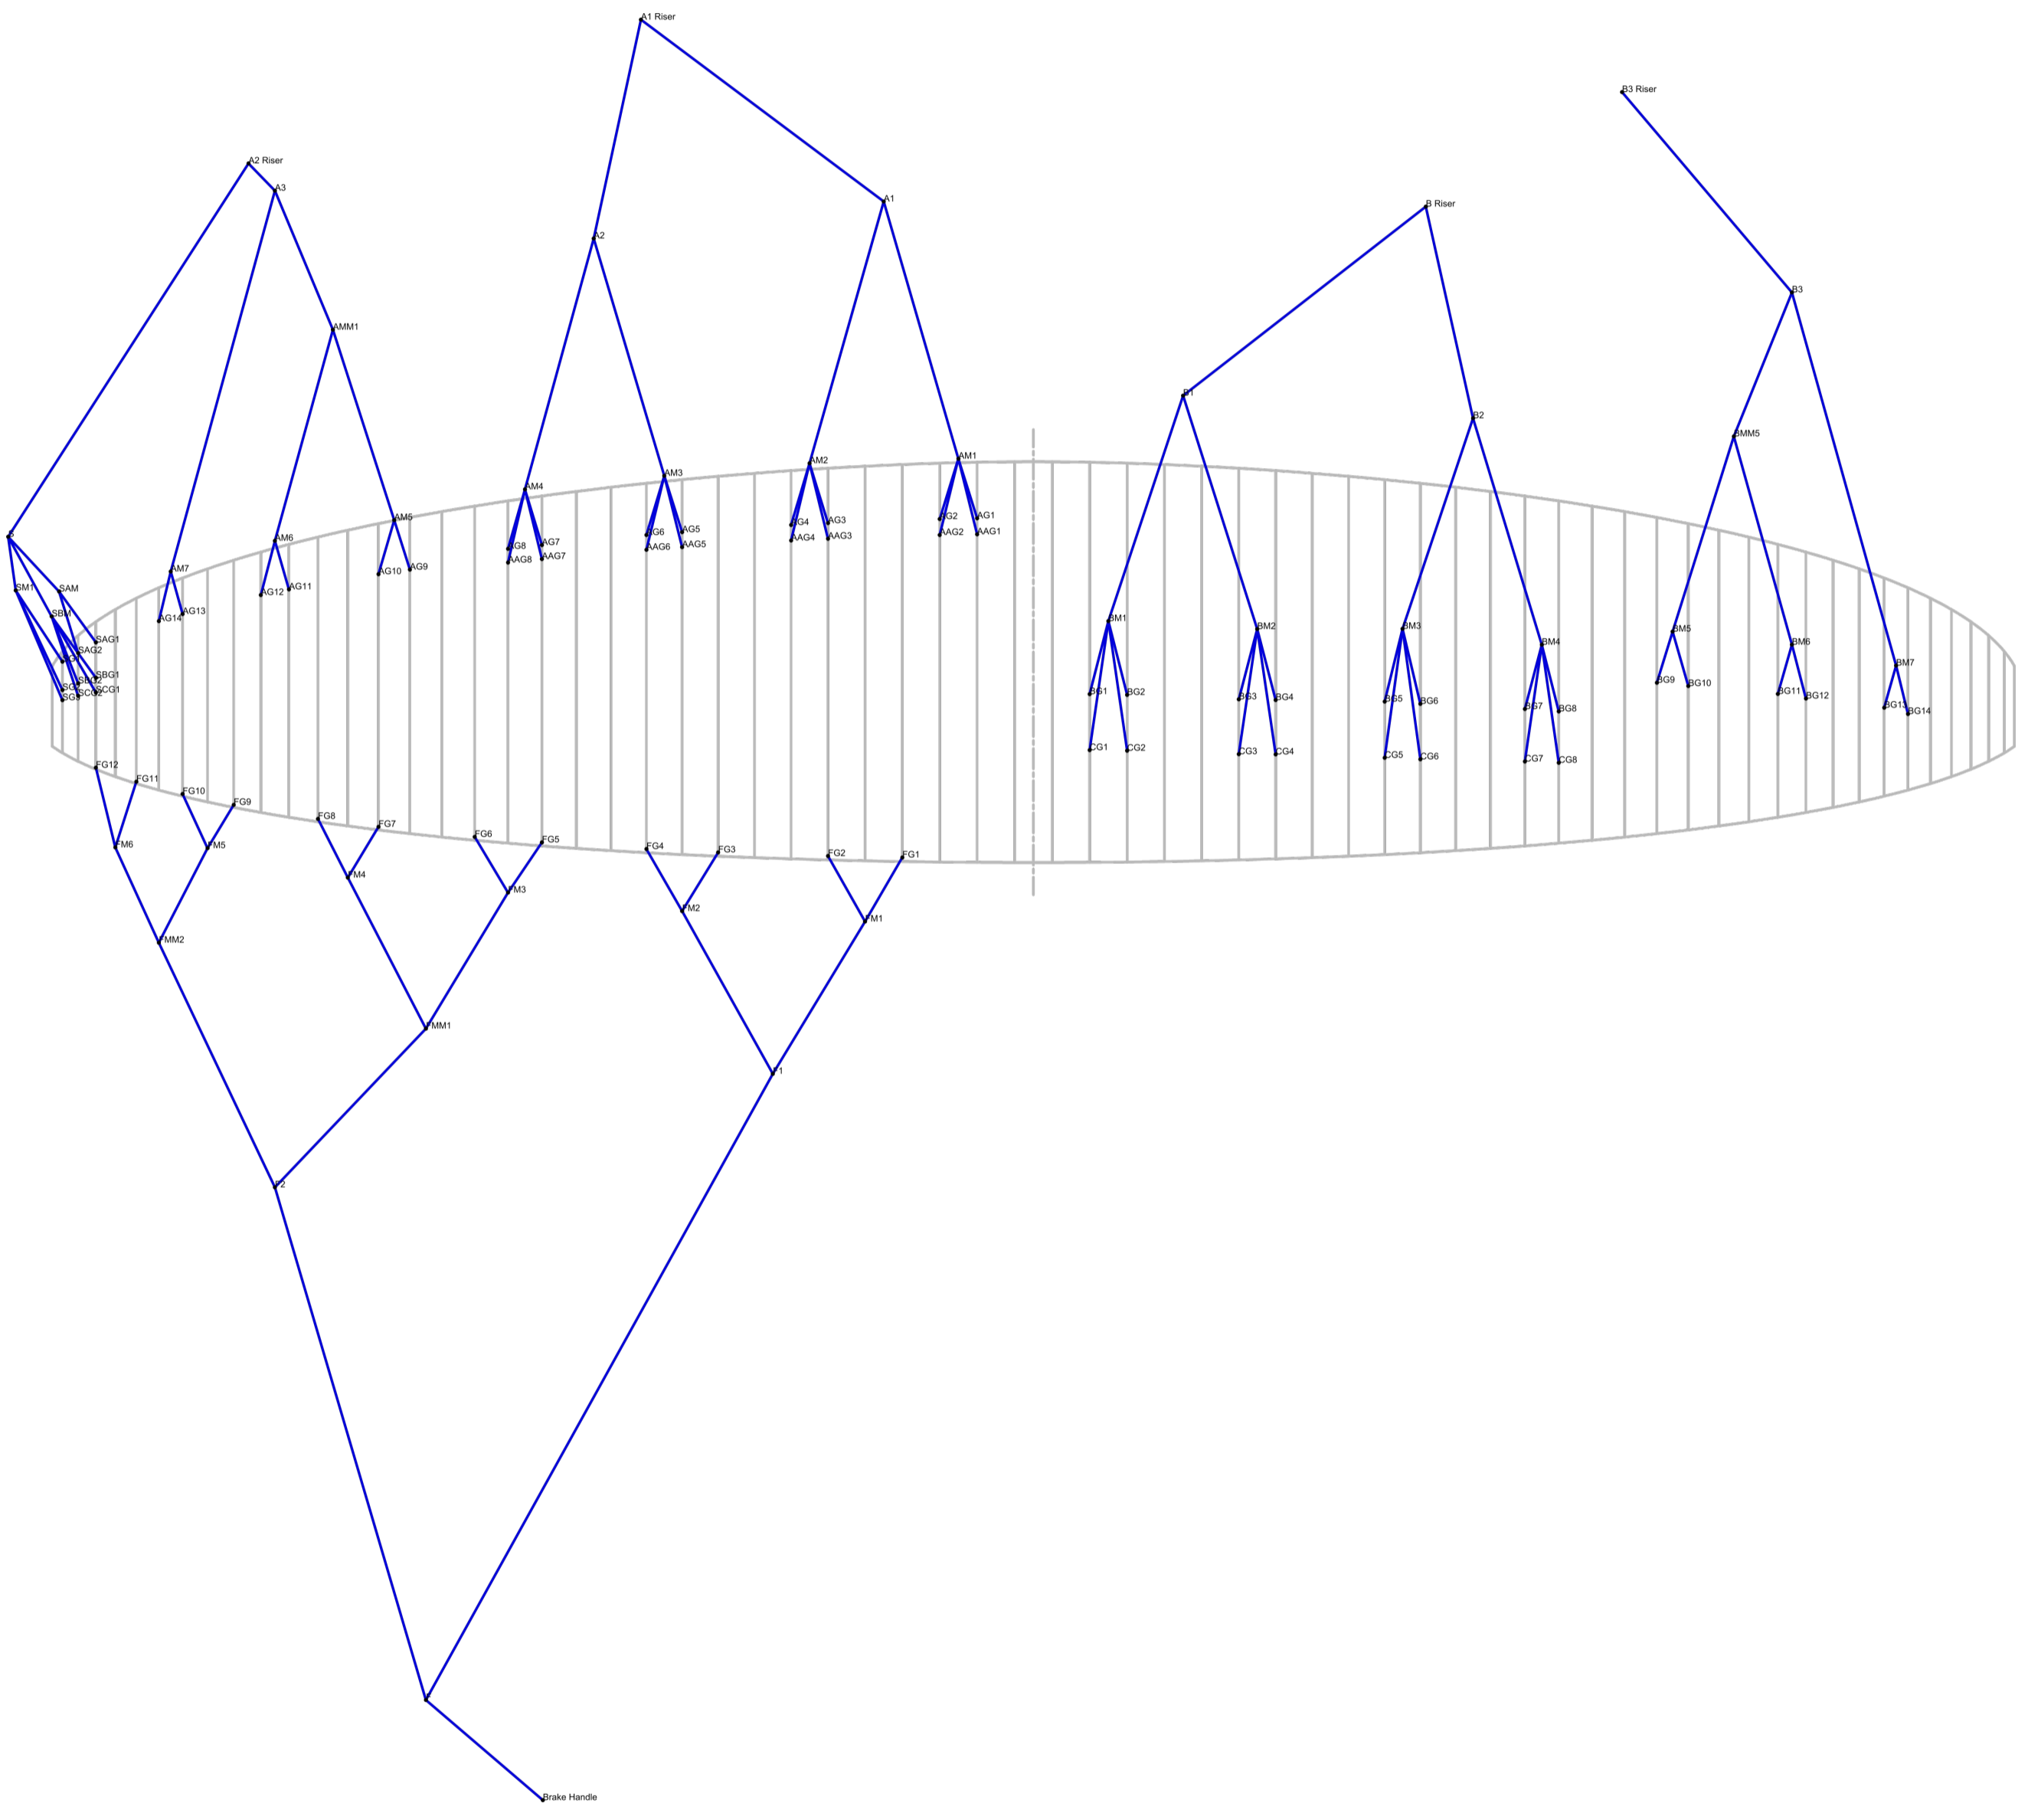

Line lengths for CODEX - XXS

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL200M-RD	460.4
A2	PPSL200M-RD	461.3
A3	PPSL200M-RD	395.8
AM1	ED8kU-130DD-RD	136.8
AM2	ED8kU-130DD-RD	132.5
AM3	ED8kU-130DD-RD	127.6
AM4	ED8kU-130DD-RD	122
AM5	ED8kU-90DD-RD	107.3
AM6	ED8kU-90DD-RD	91.6
AM7	ED8kU-90DD-RD	163.9
AMM1	ED8kU-190DD-RD	79.1
AG1	ED8kU-50DD-RD	38.6
AG10	DC40-RD	22.6
AG11	DC40-RD	25.4
AG12	DC40-RD	24.8
AG13	DC40-RD	21.9
AG14	DC40-RD	22.1
AG2	ED8kU-50DD-RD	33.9
AG3	ED8kU-50DD-RD	35.2
AG4	ED8kU-50DD-RD	37.5
AG5	ED8kU-50DD-RD	36.7
AG6	ED8kU-50DD-RD	32
AG7	ED8kU-50DD-RD	32.8
AG8	ED8kU-50DD-RD	34.3
AG9	DC40-RD	29.1
AAG1	ED8kU-50DD-RD	37.3
AAG2	ED8kU-50DD-RD	32.5
AAG3	ED8kU-50DD-RD	33.8
AAG4	ED8kU-50DD-RD	36.3
AAG5	ED8kU-50DD-RD	35.3
AAG6	ED8kU-50DD-RD	30.8
AAG7	ED8kU-50DD-RD	31.6
AAG8	ED8kU-50DD-RD	33.4
B1	ED8k1U-130D-BE	457.8
B2	ED8k1U-130D-BE	456.2
B3	ED8k1U-130D-BE	378.1
BM1	ED8kU-70DD-RD	123.7
BM2	ED8kU-70DD-RD	122.9
BM3	ED8kU-50DD-RD	116.1

BM4	ED8kU-50DD-RD	115.6
BM5	ED8kU-50DD-RD	104.9
BM6	ED8kU-50DD-RD	93.7
BM7	ED8kU-50DD-RD	168.9
BMM5	ED8kU-70DD-RD	77.8
BG1	DC40-RD	48.5
BG10	DC40-RD	23.1
BG11	DC40-RD	24.7
BG12	DC40-RD	25.3
BG13	DC40-RD	20.3
BG14	DC40-RD	22.9
BG2	DC40-RD	43.8
BG3	DC40-RD	42.5
BG4	DC40-RD	45.4
BG5	DC40-RD	48.3
BG6	DC40-RD	43
BG7	DC40-RD	39.5
BG8	DC40-RD	40.2
BG9	DC40-RD	29
CG1	DC40-RD	62.9
CG2	DC40-RD	59.4
CG3	DC40-RD	58.1
CG4	DC40-RD	60.1
CG5	DC40-RD	62.7
CG6	DC40-RD	58.8
CG7	DC40-RD	54.6
CG8	DC40-RD	54.9
F1	DSL70-OE	360.8
F2	DSL70-OE	243.1
FM1	ED8kU-50DD-RD	101.6
FM2	ED8kU-50DD-RD	83.1
FM3	ED8kU-50DD-RD	98.2
FM4	ED8kU-50DD-RD	69.8
FM5	ED8kU-50DD-RD	52.1
FM6	ED8kU-50DD-RD	48.3
FMM1	ED8kU-50DD-RD	99.8
FMM2	ED8kU-50DD-RD	104.7
FG1	DC40-RD	48.8
FG10	DC40-RD	24.2
FG11	DC40-RD	22.8
FG12	DC40-RD	30.7
FG2	DC40-RD	27.4
FG3	DC40-RD	33.1

FG4	DC40-RD	36.2
FG5	DC40-RD	38.6
FG6	DC40-RD	21.4
FG7	DC40-RD	29.7
FG8	DC40-RD	29.9
FG9	DC40-RD	26.2
F	ED7850-2400	182.5
SM1	DC40-RD	16.6
SG1	DC40-RD	43.5
SG2	DC40-RD	44.6
SG3	DC40-RD	47
S	ED8kU-50DD-RD	493.9
SAG1	DC40-RD	27.5
SAG2	DC40-RD	23.9
SAM	DC40-RD	39
SBG1	DC40-RD	33.3
SBG2	DC40-RD	29.7
SBM	DC40-RD	33.3
SCG1	DC40-RD	36
SCG2	DC40-RD	32.5

Full Line lengths for CODEX - XXS

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	6789.899965
AA1R`	6778.154462
A2R`	6745.81893
AA2R`	6733.346999
A3R`	6715.135054
AA3R`	6702.560857
A4R`	6740.28939
AA4R`	6730.208264
A5R`	6687.679772
AA5R`	6675.53686
A6R`	6643.544186
AA6R`	6632.280697
A7R`	6595.524045
AA7R`	6584.694756
A8R`	6612.763049
AA8R`	6605.176725
A9R`	6539.469367
A10R`	6474.941968
A11R`	6346.611985
A12R`	6341.872896
A13R`	6256.598846
A14R`	6259.927052
SA1R`	6051.393558
SA2R`	6016.072211
S1R`	5987.538902
B1R`	6739.785193
C1R`	6884.527816
B2R`	6693.84863
C2R`	6850.857525
B3R`	6674.308572
C3R`	6831.035001
B4R`	6703.911778
C4R`	6851.540089
B5R`	6647.265699
C5R`	6792.477187
B6R`	6595.806471
C6R`	6754.250862
B7R`	6556.408421
C7R`	6707.372813

B8R`	6564.385986
C8R`	6711.496094
B9R`	6462.420237
B10R`	6404.881312
B11R`	6308.655303
B12R`	6315.395641
B13R`	6246.60684
B14R`	6272.62741
SB1R`	6051.244326
SC1R`	6079.184588
SB2R`	6016.880392
SC2R`	6045.328264
S2R`	5999.238955
S3R`	6023.692082
F1R`	6874.199888
F2R`	6660.521735
F3R`	6533.79845
F4R`	6565.295915
F5R`	6553.647858
F6R`	6381.980091
F7R`	6182.528922
F8R`	6184.964363
F9R`	6018.924951
F10R`	5999.422712
F11R`	5949.351489
F12R`	6028.4754
`	0

Line lengths for CODEX - XS

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSLS200M-RD	485.1
A2	PPSLS200-RD	486.4
A3	PPSLS200-RD	418.5
AM1	ED8kU-130DD-RD	144.3
AM2	ED8kU-130DD-RD	140.1
AM3	ED8kU-130DD-RD	134.3
AM4	ED8kU-130DD-RD	128.5
AM5	ED8kU-90DD-RD	112.6
AM6	ED8kU-90DD-RD	96.1
AM7	ED8kU-50DD-RD	172.1
AMM1	ED8kU-190DD-RD	82.4
AG1	ED8kU-50DD-RD	40.2
AG10	DC40	23.6
AG11	DC40	26.6
AG12	DC40	26
AG13	DC40	22.9
AG14	DC40	23.1
AG2	ED8kU-50DD-RD	35.4
AG3	ED8kU-50DD-RD	36.6
AG4	ED8kU-50DD-RD	39.2
AG5	ED8kU-50DD-RD	38.2
AG6	ED8kU-50DD-RD	33.4
AG7	ED8kU-50DD-RD	34.1
AG8	ED8kU-50DD-RD	35.8
AG9	DC40	30.5
AAG1	ED8kU-50DD-RD	38.9
AAG2	ED8kU-50DD-RD	34.1
AAG3	ED8kU-50DD-RD	35.2
AAG4	ED8kU-50DD-RD	38.1
AAG5	ED8kU-50DD-RD	36.9
AAG6	ED8kU-50DD-RD	32.2
AAG7	ED8kU-50DD-RD	32.9
AAG8	ED8kU-50DD-RD	34.9
B1	ED8001-130D-BE	482.4
B2	ED8001-130D-BE	481.1
B3	ED8001-130D-BE	400.4
BM1	ED8kU-70DD-RD	130.7
BM2	ED8kU-70DD-RD	130.1
BM3	ED8kU-50DD-RD	122.8

BM4	ED8kU-50DD-RD	122.3
BM5	ED8kU-50DD-RD	110.3
BM6	ED8kU-50DD-RD	98.5
BM7	ED8kU-50DD-RD	177.5
BMM5	ED8kU-70DD-RD	81.5
BG1	DC40	51
BG10	DC40	24.3
BG11	DC40	25.9
BG12	DC40	26.5
BG13	DC40	21.3
BG14	DC40	23.9
BG2	DC40	46.1
BG3	DC40	44.8
BG4	DC40	47.8
BG5	DC40	50.9
BG6	DC40	45.3
BG7	DC40	41.6
BG8	DC40	42.3
BG9	DC40	30.5
CG1	DC40	66.2
CG2	DC40	62.5
CG3	DC40	61.2
CG4	DC40	63.2
CG5	DC40	66
CG6	DC40	61.8
CG7	DC40	57.4
CG8	DC40	57.6
F1	DSL70-OE	376.4
F2	DSL70-OE	254.2
FM1	ED8kU-50DD-RD	107.2
FM2	ED8kU-50DD-RD	87.9
FM3	ED8kU-50DD-RD	103.3
FM4	ED8kU-50DD-RD	74
FM5	ED8kU-50DD-RD	53.5
FM6	ED8kU-50DD-RD	51.1
FMM1	ED8kU-50DD-RD	103
FMM2	ED8kU-50DD-RD	110.2
FG1	DC40	51.7
FG10	DC40	25.5
FG11	DC40	22.8
FG12	DC40	31.7
FG2	DC40	29
FG3	DC40	35

FG4	DC40	38.3
FG5	DC40	40.7
FG6	DC40	22.6
FG7	DC40	31.2
FG8	DC40	31.5
FG9	DC40	27.2
F	ED7830-2400	194.7
SM1	DC40	20.5
SG1	DC40	42.9
SG2	DC40	44.2
SG3	DC40	46.6
S	ED8kU-50DD-RD	521.5
SAG1	DC40	29
SAG2	DC40	25.3
SAM	DC40	41.1
SBG1	DC40	34.7
SBG2	DC40	31
SBM	DC40	35.5
SCG1	DC40	37.4
SCG2	DC40	33.8

Full Line lengths for CODEX - XS

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	7138
AA1R`	7126
A2R`	7092
AA2R`	7079
A3R`	7061
AA3R`	7048
A4R`	7088
AA4R`	7078
A5R`	7033
AA5R`	7021
A6R`	6987
AA6R`	6975
A7R`	6936
AA7R`	6925
A8R`	6955
AA8R`	6947
A9R`	6882
A10R`	6814
A11R`	6678
A12R`	6673
A13R`	6581
A14R`	6585
SA1R`	6361
SA2R`	6325
S1R`	6296
B1R`	7086
C1R`	7238
B2R`	7038
C2R`	7203
B3R`	7019
C3R`	7183
B4R`	7050
C4R`	7205
B5R`	6991
C5R`	7144
B6R`	6937
C6R`	7103
B7R`	6895
C7R`	7053

B8R`	6904
C8R`	7057
B9R`	6800
B10R`	6739
B11R`	6636
B12R`	6643
B13R`	6568
B14R`	6595
SB1R`	6361
SC1R`	6388
SB2R`	6326
SC2R`	6354
S2R`	6309
S3R`	6334
F1R`	7287
F2R`	7061
F3R`	6927
F4R`	6961
F5R`	6942
F6R`	6762
F7R`	6554
F8R`	6558
F9R`	6383
F10R`	6367
F11R`	6316
F12R`	6405
`	0

Line lengths for CODEX - S

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSLS200M-RD	514.7
A2	PPSLS200-RD	516.4
A3	PPSLS200-RD	444.4
AM1	ED8kU-130DD-RD	151.8
AM2	ED8kU-130DD-RD	147.6
AM3	ED8kU-130DD-RD	141.3
AM4	ED8kU-130DD-RD	135.4
AM5	ED8kU-90DD-RD	118.5
AM6	ED8kU-90DD-RD	101.2
AM7	ED8kU-50DD-RD	181.3
AMM1	ED8kU-190DD-RD	86.7
AG1	ED8kU-50DD-RD	42.3
AG10	DC40	24.9
AG11	DC40	28
AG12	DC40	27.4
AG13	DC40	24.1
AG14	DC40	24.3
AG2	ED8kU-50DD-RD	37.3
AG3	ED8kU-50DD-RD	38.5
AG4	ED8kU-50DD-RD	41.2
AG5	ED8kU-50DD-RD	40.2
AG6	ED8kU-50DD-RD	35.2
AG7	ED8kU-50DD-RD	35.9
AG8	ED8kU-50DD-RD	37.7
AG9	DC40	32.1
AAG1	ED8kU-50DD-RD	40.9
AAG2	ED8kU-50DD-RD	35.9
AAG3	ED8kU-50DD-RD	37
AAG4	ED8kU-50DD-RD	40.1
AAG5	ED8kU-50DD-RD	38.8
AAG6	ED8kU-50DD-RD	33.9
AAG7	ED8kU-50DD-RD	34.6
AAG8	ED8kU-50DD-RD	36.8
B1	ED8001-130D-BE	511.8
B2	ED8001-130D-BE	510.8
B3	ED8001-130D-BE	426.5
BM1	ED8kU-70DD-RD	137.5
BM2	ED8kU-70DD-RD	137.1
BM3	ED8kU-50DD-RD	129.2

BM4	ED8kU-50DD-RD	128.8
BM5	ED8kU-50DD-RD	116.2
BM6	ED8kU-50DD-RD	103.7
BM7	ED8kU-50DD-RD	186.8
BMM5	ED8kU-70DD-RD	85.8
BG1	DC40	53.7
BG10	DC40	25.6
BG11	DC40	27.3
BG12	DC40	27.9
BG13	DC40	22.4
BG14	DC40	25.2
BG2	DC40	48.5
BG3	DC40	47.1
BG4	DC40	50.4
BG5	DC40	53.5
BG6	DC40	47.7
BG7	DC40	43.8
BG8	DC40	44.5
BG9	DC40	32.1
CG1	DC40	69.6
CG2	DC40	65.8
CG3	DC40	64.4
CG4	DC40	66.6
CG5	DC40	69.5
CG6	DC40	65.1
CG7	DC40	60.4
CG8	DC40	60.7
F1	DSL70-OE	398.5
F2	DSL70-OE	269.4
FM1	ED8kU-50DD-RD	113
FM2	ED8kU-50DD-RD	92.9
FM3	ED8kU-50DD-RD	108.9
FM4	ED8kU-50DD-RD	77.8
FM5	ED8kU-50DD-RD	56.9
FM6	ED8kU-50DD-RD	53.4
FMM1	ED8kU-50DD-RD	109.5
FMM2	ED8kU-50DD-RD	116.4
FG1	DC40	54.4
FG10	DC40	26.8
FG11	DC40	24.9
FG12	DC40	33.8
FG2	DC40	30.6
FG3	DC40	36.8

FG4	DC40	40.3
FG5	DC40	42.9
FG6	DC40	23.8
FG7	DC40	32.8
FG8	DC40	33.1
FG9	DC40	28.8
F	ED7830-2400	209.4
SM1	DC40	21.6
SG1	DC40	45.2
SG2	DC40	46.5
SG3	DC40	49.1
S	ED8kU-50DD-RD	552.7
SAG1	DC40	30.5
SAG2	DC40	26.6
SAM	DC40	43.3
SBG1	DC40	36.5
SBG2	DC40	32.6
SBM	DC40	37.3
SCG1	DC40	39.3
SCG2	DC40	35.5

Full Line lengths for CODEX - S

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	7530
AA1R`	7517
A2R`	7482
AA2R`	7468
A3R`	7451
AA3R`	7437
A4R`	7480
AA4R`	7469
A5R`	7423
AA5R`	7410
A6R`	7375
AA6R`	7362
A7R`	7322
AA7R`	7310
A8R`	7342
AA8R`	7333
A9R`	7259
A10R`	7188
A11R`	7045
A12R`	7040
A13R`	6944
A14R`	6948
SA1R`	6710
SA2R`	6672
S1R`	6641
B1R`	7475
C1R`	7635
B2R`	7425
C2R`	7598
B3R`	7406
C3R`	7579
B4R`	7440
C4R`	7602
B5R`	7379
C5R`	7539
B6R`	7322
C6R`	7497
B7R`	7279
C7R`	7445

B8R`	7288
C8R`	7450
B9R`	7178
B10R`	7113
B11R`	7006
B12R`	7013
B13R`	6935
B14R`	6963
SB1R`	6710
SC1R`	6739
SB2R`	6673
SC2R`	6703
S2R`	6655
S3R`	6681
F1R`	7694
F2R`	7457
F3R`	7318
F4R`	7354
F5R`	7339
F6R`	7149
F7R`	6929
F8R`	6933
F9R`	6749
F10R`	6729
F11R`	6675
F12R`	6765
`	0

Line lengths for CODEX - M

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL275M-RD	533.4
A2	PPSL275M-RD	535.3
A3	PPSL275M-RD	461.2
AM1	ED8kU-190DD-RD	155.9
AM2	ED8kU-190DD-RD	151.6
AM3	ED8kU-190DD-RD	145.5
AM4	ED8kU-190DD-RD	139.5
AM5	ED8kU-190DD-RD	122.5
AM6	ED8kU-130DD-RD	104.5
AM7	ED8kU-90DD-RD	187
AMM1	ED8kU-230DD-RD	90.2
AG1	ED8kU-50DD-RD	43.9
AG10	DC40-RD	25.9
AG11	DC40-RD	28.9
AG12	DC40-RD	28.4
AG13	DC40-RD	24.9
AG14	DC40-RD	25.2
AG2	ED8kU-50DD-RD	38.7
AG3	ED8kU-50DD-RD	40
AG4	ED8kU-50DD-RD	42.7
AG5	ED8kU-50DD-RD	41.8
AG6	ED8kU-50DD-RD	36.5
AG7	ED8kU-50DD-RD	37.3
AG8	ED8kU-50DD-RD	39.1
AG9	DC40-RD	33.3
AAG1	ED8kU-50DD-RD	42.4
AAG2	ED8kU-50DD-RD	37.2
AAG3	ED8kU-50DD-RD	38.4
AAG4	ED8kU-50DD-RD	41.5
AAG5	ED8kU-50DD-RD	40.2
AAG6	ED8kU-50DD-RD	35.1
AAG7	ED8kU-50DD-RD	36
AAG8	ED8kU-50DD-RD	38.1
B1	ED8k1U-190D-BE	530.8
B2	ED8k1U-190D-BE	529.8
B3	ED8k1U-190D-BE	443.4
BM1	ED8kU-90DD-RD	140.8
BM2	ED8kU-90DD-RD	140.4
BM3	ED8kU-90DD-RD	132.4

BM4	ED8kU-90DD-RD	132.1
BM5	ED8kU-50DD-RD	119.5
BM6	ED8kU-90DD-RD	106.8
BM7	ED8kU-50DD-RD	192.5
BMM5	ED8kU-90DD-RD	88.6
BG1	DC40-RD	55.1
BG10	DC40-RD	26.3
BG11	DC40-RD	28.1
BG12	DC40-RD	28.8
BG13	DC40-RD	23.1
BG14	DC40-RD	26
BG2	DC40-RD	49.9
BG3	DC40-RD	48.4
BG4	DC40-RD	51.8
BG5	DC40-RD	55
BG6	DC40-RD	49.1
BG7	DC40-RD	45
BG8	DC40-RD	45.9
BG9	DC40-RD	33
CG1	DC40-RD	71.6
CG2	DC40-RD	67.7
CG3	DC40-RD	66.2
CG4	DC40-RD	68.6
CG5	DC40-RD	71.5
CG6	DC40-RD	67.1
CG7	DC40-RD	62.2
CG8	DC40-RD	62.6
F1	DSL70-OE	416.9
F2	DSL70-OE	281.9
FM1	ED8kU-50DD-RD	115.6
FM2	ED8kU-50DD-RD	95.2
FM3	ED8kU-50DD-RD	112
FM4	ED8kU-50DD-RD	79.3
FM5	ED8kU-50DD-RD	60.5
FM6	ED8kU-50DD-RD	54.8
FMM1	ED8kU-50DD-RD	116.2
FMM2	ED8kU-50DD-RD	119.9
FG1	DC40-RD	55.6
FG10	DC40-RD	27.2
FG11	DC40-RD	26.8
FG12	DC40-RD	34.8
FG2	DC40-RD	31.4
FG3	DC40-RD	37.6

FG4	DC40-RD	41.3
FG5	DC40-RD	44
FG6	DC40-RD	24.2
FG7	DC40-RD	33.9
FG8	DC40-RD	34
FG9	DC40-RD	30.1
F	ED7850-2400	206.4
SM1	DC40-RD	18.7
SG1	DC40-RD	49.7
SG2	DC40-RD	50.9
SG3	DC40-RD	53.6
S	ED8kU-90DD-RD	572.4
SAG1	DC40-RD	31.3
SAG2	DC40-RD	27
SAM	DC40-RD	44.7
SBG1	DC40-RD	38
SBG2	DC40-RD	33.8
SBM	DC40-RD	38
SCG1	DC40-RD	41.1
SCG2	DC40-RD	37

Full Line lengths for CODEX - M

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	7759
AG2`	7710
AG3`	7680
AG4`	7710
AG5`	7653
AG6`	7604
AG7`	7551
AG8`	7571
AG9`	7490
AG10`	7417
AG11`	7271
AG12`	7266
AG13`	7169
AG14`	7173
SAG1`	6930
SAG2`	6889
SG1`	6855
AAG1`	7746
AAG2`	7696
AAG3`	7666
AAG4`	7698
AAG5`	7640
AAG6`	7591
AAG7`	7539
AAG8`	7563
SBG1`	6930
SBG2`	6889
SG2`	6867
BG1`	7706
BG2`	7655
BG3`	7637
BG4`	7672
BG5`	7611
BG6`	7553
BG7`	7510
BG8`	7519
BG9`	7408
BG10`	7343
BG11`	7233

BG12`	7241
BG13`	7163
BG14`	7192
SCG1`	6961
SCG2`	6922
SG3`	6895
CG1`	7871
CG2`	7834
CG3`	7815
CG4`	7840
CG5`	7777
CG6`	7733
CG7`	7682
CG8`	7687
FG1`	7910
FG2`	7668
FG3`	7527
FG4`	7565
FG5`	7564
FG6`	7367
FG7`	7137
FG8`	7138
FG9`	6948
FG10`	6920
FG11`	6858
FG12`	6940
`	0

Line lengths for CODEX - L

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL275M-RD	555.8
A2	PPSL275M-RD	558
A3	PPSL275M-RD	481.3
AM1	ED8kU-190DD-RD	161.7
AM2	ED8kU-190DD-RD	157.3
AM3	ED8kU-190DD-RD	150.9
AM4	ED8kU-190DD-RD	144.7
AM5	ED8kU-190DD-RD	127.1
AM6	ED8kU-130DD-RD	108.4
AM7	ED8kU-90DD-RD	194
AMM1	ED8kU-230DD-RD	93.5
AG1	ED8kU-50DD-RD	45.5
AG10	DC40-RD	26.8
AG11	DC40-RD	30
AG12	DC40-RD	29.4
AG13	DC40-RD	25.8
AG14	DC40-RD	26.1
AG2	ED8kU-50DD-RD	40.2
AG3	ED8kU-50DD-RD	41.4
AG4	ED8kU-50DD-RD	44.3
AG5	ED8kU-50DD-RD	43.3
AG6	ED8kU-50DD-RD	37.9
AG7	ED8kU-50DD-RD	38.7
AG8	ED8kU-50DD-RD	40.6
AG9	DC40-RD	34.5
AAG1	ED8kU-50DD-RD	43.9
AAG2	ED8kU-50DD-RD	38.6
AAG3	ED8kU-50DD-RD	39.8
AAG4	ED8kU-50DD-RD	43
AAG5	ED8kU-50DD-RD	41.7
AAG6	ED8kU-50DD-RD	36.4
AAG7	ED8kU-50DD-RD	37.3
AAG8	ED8kU-50DD-RD	39.5
B1	ED8kU-190DD-RD	553.6
B2	ED8kU-190DD-RD	552.8
B3	ED8kU-190DD-RD	463.6
BM1	ED8kU-90DD-RD	146
BM2	ED8kU-90DD-RD	145.7
BM3	ED8kU-90DD-RD	137.3

BM4	ED8kU-90DD-RD	137
BM5	ED8kU-50DD-RD	124
BM6	ED8kU-90DD-RD	110.8
BM7	ED8kU-50DD-RD	199.7
BMM5	ED8kU-90DD-RD	91.9
BG1	DC40-RD	57.1
BG10	DC40-RD	27.3
BG11	DC40-RD	29.2
BG12	DC40-RD	29.9
BG13	DC40-RD	24
BG14	DC40-RD	27
BG2	DC40-RD	51.7
BG3	DC40-RD	50.2
BG4	DC40-RD	53.8
BG5	DC40-RD	57
BG6	DC40-RD	50.9
BG7	DC40-RD	46.7
BG8	DC40-RD	47.6
BG9	DC40-RD	34.2
CG1	DC40-RD	74.2
CG2	DC40-RD	70.3
CG3	DC40-RD	68.7
CG4	DC40-RD	71.1
CG5	DC40-RD	74.2
CG6	DC40-RD	69.6
CG7	DC40-RD	64.5
CG8	DC40-RD	64.9
F1	DSL70-OE	434.2
F2	DSL70-OE	293.7
FM1	ED8kU-50DD-RD	120
FM2	ED8kU-50DD-RD	99.1
FM3	ED8kU-50DD-RD	116.3
FM4	ED8kU-50DD-RD	82.2
FM5	ED8kU-50DD-RD	63.3
FM6	ED8kU-50DD-RD	56.6
FMM1	ED8kU-50DD-RD	121.4
FMM2	ED8kU-50DD-RD	124.6
FG1	DC40-RD	57.6
FG10	DC40-RD	28.2
FG11	DC40-RD	28.4
FG12	DC40-RD	36.5
FG2	DC40-RD	32.6
FG3	DC40-RD	39

FG4	DC40-RD	42.9
FG5	DC40-RD	45.7
FG6	DC40-RD	25.1
FG7	DC40-RD	35.2
FG8	DC40-RD	35.2
FG9	DC40-RD	31.3
F	ED7850-2400	221.4
SM1	DC40-RD	19.3
SG1	DC40-RD	51.5
SG2	DC40-RD	52.8
SG3	DC40-RD	55.6
S	ED8kU-90DD-RD	596.6
SAG1	DC40-RD	32.4
SAG2	DC40-RD	28
SAM	DC40-RD	46.4
SBG1	DC40-RD	39.4
SBG2	DC40-RD	35
SBM	DC40-RD	39.4
SCG1	DC40-RD	42.6
SCG2	DC40-RD	38.4

Full Line lengths for CODEX - L

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
AG1`	8057
AG2`	8007
AG3`	7976
AG4`	8008
AG5`	7950
AG6`	7899
AG7`	7845
AG8`	7866
AG9`	7782
AG10`	7706
AG11`	7555
AG12`	7549
AG13`	7449
AG14`	7454
SAG1`	7200
SAG2`	7157
SG1`	7122
AAG1`	8043
AAG2`	7992
AAG3`	7961
AAG4`	7996
AAG5`	7936
AAG6`	7885
AAG7`	7832
AAG8`	7857
SBG1`	7200
SBG2`	7158
SG2`	7135
BG1`	8006
BG2`	7953
BG3`	7936
BG4`	7972
BG5`	7910
BG6`	7850
BG7`	7806
BG8`	7816
BG9`	7700
BG10`	7632
BG11`	7519

BG12`	7527
BG13`	7446
BG14`	7477
SCG1`	7233
SCG2`	7191
SG3`	7163
CG1`	8178
CG2`	8139
CG3`	8121
CG4`	8147
CG5`	8082
CG6`	8037
CG7`	7985
CG8`	7990
FG1`	8271
FG2`	8021
FG3`	7876
FG4`	7916
FG5`	7918
FG6`	7712
FG7`	7473
FG8`	7474
FG9`	7277
FG10`	7246
FG11`	7182
FG12`	7264
`	0