NOVA ION 6 LIGHT

Table of contents

Line plan for ION 6 LIGHT

Line lengths for ION 6 LIGHT - XXS

Full Line lengths for ION 6 LIGHT - XXS

Line lengths for ION 6 LIGHT - XS

Full Line lengths for ION 6 LIGHT - XS

Line lengths for ION 6 LIGHT - S

Full Line lengths for ION 6 LIGHT - S

Line lengths for ION 6 LIGHT - M

Full Line lengths for ION 6 LIGHT - M

Line lengths for ION 6 LIGHT - L

Full Line lengths for ION 6 LIGHT - L

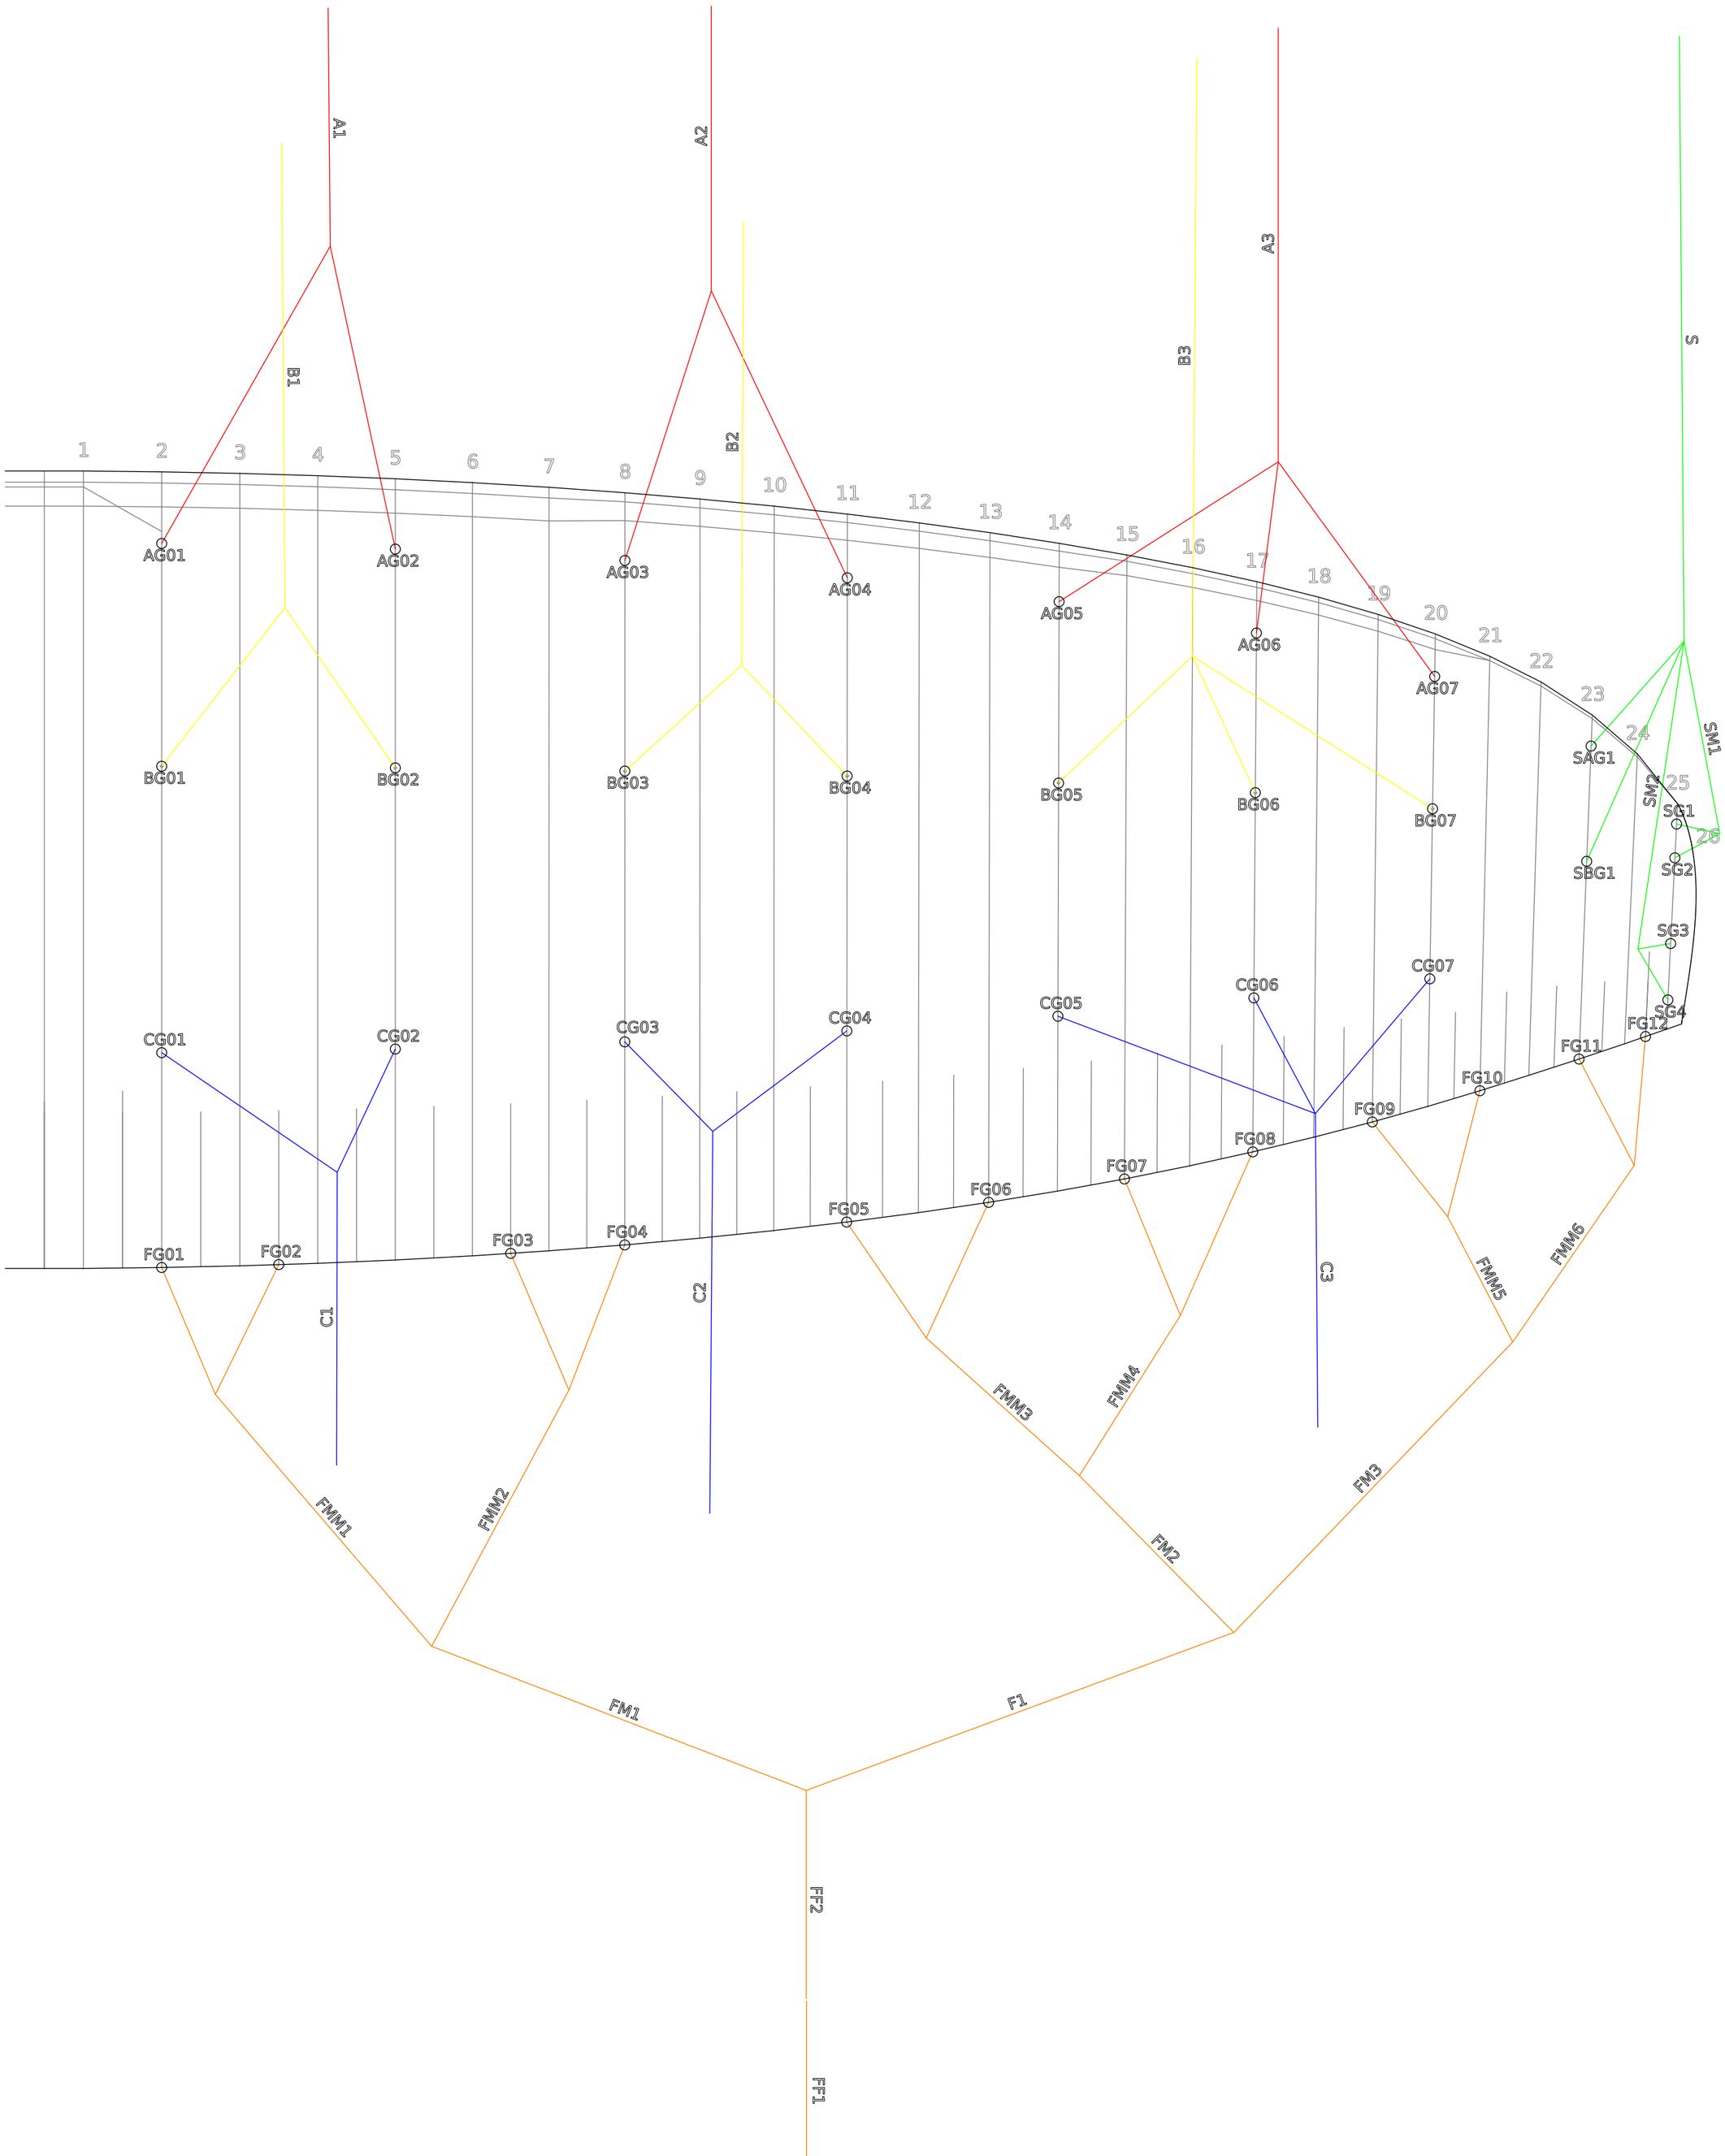
A1
A2
A3
S
B1
B2
B3
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
AG01
AG02
AG03
AG04
AG05
AG06
AG07
BG01
BG02
BG03
BG04
BG05
BG06
BG07
SAG1
SBG1
SM1
SM2
SG1
SG2
SG3
SG4
CG01
CG02
CG03
CG04
CG05
CG06
CG07
FG01
FG02
FG03
FG04
FG05
FG06
FG07
FG08
FG09
FG10
FG11
FG12
C1
C2
C3
FMM1
FMM2
FMM3
FMM4
FMM5
FMM6
FM1
FM2
FM3
F1
FF2
FF1

Line lengths for ION6 LIGHT - XXS

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	385.9
A2	PPSL191-RD	392.6
A3	PPSL191-RD	328.9
AG01	ED8kU-90DD-RD	193.1
AG02	ED8kU-90DD-RD	190.1
AG03	ED8kU-90DD-RD	181.9
AG04	ED8kU-90DD-RD	181.2
AG05	ED8kU-70DD-RD	243.4
AG06	ED8kU-70DD-RD	235.3
AG07	ED8kU-70DD-RD	231.4
B1	PPSL191-YW	380
B2	PPSL191-YW	387.6
B3	PPSL191-YW	327.3
BG01	ED8kU-90DD-RD	190.6
BG02	ED8kU-90DD-RD	188.1
BG03	ED8kU-90DD-RD	179.4
BG04	ED8kU-90DD-RD	179.4
BG05	ED8kU-70DD-RD	238.9
BG06	ED8kU-70DD-RD	231.9
BG07	ED8kU-70DD-RD	228.7
C1	TSL140-BE	388.4
C2	TSL140-BE	394.9
C3	TSL140-BE	329.9
CG01	ED8kU-90DD-RD	193.4
CG02	ED8kU-90DD-RD	190.6
CG03	ED8kU-90DD-RD	182.5
CG04	ED8kU-90DD-RD	181.3
CG05	ED8kU-70DD-RD	242.3
CG06	ED8kU-70DD-RD	233.5
CG07	ED8kU-70DD-RD	228.3
F1	Phoenix90-OE	204.7
FM1	Phoenix90-OE	243.8
FM2	PPSLS65-OE	69.1
FM3	PPSLS65-OE	119.6
FMM1	PPSLS65-OE	171
FMM2	PPSLS65-OE	161.5
FMM3	PPSLS65-OE	112.8
FMM4	PPSLS65-OE	103.8
FMM5	PPSLS65-OE	56.2

FMM6	PPSLS65-OE	78.7
FG01	PPSLS65-OE	74.2
FG02	PPSLS65-OE	54.1
FG03	PPSLS65-OE	51.9
FG04	PPSLS65-OE	54
FG05	PPSLS65-OE	63.7
FG06	PPSLS65-OE	54
FG07	PPSLS65-OE	52
FG08	PPSLS65-OE	54.5
FG09	PPSLS65-OE	51.2
FG10	PPSLS65-OE	44.2
FG11	PPSLS65-OE	25
FG12	PPSLS65-OE	32.1
FF1	ED7850-240O	120
FF2	PPSL160-OG	39
S1	TSL140-GN	427.5
SM1	DSL70-GN	63.7
SM2	DSL70-GN	73
SG01	DSL70-GN	29.8
SG02	DSL70-GN	29.9
SG03	DSL70-GN	27.4
SG04	DSL70-GN	38.9
SAG1	DSL70-GN	109.6
SBG1	DSL70-GN	106.9

Full Line lengths for ION6LIGHT - XXS

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	5758
A2R`	5730
A3R`	5713
A4R`	5708
A5R`	5690
A6R`	5610
A7R`	5573
A8R`	5337
B1R`	5674
B2R`	5651
B3R`	5638
B4R`	5640
B5R`	5629
B6R`	5560
B7R`	5530
B8R`	5311
C1R`	5786.0906806747
C2R`	5760.0906806747
C3R`	5742.0906806747
C4R`	5732.0906806747
C5R`	5689
C6R`	5602
C7R`	5552
F1R`	5955.2791000285
F2R`	5753.9712882504
F3R`	5636.6037802601
F4R`	5658.2267016867
F5R`	5568.3663716338
F6R`	5471.3663716338
F7R`	5361.1647327616
F8R`	5386.1647327616
F9R`	5381.5823663808
F10R`	5311.591936964
F11R`	5344.6730470555
F12R`	5415.6682617639
S4R`	5365
S3R`	5249
S2R`	5182
S1R`	5180

Line lengths for ION6 LIGHT - XS

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	408.9
A2	PPSL191-RD	416.2
A3	PPSL191-RD	349.3
AG01	ED8kU-90DD-RD	203.2
AG02	ED8kU-90DD-RD	200.3
AG03	ED8kU-90DD-RD	191.4
AG04	ED8kU-90DD-RD	190.8
AG05	ED8kU-70DD-RD	256.2
AG06	ED8kU-70DD-RD	247.7
AG07	ED8kU-70DD-RD	243.6
B1	PPSL191-YW	402.6
B2	PPSL191-YW	411
B3	PPSL191-YW	347.6
BG01	ED8kU-90DD-RD	200.5
BG02	ED8kU-90DD-RD	198.1
BG03	ED8kU-90DD-RD	188.8
BG04	ED8kU-90DD-RD	188.9
BG05	ED8kU-70DD-RD	251.5
BG06	ED8kU-70DD-RD	244
BG07	ED8kU-70DD-RD	240.8
C1	TSL140-BE	411.5
C2	TSL140-BE	418.7
C3	TSL140-BE	350.4
CG01	ED8kU-90DD-RD	203.4
CG02	ED8kU-90DD-RD	200.7
CG03	ED8kU-90DD-RD	192
CG04	ED8kU-90DD-RD	190.9
CG05	ED8kU-70DD-RD	255
CG06	ED8kU-70DD-RD	245.8
CG07	ED8kU-70DD-RD	240.3
F1	Phoenix90-OE	230.6
FM1	Phoenix90-OE	271.5
FM2	PPSLS65-OE	73.3
FM3	PPSLS65-OE	125.1
FMM1	PPSLS65-OE	179.4
FMM2	PPSLS65-OE	170.8
FMM3	PPSLS65-OE	119
FMM4	PPSLS65-OE	108.7
FMM5	PPSLS65-OE	59.3

FMM6	PPSLS65-OE	82.4
FG01	PPSLS65-OE	78.1
FG02	PPSLS65-OE	57.3
FG03	PPSLS65-OE	54.3
FG04	PPSLS65-OE	57
FG05	PPSLS65-OE	67.2
FG06	PPSLS65-OE	56.6
FG07	PPSLS65-OE	55
FG08	PPSLS65-OE	57.2
FG09	PPSLS65-OE	54.1
FG10	PPSLS65-OE	46.4
FG11	PPSLS65-OE	26.3
FG12	PPSLS65-OE	33.7
FF1	ED7850-240O	120
FF2	PPSL160-OG	31.5
S1	TSL140-GN	453.1
SM1	DSL70-GN	67
SM2	DSL70-GN	76.8
SG01	DSL70-GN	31.4
SG02	DSL70-GN	31.5
SG03	DSL70-GN	28.9
SG04	DSL70-GN	41
SAG1	DSL70-GN	115.4
SBG1	DSL70-GN	112.5

Full Line lengths for ION6 LIGHT - XS

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	6089
A2R`	6062
A3R`	6044
A4R`	6040
A5R`	6022
A6R`	5938
A7R`	5899
A8R`	5651
B1R`	5999
B2R`	5977
B3R`	5966
B4R`	5969
B5R`	5958
B6R`	5884
B7R`	5854
B8R`	5623
C1R`	6117.0692517849
C2R`	6092.0692517849
C3R`	6075.0692517849
C4R`	6066.0692517849
C5R`	6021
C6R`	5930
C7R`	5877
F1R`	6229.9240962405
F2R`	6022.1362862449
F3R`	5905.8819934795
F4R`	5932.6731294623
F5R`	5841.3847651356
F6R`	5735.3847651356
F7R`	5616.4675914324
F8R`	5638.4675914324
F9R`	5631.2337957162
F10R`	5554.1883669679
F11R`	5584.3030475011
F12R`	5658.3257618753
S4R`	5680
S3R`	5558
S2R`	5487
S1R`	5485

Line lengths for ION6LIGHT - S

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	431.6
A2	PPSL191-RD	439.6
A3	PPSL191-RD	369.6
AG01	ED8kU-90DD-RD	213.1
AG02	ED8kU-90DD-RD	210.3
AG03	ED8kU-90DD-RD	200.9
AG04	ED8kU-90DD-RD	200.3
AG05	ED8kU-70DD-RD	268.9
AG06	ED8kU-70DD-RD	260
AG07	ED8kU-70DD-RD	255.7
B1	PPSL191-YW	425.1
B2	PPSL191-YW	434.2
B3	PPSL191-YW	367.8
BG01	ED8kU-90DD-RD	210.4
BG02	ED8kU-90DD-RD	208
BG03	ED8kU-90DD-RD	198.1
BG04	ED8kU-90DD-RD	198.3
BG05	ED8kU-70DD-RD	263.9
BG06	ED8kU-70DD-RD	256.2
BG07	ED8kU-70DD-RD	252.7
C1	TSL140-BE	434.4
C2	TSL140-BE	442.2
C3	TSL140-BE	370.6
CG01	ED8kU-90DD-RD	213.4
CG02	ED8kU-90DD-RD	210.8
CG03	ED8kU-90DD-RD	201.5
CG04	ED8kU-90DD-RD	200.5
CG05	ED8kU-70DD-RD	267.7
CG06	ED8kU-70DD-RD	258
CG07	ED8kU-70DD-RD	252.3
F1	Phoenix90-OE	254.2
FM1	Phoenix90-OE	297.2
FM2	PPSLS65-OE	77.7
FM3	PPSLS65-OE	130.7
FMM1	PPSLS65-OE	187.8
FMM2	PPSLS65-OE	179.9
FMM3	PPSLS65-OE	125.3
FMM4	PPSLS65-OE	113.8
FMM5	PPSLS65-OE	62.8

FMM6	PPSLS65-OE	86.4
FG01	PPSLS65-OE	81.9
FG02	PPSLS65-OE	60.4
FG03	PPSLS65-OE	56.7
FG04	PPSLS65-OE	59.9
FG05	PPSLS65-OE	70.6
FG06	PPSLS65-OE	59.2
FG07	PPSLS65-OE	57.9
FG08	PPSLS65-OE	60
FG09	PPSLS65-OE	56.9
FG10	PPSLS65-OE	48.5
FG11	PPSLS65-OE	27.9
FG12	PPSLS65-OE	35.3
FF1	ED7850-240O	120
FF2	PPSL160-OG	29.5
S1	TSL140-GN	478.5
SM1	DSL70-GN	70.3
SM2	DSL70-GN	80.3
SG01	DSL70-GN	32.9
SG02	DSL70-GN	32.9
SG03	DSL70-GN	30.5
SG04	DSL70-GN	43.2
SAG1	DSL70-GN	121.1
SBG1	DSL70-GN	118

Full Line lengths for ION6LIGHT - S

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	6415
A2R`	6389
A3R`	6373
A4R`	6369
A5R`	6352
A6R`	6264
A7R`	6223
A8R`	5962
B1R`	6323
B2R`	6301
B3R`	6291
B4R`	6295
B5R`	6284
B6R`	6208
B7R`	6175
B8R`	5932
C1R`	6446
C2R`	6422
C3R`	6405
C4R`	6397
C5R`	6350
C6R`	6254
C7R`	6199
F1R`	6589
F2R`	6374
F3R`	6258
F4R`	6290
F5R`	6197.5
F6R`	6083.5
F7R`	5956
F8R`	5977
F9R`	5966
F10R`	5882
F11R`	5912
F12R`	5986
S4R`	5991
S3R`	5863
S2R`	5788
S1R`	5787

Line lengths for ION6 LIGHT - M

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-RD	452.7
A2	PPSL191-RD	461.4
A3	PPSL191-RD	388.4
AG01	ED8kU-90DD-RD	222.4
AG02	ED8kU-90DD-RD	219.6
AG03	ED8kU-90DD-RD	209.6
AG04	ED8kU-90DD-RD	209.1
AG05	ED8kU-70DD-RD	280.6
AG06	ED8kU-70DD-RD	271.4
AG07	ED8kU-70DD-RD	267
B1	PPSL191-YW	445.9
B2	PPSL191-YW	455.7
B3	PPSL191-YW	386.5
BG01	ED8kU-90DD-RD	219.5
BG02	ED8kU-90DD-RD	217.2
BG03	ED8kU-90DD-RD	206.8
BG04	ED8kU-90DD-RD	207
BG05	ED8kU-70DD-RD	275.5
BG06	ED8kU-70DD-RD	267.4
BG07	ED8kU-70DD-RD	263.8
C1	TSL140-BE	455.7
C2	TSL140-BE	464.1
C3	TSL140-BE	389.5
CG01	ED8kU-90DD-RD	222.7
CG02	ED8kU-90DD-RD	220.1
CG03	ED8kU-90DD-RD	210.2
CG04	ED8kU-90DD-RD	209.3
CG05	ED8kU-70DD-RD	279.4
CG06	ED8kU-70DD-RD	269.3
CG07	ED8kU-70DD-RD	263.3
F1	Phoenix90-OE	265.5
FM1	Phoenix90-OE	309.7
FM2	PPSLS65-OE	80.7
FM3	PPSLS65-OE	136.7
FMM1	PPSLS65-OE	196
FMM2	PPSLS65-OE	187.9
FMM3	PPSLS65-OE	130.7
FMM4	PPSLS65-OE	118.9
FMM5	PPSLS65-OE	65.1

FMM6	PPSLS65-OE	90.1
FG01	PPSLS65-OE	85.6
FG02	PPSLS65-OE	63.1
FG03	PPSLS65-OE	59.2
FG04	PPSLS65-OE	62.6
FG05	PPSLS65-OE	73.7
FG06	PPSLS65-OE	61.8
FG07	PPSLS65-OE	60.4
FG08	PPSLS65-OE	62.6
FG09	PPSLS65-OE	59.3
FG10	PPSLS65-OE	50.7
FG11	PPSLS65-OE	29
FG12	PPSLS65-OE	36.9
FF1	ED7850-240O	120
FF2	PPSL160-OG	37.7
S1	TSL140-GN	502
SM1	DSL70-GN	73.4
SM2	DSL70-GN	84
SG01	DSL70-GN	34.3
SG02	DSL70-GN	34.4
SG03	DSL70-GN	31.7
SG04	DSL70-GN	45
SAG1	DSL70-GN	126.4
SBG1	DSL70-GN	123.2

Full Line lengths for ION6 LIGHT - M

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	6719
A2R`	6693
A3R`	6678
A4R`	6675
A5R`	6657
A6R`	6566
A7R`	6524
A8R`	6250
B1R`	6622
B2R`	6601
B3R`	6593
B4R`	6597
B5R`	6587
B6R`	6507
B7R`	6473
B8R`	6219
C1R`	6751.8893187147
C2R`	6727.8893187147
C3R`	6710.8893187147
C4R`	6703.8893187147
C5R`	6656
C6R`	6556
C7R`	6498
F1R`	6914.5828927047
F2R`	6689.6027079025
F3R`	6569.9792176942
F4R`	6604.2232967867
F5R`	6507.6991296028
F6R`	6388.6991296028
F7R`	6256.7312701695
F8R`	6278.7312701695
F9R`	6267.8656350848
F10R`	6181.9980657839
F11R`	6214.7549537994
F12R`	6293.6887384499
S4R`	6281
S3R`	6147
S2R`	6069
S1R`	6067

Line lengths for ION6 LIGHT - L

See also: docs.nova.eu for a searchable online database

Position	Material	Length (cm)
A1	PPSL160-RD	473.3
A2	PPSL160-RD	482.6
A3	PPSL160-RD	406.8
AG01	ED8kU-130DD-RD	231.4
AG02	ED8kU-130DD-RD	228.7
AG03	ED8kU-130DD-RD	218.1
AG04	ED8kU-130DD-RD	217.7
AG05	ED8kU-90DD-RD	292.1
AG06	ED8kU-90DD-RD	282.5
AG07	ED8kU-90DD-RD	277.9
B1	PPSL160-YW	466.3
B2	PPSL160-YW	476.7
B3	PPSL160-YW	404.7
BG01	ED8kU-130DD-RD	228.5
BG02	ED8kU-130DD-RD	226.2
BG03	ED8kU-130DD-RD	215.2
BG04	ED8kU-130DD-RD	215.5
BG05	ED8kU-90DD-RD	286.7
BG06	ED8kU-90DD-RD	278.3
BG07	ED8kU-90DD-RD	274.6
C1	TSL140-BE	476.4
C2	TSL140-BE	485.4
C3	TSL140-BE	407.8
CG01	ED8kU-130DD-RD	231.8
CG02	ED8kU-130DD-RD	229.2
CG03	ED8kU-130DD-RD	218.8
CG04	ED8kU-130DD-RD	217.9
CG05	ED8kU-90DD-RD	290.8
CG06	ED8kU-90DD-RD	280.3
CG07	ED8kU-90DD-RD	274.2
F1	Phoenix90-OE	276.6
FM1	Phoenix90-OE	322.2
FM2	PPSLS65-OE	83.9
FM3	PPSLS65-OE	142.4
FMM1	PPSLS65-OE	203.9
FMM2	PPSLS65-OE	195.7
FMM3	PPSLS65-OE	136
FMM4	PPSLS65-OE	123.9
FMM5	PPSLS65-OE	67.8

FMM6	PPSLS65-OE	93.8
FG01	PPSLS65-OE	89.1
FG02	PPSLS65-OE	65.7
FG03	PPSLS65-OE	61.6
FG04	PPSLS65-OE	65.1
FG05	PPSLS65-OE	76.7
FG06	PPSLS65-OE	64.4
FG07	PPSLS65-OE	62.8
FG08	PPSLS65-OE	65.2
FG09	PPSLS65-OE	61.7
FG10	PPSLS65-OE	52.8
FG11	PPSLS65-OE	30.2
FG12	PPSLS65-OE	38.4
FF1	ED7850-240O	120
FF2	PPSL160-OG	46.2
S1	TSL140-GN	525
SM1	DSL70-GN	76.4
SM2	DSL70-GN	87.4
SG01	DSL70-GN	35.7
SG02	DSL70-GN	35.8
SG03	DSL70-GN	33.1
SG04	DSL70-GN	46.9
SAG1	DSL70-GN	131.6
SBG1	DSL70-GN	128.2

Full Line lengths for ION6LIGHT - L

See also: docs.nova.eu for a searchable online database

Position	Length (mm)
A1R`	7015
A2R`	6990
A3R`	6975
A4R`	6973
A5R`	6956
A6R`	6861
A7R`	6817
A8R`	6532
B1R`	6916
B2R`	6895
B3R`	6887
B4R`	6892
B5R`	6881
B6R`	6798
B7R`	6763
B8R`	6499
C1R`	7049.7422922602
C2R`	7025.7422922602
C3R`	7009.7422922602
C4R`	7002.7422922602
C5R`	6953
C6R`	6849
C7R`	6790
F1R`	7238.7332778962
F2R`	7004.9764412392
F3R`	6881.8366790716
F4R`	6917.3557306505
F5R`	6818.9718581731
F6R`	6695.9718581731
F7R`	6558.6369971511
F8R`	6582.6369971511
F9R`	6571.8184985756
F10R`	6483.1596848292
F11R`	6516.5607908357
F12R`	6599.3901977089
S4R`	6564
S3R`	6425
S2R`	6343
S1R`	6341