

## **Table of contents**

Line plan for MENTOR 7

Line lengths for MENTOR 7 - XS


Full Line lengths for MENTOR 7 - XS

Line lengths for MENTOR 7 - S

Full Line lengths for MENTOR 7 - S

Line lengths for MENTOR 7 - M

Full Line lengths for MENTOR 7 - M

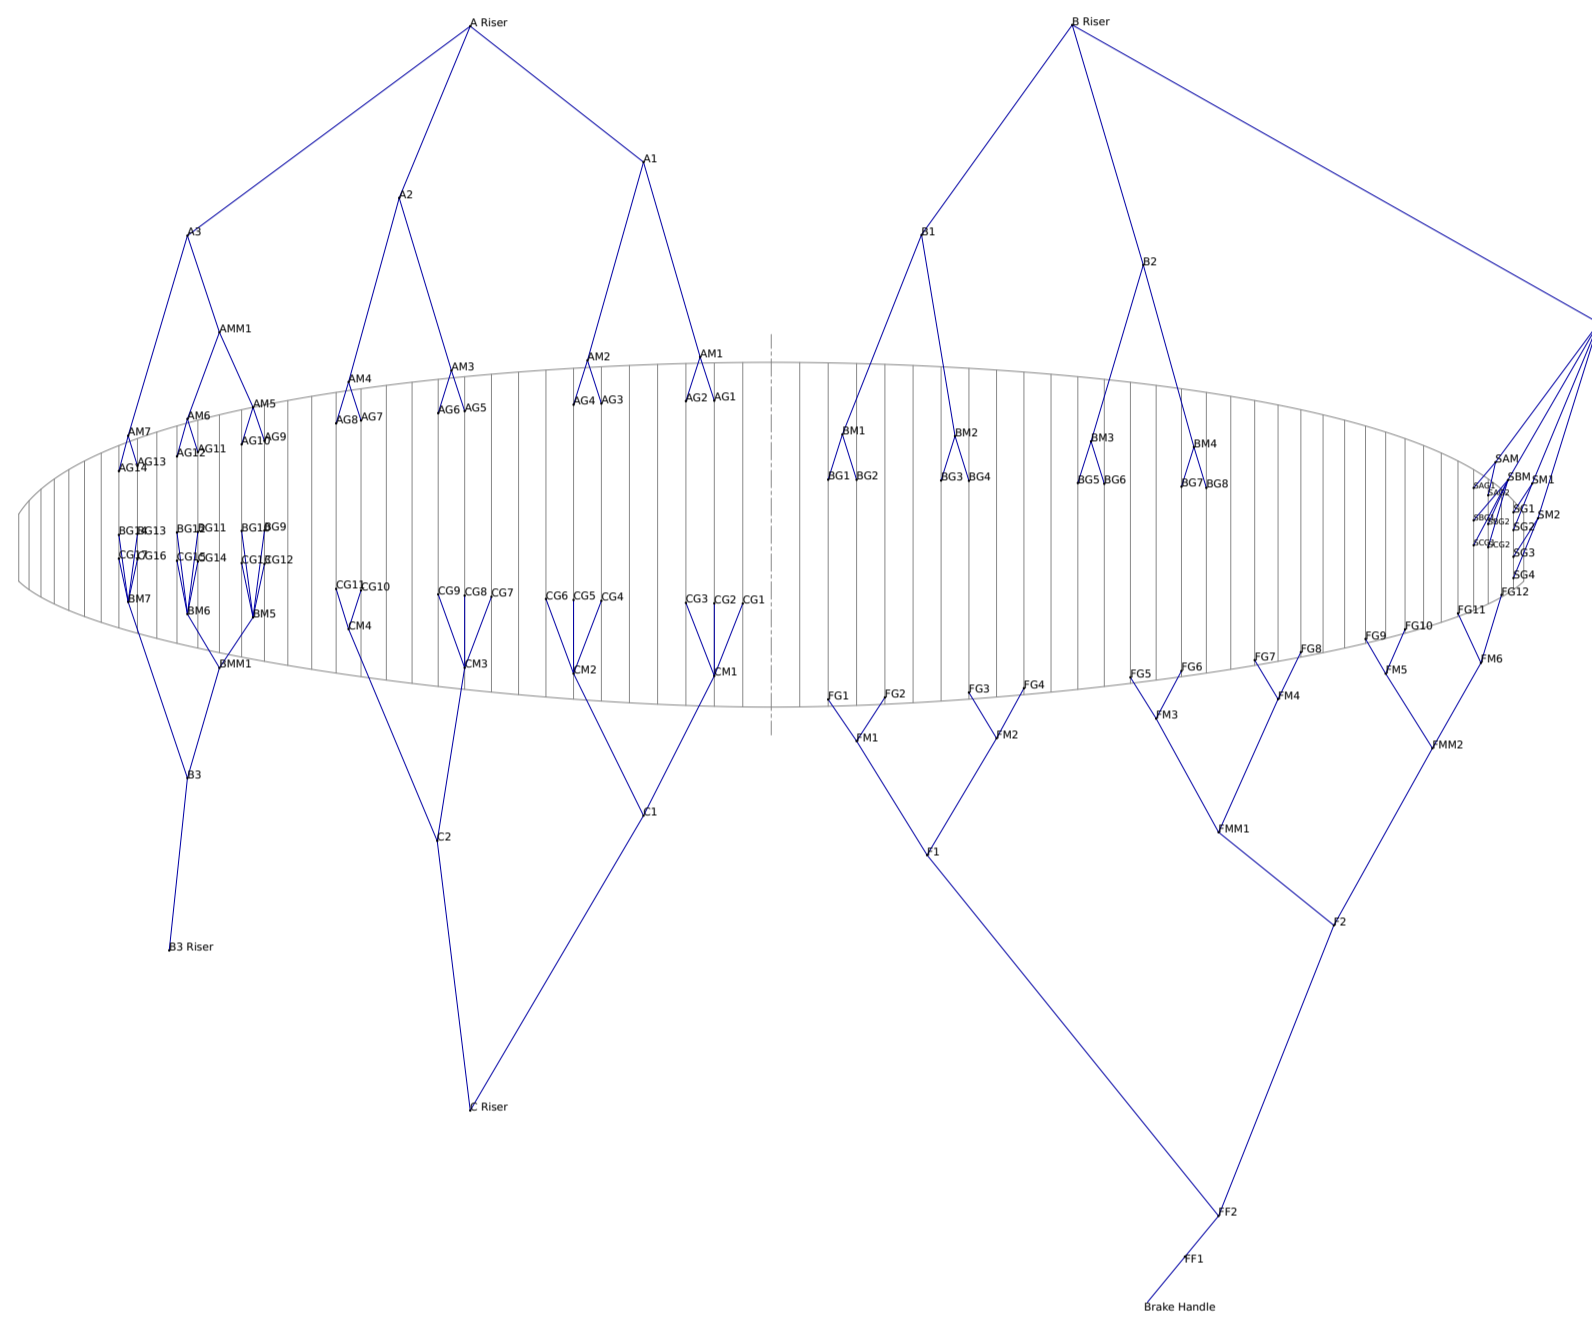

# Line lengths for MENTOR7 - XS

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Material	Length (cm)
A1	PPSL191M-RD	465.5
A2	PPSL191M-RD	475
A3	PPSL191-RD	456.9
AM1	ED8kU-90DD-RD	137.7
AM2	ED8kU-90DD-RD	134.6
AM3	ED8kU-90DD-RD	122.9
AM4	ED8kU-90DD-RD	119.7
AM5	ED8kU-50DD-RD	58.6
AM6	ED8kU-50DD-RD	48.6
AM7	ED8kU-50DD-RD	116.6
AMM1	ED8kU-130DD-RD	70.7
AG1	ED8kU-50DD-RD	32.2
AG10	DC40	20.1
AG11	DC40	21.4
AG12	DC40	22.7
AG13	DC40	20.3
AG14	DC40	21.6
AG2	ED8kU-50DD-RD	28.3
AG3	ED8kU-50DD-RD	28.7
AG4	ED8kU-50DD-RD	30.9
AG5	ED8kU-50DD-RD	29.8
AG6	ED8kU-50DD-RD	26.4
AG7	ED8kU-50DD-RD	25.4
AG8	ED8kU-50DD-RD	27.8
AG9	DC40	26.3
B1	PPSL191-YW	291.3
B2	PPSL191-YW	459.3
B3	PPSL191-YW	442.4
BM1	ED8kU-90DD-RD	290.4
BM2	ED8kU-90DD-RD	287.4
BM3	ED8kU-90DD-RD	120.2
BM4	ED8kU-90DD-RD	117.9
BM5	ED8kU-50DD-RD	38.3
BM6	ED8kU-50DD-RD	31.9
BM7	ED8kU-50DD-RD	110.5
BMM1	ED8kU-90DD-RD	76.2
BG1	ED8kU-50DD-RD	31.2
BG10	ED8kU-50DD-RD	41.1
BG11	DC40	40.7

BG12	DC40	41.4
BG13	DC40	33.9
BG14	DC40	34.1
BG2	ED8kU-50DD-RD	29.5
BG3	ED8kU-50DD-RD	29.4
BG4	ED8kU-50DD-RD	29.9
BG5	ED8kU-50DD-RD	29.5
BG6	ED8kU-50DD-RD	25.9
BG7	ED8kU-50DD-RD	25
BG8	ED8kU-50DD-RD	27.5
BG9	ED8kU-50DD-RD	47.5
C1	A8001 U130DD_BE	486.2
C2	A8001 U130DD_BE	303.2
CM1	ED8kU-70DD-RD	103.4
CM2	ED8kU-70DD-RD	95.6
CM3	ED8kU-70DD-RD	272.5
CM4	ED8kU-70DD-RD	288.2
CG1	ED8kU-50DD-RD	58.8
CG10	ED8kU-50DD-RD	26.1
CG11	ED8kU-50DD-RD	27
CG12	ED8kU-50DD-RD	51.8
CG13	ED8kU-50DD-RD	45.2
CG14	DC40	45.5
CG15	DC40	45.3
CG16	DC40	36.7
CG17	DC40	36.7
CG2	ED8kU-50DD-RD	48.2
CG3	ED8kU-50DD-RD	44.8
CG4	ED8kU-50DD-RD	48.4
CG5	ED8kU-50DD-RD	48.5
CG6	ED8kU-50DD-RD	55.7
CG7	ED8kU-50DD-RD	52.5
CG8	ED8kU-50DD-RD	47.1
CG9	ED8kU-50DD-RD	48.5
DG1	ED8kU-50DD-RD	65.9
DG2	ED8kU-50DD-RD	62.5
F1	ED8kU-70DD-RD	315.8
F2	ED8kU-70DD-RD	165.5
FM1	ED8kU-50DD-RD	98
FM2	ED8kU-50DD-RD	58.4
FM3	ED8kU-50DD-RD	89.7
FM4	ED8kU-50DD-RD	69.1
FM5	ED8kU-50DD-RD	50.6

FM6	ED8kU-50DD-RD	51.1
FMM1	ED8kU-50DD-RD	127.8
FMM2	ED8kU-50DD-RD	136.5
FG1	DC40	81.8
FG10	DC40	24.3
FG11	DC40	23.1
FG12	DC40	42.1
FG2	DC40	52.2
FG3	DC40	63
FG4	DC40	47.5
FG5	DC40	38.5
FG6	DC40	27
FG7	DC40	27.2
FG8	DC40	32.7
FG9	DC40	25.5
FF1	ED7850-2400	120
FF2	ED8kU-130DD-RD	127.7
SM1	DC40	99.5
SM2	DC40	101.3
SG1	DC40	21.5
SG2	DC40	24
SG3	DC40	26.7
SG4	DC40	33.1
S	DSL70-GN	434.1
SAG1	DC40	18.6
SAG2	DC40	17.1
SAM	DC40	109.6
SBG1	DC40	31.4
SBG2	DC40	28.4
SBM	DC40	96.9
SCG1	DC40	37.6
SCG2	DC40	35.4

# Full Line lengths for MENTOR7 - XS

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

<b>Position</b>	<b>Length (mm)</b>
A1`	6841
A2`	6802
A3`	6776
A4`	6799
A5`	6763
A6`	6730
A7`	6689
A8`	6714
A9`	6610
A10`	6549
A11`	6463
A12`	6476
A13`	6427
A14`	6440
A15`	6208
A16`	6194
B1`	6715
B2`	6700
B3`	6669
B4`	6674
B5`	6678
B6`	6642
B7`	6610
B8`	6636
B9`	6529
B10`	6466
B11`	6398
B12`	6407
B13`	6355
B14`	6359
B15`	6208
B16`	6180
C1`	6972
C2`	6867
C3`	6834
C4`	6790
C5`	6792
C6`	6865
C7`	6770

C8`	6716
C9`	6732
C10`	6664
C11`	6674
C12`	6573
C13`	6508
C14`	6447
C15`	6446
C16`	6384
C17`	6385
C18`	6271
C19`	6251
F1`	7429
F2`	7134
F3`	6845
F4`	6691
F5`	6688
F6`	6573
F7`	6370
F8`	6426
F9`	6254
F10`	6243
F11`	6235
F12`	6427
S4`	6274
S3`	6209
S2`	6163
S1`	6138
`	0

# Line lengths for MENTOR7 - S

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-M_RED	483.1
A2	PPSL191-M_RED	486.4
A3	PPSL191-RD	461.1
AM1	ED8kU-90DD-RED	144.3
AM2	ED8kU-90DD-RED	140.3
AM3	ED8kU-90DD-RED	129.4
AM4	ED8kU-70DD	123.7
AM5	ED8kU-70DD	61.7
AM6	ED8kU-50DD-RED	49.8
AM7	ED8kU-50DD-RED	120.7
AMM1	ED8kU-130DD-RED	75.8
AG1	ED8kU-70DD	33.6
AG10	ED8kU-50DD-RED	20.6
AG11	DC40-RED	23.1
AG12	DC40-RED	24.6
AG13	DC40-RED	20.9
AG14	DC40-RED	22.6
AG2	ED8kU-50DD-RED	29.5
AG3	ED8kU-50DD-RED	30.1
AG4	ED8kU-50DD-RED	32.2
AG5	ED8kU-70DD	31.2
AG6	ED8kU-50DD-RED	27.2
AG7	ED8kU-50DD-RED	26.9
AG8	ED8kU-50DD-RED	28.9
AG9	ED8kU-50DD-RED	27.4
B1	PPSL191-YW	299.1
B2	PPSL191-YW	470.4
B3	PPSL191-YW	447.3
BM1	ED8kU-90DD-RED	303.8
BM2	ED8kU-90DD-RED	300.9
BM3	ED8kU-90DD-RED	126.3
BM4	ED8kU-90DD-RED	122.4
BM5	ED8kU-70DD	40.3
BM6	ED8kU-50DD-RED	32.6
BM7	ED8kU-50DD-RED	114.5
BMM1	ED8kU-90DD-RED	81
BG1	ED8kU-50DD-RED	32.4
BG10	DC40-RED	42.7
BG11	DC40-RED	43.1



BG12	DC40-RED	44.2
BG13	DC40-RED	34.8
BG14	DC40-RED	35.6
BG2	ED8kU-50DD-RED	30.9
BG3	ED8kU-50DD-RED	30.7
BG4	ED8kU-50DD-RED	31.2
BG5	ED8kU-50DD-RED	30.8
BG6	ED8kU-50DD-RED	26.8
BG7	ED8kU-50DD-RED	26.3
BG8	ED8kU-50DD-RED	28.6
BG9	DC40-RED	49.6
C1	ED8001-130D-BE	503.7
C2	ED8001-130D-BE	307.2
CM1	ED8kU-70DD	108.5
CM2	ED8kU-70DD	99.8
CM3	ED8kU-70DD	285.7
CM4	ED8kU-70DD	300
CG1	ED8kU-50DD-RED	61.4
CG10	ED8kU-50DD-RED	27.5
CG11	ED8kU-50DD-RED	28.1
CG12	DC40-RED	54.1
CG13	DC40-RED	47
CG14	DC40-RED	47.7
CG15	DC40-RED	47.9
CG16	DC40-RED	38.3
CG17	DC40-RED	38.4
CG2	ED8kU-50DD-RED	50.5
CG3	ED8kU-50DD-RED	47.1
CG4	ED8kU-50DD-RED	50.8
CG5	ED8kU-50DD-RED	50.8
CG6	ED8kU-50DD-RED	58.2
CG7	ED8kU-50DD-RED	55.1
CG8	ED8kU-50DD-RED	49.1
CG9	ED8kU-50DD-RED	50.4
F1	ED8kU-70DD	335.1
F2	ED8kU-70DD	170.8
FM1	ED8kU-50DD-RED	103
FM2	ED8kU-50DD-RED	61
FM3	ED8kU-50DD-RED	93
FM4	ED8kU-50DD-RED	70.7
FM5	ED8kU-50DD-RED	53.5
FM6	ED8kU-50DD-RED	54.7
FMM1	ED8kU-50DD-RED	135.2

FMM2	ED8kU-50DD-RED	140
FG1	DC40-RED	85.2
FG10	DC40-RED	25.3
FG11	DC40-RED	24
FG12	DC40-RED	44.3
FG2	DC40-RED	54.3
FG3	DC40-RED	65.8
FG4	DC40-RED	49.4
FG5	DC40-RED	40.5
FG6	DC40-RED	27.7
FG7	DC40-RED	28.8
FG8	DC40-RED	33.9
FG9	DC40-RED	26.8
FF1	ED7850-2400	120
FF2	ED8kU-130DD-RED	125.2
SM1	ED8kU-50DD-RED	104.2
SM2	ED8kU-50DD-RED	106.5
SG1	DC40-RED	22.3
SG2	DC40-RED	25.1
SG3	DC40-RED	27.7
SG4	DC40-RED	34.6
S	DSL70-GRN	439.5
SAG1	DC40-RED	19.4
SAG2	DC40-RED	17.9
SAM	ED8kU-50DD-RED	114.3
SBG1	DC40-RED	32.6
SBG2	DC40-RED	29.6
SBM	ED8kU-50DD-RED	101.3
SCG1	DC40-RED	39.3
SCG2	DC40-RED	37.1

# Full Line lengths for MENTOR7 - S

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

<b>Position</b>	<b>Length (mm)</b>
A1`	7117
A2`	7076
A3`	7042
A4`	7063
A5`	6976
A6`	6936
A7`	6877
A8`	6897
A9`	6764
A10`	6695
A11`	6602
A12`	6617
A13`	6543
A14`	6560
A15`	6349
A16`	6334
B1`	6965
B2`	6950
B3`	6918
B4`	6923
B5`	6887
B6`	6848
B7`	6803
B8`	6826
B9`	6688
B10`	6618
B11`	6545
B12`	6556
B13`	6482
B14`	6490
B15`	6350
B16`	6320
C1`	7248
C2`	7139
C3`	7105
C4`	7055
C5`	7055
C6`	7130
C7`	6991

C8`	6932
C9`	6944
C10`	6858
C11`	6864
C12`	6733
C13`	6661
C14`	6591
C15`	6593
C16`	6517
C17`	6518
C18`	6417
C19`	6396
F1`	7683
F2`	7373
F3`	7069
F4`	6905
F5`	6840
F6`	6712
F7`	6501
F8`	6551
F9`	6356
F10`	6341
F11`	6340
F12`	6543
S4`	6423
S3`	6353
S2`	6304
S1`	6276
`	0

# Line lengths for MENTOR7 - M

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Material	Length (cm)
A1	PPSL191M-RD	516.5
A2	PPSL191M-RD	524.3
A3	PPSL191-RD	504.2
AM1	ED8kU-90DD-RD	150.5
AM2	ED8kU-90DD-RD	147.6
AM3	ED8kU-90DD-RD	134.4
AM4	ED8kU-90DD-RD	131.2
AM5	ED8kU-50DD-RD	64.1
AM6	ED8kU-50DD-RD	53.2
AM7	ED8kU-50DD-RD	127.7
AMM1	ED8kU-130DD-RD	77.4
AG1	ED8kU-50DD-RD	35.2
AG10	DC40	22
AG11	DC40	24
AG12	DC40	25.8
AG13	DC40	21.7
AG14	DC40	23.7
AG2	ED8kU-50DD-RD	31
AG3	ED8kU-50DD-RD	31.3
AG4	ED8kU-50DD-RD	33.8
AG5	ED8kU-50DD-RD	32.6
AG6	ED8kU-50DD-RD	28.9
AG7	ED8kU-50DD-RD	27.8
AG8	ED8kU-50DD-RD	30.5
AG9	DC40	28.8
B1	PPSL191-YW	326.6
B2	PPSL191-YW	508.1
B3	PPSL191-YW	488.5
BM1	ED8kU-90DD-RD	317.7
BM2	ED8kU-90DD-RD	314.9
BM3	ED8kU-90DD-RD	131.5
BM4	ED8kU-90DD-RD	129.2
BM5	ED8kU-50DD-RD	41.9
BM6	ED8kU-50DD-RD	34.9
BM7	ED8kU-50DD-RD	121
BMM1	ED8kU-90DD-RD	83.4
BG1	ED8kU-50DD-RD	34
BG10	ED8kU-50DD-RD	45
BG11	DC40	45.1

BG12	DC40	46.4
BG13	DC40	36.5
BG14	DC40	37.4
BG2	ED8kU-50DD-RD	32.3
BG3	ED8kU-50DD-RD	32.1
BG4	ED8kU-50DD-RD	32.8
BG5	ED8kU-50DD-RD	32.3
BG6	ED8kU-50DD-RD	28.4
BG7	ED8kU-50DD-RD	27.3
BG8	ED8kU-50DD-RD	30.1
BG9	ED8kU-50DD-RD	52
C1	A8001 U130DD_BE	539.7
C2	A8001 U130DD_BE	336.7
CM1	ED8kU-70DD-RD	113
CM2	ED8kU-70DD-RD	105
CM3	ED8kU-70DD-RD	298.2
CM4	ED8kU-70DD-RD	315.6
CG1	ED8kU-50DD-RD	64.3
CG10	ED8kU-50DD-RD	28.5
CG11	ED8kU-50DD-RD	29.6
CG12	ED8kU-50DD-RD	56.7
CG13	ED8kU-50DD-RD	49.5
CG14	DC40	49.8
CG15	DC40	50.2
CG16	DC40	40.1
CG17	DC40	40.2
CG2	ED8kU-50DD-RD	52.8
CG3	ED8kU-50DD-RD	49.2
CG4	ED8kU-50DD-RD	52.8
CG5	ED8kU-50DD-RD	53.1
CG6	ED8kU-50DD-RD	61
CG7	ED8kU-50DD-RD	57.4
CG8	ED8kU-50DD-RD	51.5
CG9	ED8kU-50DD-RD	53.2
DG1	ED8kU-50DD-RD	72.2
DG2	ED8kU-50DD-RD	68.4
F1	ED8kU-70DD-RD	348
F2	ED8kU-70DD-RD	181.7
FM1	ED8kU-50DD-RD	107.2
FM2	ED8kU-50DD-RD	64.1
FM3	ED8kU-50DD-RD	96.4
FM4	ED8kU-50DD-RD	75.8
FM5	ED8kU-50DD-RD	55.3

FM6	ED8kU-50DD-RD	56.9
FMM1	ED8kU-50DD-RD	139.7
FMM2	ED8kU-50DD-RD	150.7
FG1	DC40	89.6
FG10	DC40	26.6
FG11	DC40	25.1
FG12	DC40	46.1
FG2	DC40	57.2
FG3	DC40	68.9
FG4	DC40	52
FG5	DC40	43.1
FG6	DC40	29.6
FG7	DC40	29.8
FG8	DC40	34.8
FG9	DC40	27.8
FF1	ED7850-2400	120
FF2	ED8kU-130DD-RD	148.7
SM1	DC40	108.9
SM2	DC40	110.9
SG1	DC40	23.5
SG2	DC40	26.2
SG3	DC40	29.2
SG4	DC40	36.2
S	DSL70-GN	484
SAG1	DC40	20.3
SAG2	DC40	18.7
SAM	DC40	120
SBG1	DC40	34.3
SBG2	DC40	31.1
SBM	DC40	106.1
SCG1	DC40	41.2
SCG2	DC40	38.8

# Full Line lengths for MENTOR7 - M

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

<b>Position</b>	<b>Length (mm)</b>
A1`	7508
A2`	7467
A3`	7442
A4`	7468
A5`	7399
A6`	7363
A7`	7320
A8`	7348
A9`	7230
A10`	7163
A11`	7074
A12`	7093
A13`	7024
A14`	7044
A15`	6829
A16`	6813
B1`	7371
B2`	7354
B3`	7324
B4`	7332
B5`	7306
B6`	7267
B7`	7234
B8`	7262
B9`	7142
B10`	7073
B11`	7004
B12`	7019
B13`	6947
B14`	6957
B15`	6829
B16`	6797
C1`	7657
C2`	7543
C3`	7508
C4`	7463
C5`	7466
C6`	7547
C7`	7411



C8`	7353
C9`	7370
C10`	7297
C11`	7309
C12`	7189
C13`	7118
C14`	7052
C15`	7058
C16`	6984
C17`	6986
C18`	6898
C19`	6875
F1`	8130
F2`	7808
F3`	7494
F4`	7326
F5`	7291
F6`	7156
F7`	6952
F8`	7004
F9`	6838
F10`	6827
F11`	6829
F12`	7039
S4`	6900
S3`	6829
S2`	6779
S1`	6751
`	0