




# MENTOR 7 LIGHT

## Table of contents

- Line plan for MENTOR 7 LIGHT
- Line lengths for MENTOR 7 LIGHT- XXS
- Full Line lengths for MENTOR 7 LIGHT- XXS
- Line lengths for MENTOR 7 LIGHT- XS
- Full Line lengths for MENTOR 7 LIGHT- XS
- Line lengths for MENTOR 7 LIGHT- S
- Full Line lengths for MENTOR 7 LIGHT- S
- Line lengths for MENTOR 7 LIGHT- M
- Full Line lengths for MENTOR 7 LIGHT- M
- Line lengths for MENTOR 7 LIGHT- L
- Full Line lengths for MENTOR 7 LIGHT- L

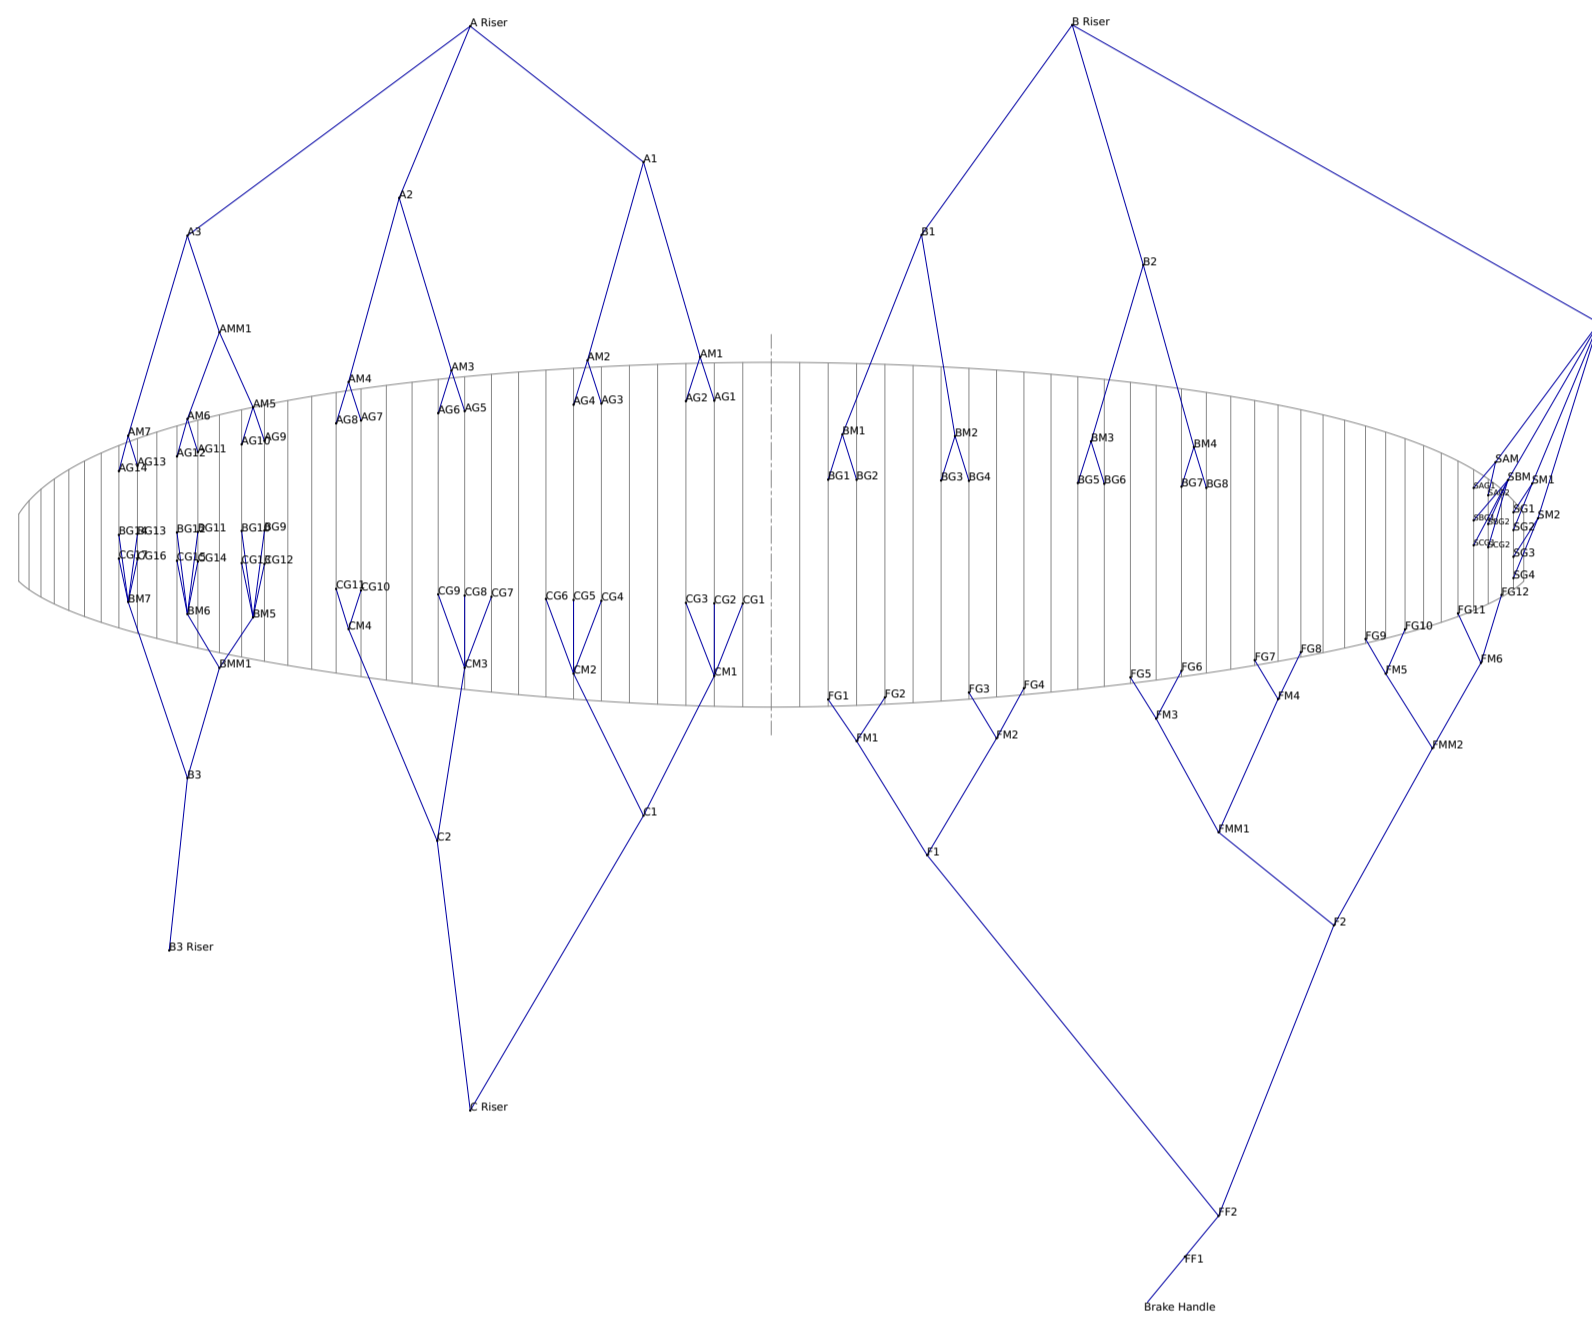

# Line lengths for MENTOR 7 LIGHT - XXS

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-M_RED	441.1
A2	PPSL191-M_RED	449.9
A3	PPSL191-RED	432.6
AM1	ED8kU-90DD-RED	131.2
AM2	ED8kU-90DD-RED	128.1
AM3	ED8kU-90DD-RED	117
AM4	ED8kU-70DD	114
AM5	ED8kU-70DD	55.7
AM6	ED8kU-50DD-RED	46.3
AM7	ED8kU-50DD-RED	111.1
AMM1	ED8kU-130DD-RED	67.2
AG1	ED8kU-70DD	30.5
AG10	ED8kU-50DD-RED	19.1
AG11	DC40-RED	20.8
AG12	DC40-RED	22.5
AG13	DC40-RED	18.8
AG14	DC40-RED	20.6
AG2	ED8kU-50DD-RED	26.9
AG3	ED8kU-50DD-RED	27.3
AG4	ED8kU-50DD-RED	29.4
AG5	ED8kU-70DD	28.3
AG6	ED8kU-50DD-RED	25.1
AG7	ED8kU-50DD-RED	24.1
AG8	ED8kU-50DD-RED	26.5
AG9	ED8kU-50DD-RED	24.9
B1	PPSL191-YW	274.6
B2	PPSL191-YW	434.5
B3	PPSL191-YW	418.8
BM1	ED8kU-90DD-RED	276.8
BM2	ED8kU-90DD-RED	273.8
BM3	ED8kU-90DD-RED	114.5
BM4	ED8kU-90DD-RED	112.3
BM5	ED8kU-70DD	36.4
BM6	ED8kU-50DD-RED	30.3
BM7	ED8kU-50DD-RED	105.2
BMM1	ED8kU-90DD-RED	72.5
BG1	ED8kU-50DD-RED	29.6
BG10	DC40-RED	39
BG11	DC40-RED	39.1

BG12	DC40-RED	40.3
BG13	DC40-RED	31.6
BG14	DC40-RED	32.4
BG2	ED8kU-50DD-RED	28
BG3	ED8kU-50DD-RED	27.9
BG4	ED8kU-50DD-RED	28.4
BG5	ED8kU-50DD-RED	28
BG6	ED8kU-50DD-RED	24.6
BG7	ED8kU-50DD-RED	23.7
BG8	ED8kU-50DD-RED	26.1
BG9	DC40-RED	45.1
C1	ED8001-130D-BE	460.8
C2	ED8001-130D-BE	286.2
CM1	ED8kU-70DD	98.7
CM2	ED8kU-70DD	91
CM3	ED8kU-70DD	259.8
CM4	ED8kU-70DD	274.6
CG1	ED8kU-50DD-RED	55.8
CG10	ED8kU-50DD-RED	24.8
CG11	ED8kU-50DD-RED	25.7
CG12	DC40-RED	49.2
CG13	DC40-RED	43
CG14	DC40-RED	43.3
CG15	DC40-RED	43.7
CG16	DC40-RED	34.8
CG17	DC40-RED	34.9
CG2	ED8kU-50DD-RED	45.8
CG3	ED8kU-50DD-RED	42.7
CG4	ED8kU-50DD-RED	46
CG5	ED8kU-50DD-RED	46.1
CG6	ED8kU-50DD-RED	53.1
CG7	ED8kU-50DD-RED	49.9
CG8	ED8kU-50DD-RED	44.8
CG9	ED8kU-50DD-RED	46.2
F1	ED8kU-70DD	300.9
F2	ED8kU-70DD	157.4
FM1	ED8kU-50DD-RED	93.4
FM2	ED8kU-50DD-RED	55.5
FM3	ED8kU-50DD-RED	85.5
FM4	ED8kU-50DD-RED	65.8
FM5	ED8kU-50DD-RED	48.2
FM6	ED8kU-50DD-RED	48.6
FMM1	ED8kU-50DD-RED	121.8

FMM2	ED8kU-50DD-RED	129.9
FG1	DC40-RED	77.9
FG10	DC40-RED	23.1
FG11	DC40-RED	21.9
FG12	DC40-RED	40.2
FG2	DC40-RED	49.7
FG3	DC40-RED	60
FG4	DC40-RED	45.2
FG5	DC40-RED	36.6
FG6	DC40-RED	25.7
FG7	DC40-RED	25.9
FG8	DC40-RED	31.1
FG9	DC40-RED	24.2
FF1	ED7850-2400	120
FF2	ED8kU-130DD-RED	121.4
SM1	ED8kU-50DD-RED	94.7
SM2	ED8kU-50DD-RED	96.5
SG1	DC40-RED	20.4
SG2	DC40-RED	22.8
SG3	DC40-RED	25.3
SG4	DC40-RED	31.5
S	DSL70GN	410.4
SAG1	DC40-RED	17.6
SAG2	DC40-RED	16.3
SAM	ED8kU-50DD-RED	104.1
SBG1	DC40-RED	29.6
SBG2	DC40-RED	27
SBM	ED8kU-50DD-RED	92.1
SCG1	DC40-RED	35.7
SCG2	DC40-RED	33.7

# Full Line lengths for MENTOR7LIGHT - XXS

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Length (mm)
A1`	6543.657852
A2`	6506.731432
A3`	6480.225716
A4`	6501.392149
A5`	6466.981647
A6`	6434.520723
A7`	6395.118035
A8`	6418.589712
A9`	6319.363208
A10`	6260.636042
A11`	6183.533651
A12`	6199.994487
A13`	6139.292289
A14`	6157.020608
A15`	5935.755855
A16`	5922.621469
B1`	6424.440274
B2`	6408.680674
B3`	6377.660136
B4`	6382.431831
B5`	6385.3031
B6`	6351.207697
B7`	6320.08342
B8`	6344.197062
B9`	6241.963022
B10`	6181.754377
B11`	6121.43421
B12`	6133.703107
B13`	6070.05544
B14`	6078.633645
B15`	5935.599212
B16`	5908.89649
C1`	6668.246453
C2`	6568.160728
C3`	6536.549983
C4`	6492.754998
C5`	6494.207842
C6`	6563.70829
C7`	6473.470025

C8`	6422.092181
C9`	6436.762276
C10`	6370.995075
C11`	6380.632328
C12`	6283.698652
C13`	6221.403505
C14`	6163.251922
C15`	6167.598609
C16`	6102.414125
C17`	6103.772258
C18`	5995.766572
C19`	5976.37258
F1`	7095.56303
F2`	6813.874618
F3`	6537.716885
F4`	6390.105419
F5`	6388.043615
F6`	6278.338057
F7`	6082.911961
F8`	6135.414871
F9`	5970.818497
F10`	5960.101521
F11`	5951.967787
F12`	6134.199058
S4`	5998.833097
S3`	5936.718687
S2`	5893.484067
S1`	5869.195038
`	0

# Line lengths for MENTOR7LIGHT - XS

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-M_RED	458.2
A2	PPSL191-M_RED	460.9
A3	PPSL191-RED	436.6
AM1	ED8kU-90DD-RED	137.7
AM2	ED8kU-90DD-RED	133.7
AM3	ED8kU-90DD-RED	123.4
AM4	ED8kU-90DD-RED	117.9
AM5	ED8kU-50DD-RED	58.8
AM6	ED8kU-50DD-RED	47.4
AM7	ED8kU-50DD-RED	115
AMM1	ED8kU-130DD-RED	72.3
AG1	ED8kU-70DD	32
AG10	DC40-RED	19.6
AG11	DC40-RED	22.1
AG12	DC40-RED	23.5
AG13	DC40-RED	19.9
AG14	DC40-RED	21.5
AG2	ED8kU-50DD-RED	28.1
AG3	ED8kU-50DD-RED	28.7
AG4	ED8kU-50DD-RED	30.7
AG5	ED8kU-70DD	29.8
AG6	ED8kU-50DD-RED	25.9
AG7	ED8kU-50DD-RED	25.6
AG8	ED8kU-50DD-RED	27.6
AG9	DC40-RED	26.2
B1	PPSL191-YW	282.1
B2	PPSL191-YW	445.2
B3	PPSL191-YW	423.4
BM1	ED8kU-90DD-RED	289.8
BM2	ED8kU-90DD-RED	286.8
BM3	ED8kU-90DD-RED	120.5
BM4	ED8kU-90DD-RED	116.7
BM5	ED8kU-50DD-RED	38.4
BM6	ED8kU-50DD-RED	31
BM7	ED8kU-50DD-RED	109.1
BMM1	ED8kU-90DD-RED	77.3
BG1	ED8kU-50DD-RED	31
BG10	DC40-RED	40.7
BG11	DC40-RED	41.1



BG12	DC40-RED	42.2
BG13	DC40-RED	33.2
BG14	DC40-RED	34
BG2	ED8kU-50DD-RED	29.4
BG3	ED8kU-50DD-RED	29.3
BG4	ED8kU-50DD-RED	29.7
BG5	ED8kU-50DD-RED	29.4
BG6	ED8kU-50DD-RED	25.6
BG7	ED8kU-50DD-RED	25.1
BG8	ED8kU-50DD-RED	27.3
BG9	DC40-RED	47.3
C1	ED8001-130D-BE	477.7
C2	ED8001-130D-BE	290
CM1	ED8kU-70DD	103.6
CM2	ED8kU-70DD	95.1
CM3	ED8kU-70DD	272.4
CM4	ED8kU-70DD	286
CG1	ED8kU-50DD-RED	58.5
CG10	ED8kU-50DD-RED	26.2
CG11	ED8kU-50DD-RED	26.8
CG12	ED8kU-50DD-RED	51.6
CG13	ED8kU-50DD-RED	44.8
CG14	ED8kU-50DD-RED	45.5
CG15	ED8kU-50DD-RED	45.7
CG16	DC40-RED	36.5
CG17	DC40-RED	36.6
CG2	ED8kU-50DD-RED	48.1
CG3	ED8kU-50DD-RED	44.8
CG4	ED8kU-50DD-RED	48.5
CG5	ED8kU-50DD-RED	48.5
CG6	ED8kU-50DD-RED	55.5
CG7	ED8kU-50DD-RED	52.6
CG8	ED8kU-50DD-RED	46.9
CG9	ED8kU-50DD-RED	48
F1	ED8kU-70DD	319.7
F2	ED8kU-70DD	162.7
FM1	ED8kU-50DD-RED	98.2
FM2	ED8kU-50DD-RED	58.1
FM3	ED8kU-50DD-RED	88.7
FM4	ED8kU-50DD-RED	67.4
FM5	ED8kU-50DD-RED	51.1
FM6	ED8kU-50DD-RED	52.1
FMM1	ED8kU-50DD-RED	129

FMM2	ED8kU-50DD-RED	133.4
FG1	DC40-RED	81.3
FG10	DC40-RED	24.1
FG11	DC40-RED	22.9
FG12	DC40-RED	42.3
FG2	DC40-RED	51.7
FG3	DC40-RED	62.7
FG4	DC40-RED	47.1
FG5	DC40-RED	38.6
FG6	DC40-RED	26.4
FG7	DC40-RED	27.5
FG8	DC40-RED	32.3
FG9	DC40-RED	25.6
FF1	ED7850-2400	120
FF2	ED8kU-130DD-RED	112
SM1	DC40-RED	99.3
SM2	DC40-RED	101.6
SG1	DC40-RED	21.3
SG2	DC40-RED	23.9
SG3	DC40-RED	26.4
SG4	DC40-RED	33
S	DSL70GN	415.5
SAG1	DC40-RED	18.5
SAG2	DC40-RED	17.1
SAM	DC40-RED	109
SBG1	DC40-RED	31.1
SBG2	DC40-RED	28.2
SBM	DC40-RED	96.6
SCG1	DC40-RED	37.5
SCG2	DC40-RED	35.4

# Full Line lengths for MENTOR7LIGHT - XS

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Length (mm)
A1`	6785
A2`	6745
A3`	6711
A4`	6731
A5`	6646
A6`	6608
A7`	6550
A8`	6569
A9`	6442
A10`	6376
A11`	6287
A12`	6301
A13`	6230
A14`	6247
A15`	6046
A16`	6032
B1`	6639
B2`	6624
B3`	6593
B4`	6597
B5`	6561
B6`	6523
B7`	6481
B8`	6502
B9`	6369
B10`	6303
B11`	6233
B12`	6243
B13`	6172
B14`	6180
B15`	6047
B16`	6019
C1`	6909
C2`	6805
C3`	6772
C4`	6723
C5`	6723
C6`	6794
C7`	6661

C8`	6604
C9`	6616
C10`	6533
C11`	6538
C12`	6412
C13`	6344
C14`	6276
C15`	6279
C16`	6206
C17`	6206
C18`	6111
C19`	6090
F1`	7312
F2`	7016
F3`	6725
F4`	6568
F5`	6505
F6`	6383
F7`	6180
F8`	6228
F9`	6041
F10`	6027
F11`	6025
F12`	6218
S4`	6116
S3`	6050
S2`	6003
S1`	5977
`	0

# Line lengths for MENTOR7LIGHT - S

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-M_RED	483.1
A2	PPSL191-M_RED	486.4
A3	PPSL191-RED	461.1
AM1	ED8kU-90DD-RED	144.3
AM2	ED8kU-90DD-RED	140.3
AM3	ED8kU-90DD-RED	129.4
AM4	ED8kU-90DD-RED	123.7
AM5	ED8kU-50DD-RED	61.7
AM6	ED8kU-50DD-RED	49.8
AM7	ED8kU-50DD-RED	120.7
AMM1	ED8kU-130DD-RED	75.8
AG1	ED8kU-70DD	33.6
AG10	DC40-RED	20.6
AG11	DC40-RED	23.1
AG12	DC40-RED	24.6
AG13	DC40-RED	20.9
AG14	DC40-RED	22.6
AG2	ED8kU-50DD-RED	29.5
AG3	ED8kU-50DD-RED	30.1
AG4	ED8kU-50DD-RED	32.2
AG5	ED8kU-70DD	31.2
AG6	ED8kU-50DD-RED	27.2
AG7	ED8kU-50DD-RED	26.9
AG8	ED8kU-50DD-RED	28.9
AG9	DC40-RED	27.4
B1	PPSL191-YW	299.1
B2	PPSL191-YW	470.4
B3	PPSL191-YW	447.3
BM1	ED8kU-90DD-RED	303.8
BM2	ED8kU-90DD-RED	300.9
BM3	ED8kU-90DD-RED	126.3
BM4	ED8kU-90DD-RED	122.4
BM5	ED8kU-50DD-RED	40.3
BM6	ED8kU-50DD-RED	32.6
BM7	ED8kU-50DD-RED	114.5
BMM1	ED8kU-90DD-RED	81
BG1	ED8kU-50DD-RED	32.4
BG10	DC40-RED	42.7
BG11	DC40-RED	43.1

BG12	DC40-RED	44.2
BG13	DC40-RED	34.8
BG14	DC40-RED	35.6
BG2	ED8kU-50DD-RED	30.9
BG3	ED8kU-50DD-RED	30.7
BG4	ED8kU-50DD-RED	31.2
BG5	ED8kU-50DD-RED	30.8
BG6	ED8kU-50DD-RED	26.8
BG7	ED8kU-50DD-RED	26.3
BG8	ED8kU-50DD-RED	28.6
BG9	DC40-RED	49.6
C1	ED8001-130D-BE	503.7
C2	ED8001-130D-BE	307.2
CM1	ED8kU-70DD	108.5
CM2	ED8kU-70DD	99.8
CM3	ED8kU-70DD	285.7
CM4	ED8kU-70DD	300
CG1	ED8kU-50DD-RED	61.4
CG10	ED8kU-50DD-RED	27.5
CG11	ED8kU-50DD-RED	28.1
CG12	ED8kU-50DD-RED	54.1
CG13	ED8kU-50DD-RED	47
CG14	ED8kU-50DD-RED	47.7
CG15	ED8kU-50DD-RED	47.9
CG16	DC40-RED	38.3
CG17	DC40-RED	38.4
CG2	ED8kU-50DD-RED	50.5
CG3	ED8kU-50DD-RED	47.1
CG4	ED8kU-50DD-RED	50.8
CG5	ED8kU-50DD-RED	50.8
CG6	ED8kU-50DD-RED	58.2
CG7	ED8kU-50DD-RED	55.1
CG8	ED8kU-50DD-RED	49.1
CG9	ED8kU-50DD-RED	50.4
F1	ED8kU-70DD	335.1
F2	ED8kU-70DD	170.8
FM1	ED8kU-50DD-RED	103
FM2	ED8kU-50DD-RED	61
FM3	ED8kU-50DD-RED	93
FM4	ED8kU-50DD-RED	70.7
FM5	ED8kU-50DD-RED	53.5
FM6	ED8kU-50DD-RED	54.7
FMM1	ED8kU-50DD-RED	135.2

FMM2	ED8kU-50DD-RED	140
FG1	DC40-RED	85.2
FG10	DC40-RED	25.3
FG11	DC40-RED	24
FG12	DC40-RED	44.3
FG2	DC40-RED	54.3
FG3	DC40-RED	65.8
FG4	DC40-RED	49.4
FG5	DC40-RED	40.5
FG6	DC40-RED	27.7
FG7	DC40-RED	28.8
FG8	DC40-RED	33.9
FG9	DC40-RED	26.8
FF1	ED7850-2400	120
FF2	ED8kU-130DD-RED	125.2
SM1	DC40-RED	104.2
SM2	DC40-RED	106.5
SG1	DC40-RED	22.3
SG2	DC40-RED	25.1
SG3	DC40-RED	27.7
SG4	DC40-RED	34.6
S	DSL70GN	439.5
SAG1	DC40-RED	19.4
SAG2	DC40-RED	17.9
SAM	DC40-RED	114.3
SBG1	DC40-RED	32.6
SBG2	DC40-RED	29.6
SBM	DC40-RED	101.3
SCG1	DC40-RED	39.3
SCG2	DC40-RED	37.1

# Full Line lengths for MENTOR7LIGHT - S

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

<b>Position</b>	<b>Length (mm)</b>
A1`	7117
A2`	7076
A3`	7042
A4`	7063
A5`	6976
A6`	6936
A7`	6877
A8`	6897
A9`	6764
A10`	6695
A11`	6602
A12`	6617
A13`	6543
A14`	6560
A15`	6349
A16`	6334
B1`	6965
B2`	6950
B3`	6918
B4`	6923
B5`	6887
B6`	6848
B7`	6803
B8`	6826
B9`	6688
B10`	6618
B11`	6545
B12`	6556
B13`	6482
B14`	6490
B15`	6350
B16`	6320
C1`	7248
C2`	7139
C3`	7105
C4`	7055
C5`	7055
C6`	7130
C7`	6991



C8`	6932
C9`	6944
C10`	6858
C11`	6864
C12`	6733
C13`	6661
C14`	6591
C15`	6593
C16`	6517
C17`	6518
C18`	6417
C19`	6396
F1`	7683
F2`	7373
F3`	7069
F4`	6905
F5`	6840
F6`	6712
F7`	6501
F8`	6551
F9`	6356
F10`	6341
F11`	6340
F12`	6543
S4`	6423
S3`	6353
S2`	6304
S1`	6276
`	0

# Line lengths for MENTOR7LIGHT - M

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Material	Length (cm)
A1	PPSL191-M_RED	506.7
A2	PPSL191-M_RED	510.5
A3	PPSL191-RED	484.3
AM1	ED8kU-90DD-RED	150.5
AM2	ED8kU-90DD-RED	146.6
AM3	ED8kU-90DD-RED	135
AM4	ED8kU-70DD	129.2
AM5	ED8kU-70DD	64.4
AM6	ED8kU-50DD-RED	52
AM7	ED8kU-50DD-RED	126
AMM1	ED8kU-130DD-RED	79
AG1	ED8kU-70DD	35
AG10	ED8kU-50DD-RED	21.5
AG11	DC40-RED	24.1
AG12	DC40-RED	25.7
AG13	DC40-RED	21.8
AG14	DC40-RED	23.6
AG2	ED8kU-50DD-RED	30.8
AG3	ED8kU-50DD-RED	31.4
AG4	ED8kU-50DD-RED	33.6
AG5	ED8kU-70DD	32.6
AG6	ED8kU-50DD-RED	28.4
AG7	ED8kU-50DD-RED	28
AG8	ED8kU-50DD-RED	30.2
AG9	ED8kU-50DD-RED	28.6
B1	PPSL191-YW	315.1
B2	PPSL191-YW	494.2
B3	PPSL191-YW	469.8
BM1	ED8kU-90DD-RED	317
BM2	ED8kU-90DD-RED	314.2
BM3	ED8kU-90DD-RED	131.8
BM4	ED8kU-90DD-RED	127.8
BM5	ED8kU-70DD	42.1
BM6	ED8kU-70DD	34
BM7	ED8kU-50DD-RED	119.6
BMM1	ED8kU-90DD-RED	84.5
BG1	ED8kU-50DD-RED	33.8
BG10	DC40-RED	44.6
BG11	DC40-RED	45

BG12	DC40-RED	46.2
BG13	DC40-RED	36.3
BG14	DC40-RED	37.2
BG2	ED8kU-50DD-RED	32.3
BG3	ED8kU-50DD-RED	32
BG4	ED8kU-50DD-RED	32.6
BG5	ED8kU-50DD-RED	32.2
BG6	ED8kU-50DD-RED	28
BG7	ED8kU-50DD-RED	27.4
BG8	ED8kU-50DD-RED	29.9
BG9	DC40-RED	51.8
C1	ED8001-130DD-BE	528.2
C2	ED8001-130DD-BE	323.3
CM1	ED8kU-70DD	113.2
CM2	ED8kU-70DD	104.3
CM3	ED8kU-70DD	298.2
CM4	ED8kU-70DD	313.2
CG1	ED8kU-50DD-RED	64.1
CG10	ED8kU-50DD-RED	28.7
CG11	ED8kU-50DD-RED	29.3
CG12	DC40-RED	56.5
CG13	DC40-RED	49.1
CG14	DC40-RED	49.8
CG15	DC40-RED	50
CG16	DC40-RED	40
CG17	DC40-RED	40.1
CG2	ED8kU-50DD-RED	52.7
CG3	ED8kU-50DD-RED	49.2
CG4	ED8kU-50DD-RED	53
CG5	ED8kU-50DD-RED	53
CG6	ED8kU-50DD-RED	60.8
CG7	ED8kU-50DD-RED	57.5
CG8	ED8kU-50DD-RED	51.3
CG9	ED8kU-50DD-RED	52.6
F1	ED8kU-70DD	349.6
F2	ED8kU-70DD	178.5
FM1	ED8kU-50DD-RED	107.5
FM2	ED8kU-50DD-RED	63.8
FM3	ED8kU-50DD-RED	97.1
FM4	ED8kU-50DD-RED	73.9
FM5	ED8kU-50DD-RED	55.8
FM6	ED8kU-50DD-RED	57.1
FMM1	ED8kU-50DD-RED	141

FMM2	ED8kU-50DD-RED	146.3
FG1	DC40-RED	89
FG10	DC40-RED	26.4
FG11	DC40-RED	25
FG12	DC40-RED	46.2
FG2	DC40-RED	56.7
FG3	DC40-RED	68.6
FG4	DC40-RED	51.5
FG5	DC40-RED	42.3
FG6	DC40-RED	28.9
FG7	DC40-RED	30.1
FG8	DC40-RED	35.4
FG9	DC40-RED	28
FF1	ED7850-2400	120
FF2	ED8001-130DD-BE	137.8
SM1	ED8kU-50DD-RED	108.7
SM2	ED8kU-50DD-RED	111.1
SG1	DC40-RED	23.3
SG2	DC40-RED	26.2
SG3	DC40-RED	28.9
SG4	DC40-RED	36.2
S	DSL70GN	472.1
SAG1	DC40-RED	20.3
SAG2	DC40-RED	18.7
SAM	ED8kU-50DD-RED	119.3
SBG1	DC40-RED	34
SBG2	DC40-RED	30.9
SBM	ED8kU-50DD-RED	105.7
SCG1	DC40-RED	41
SCG2	DC40-RED	38.8

# Full Line lengths for MENTOR7LIGHT - M

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

<b>Position</b>	<b>Length (mm)</b>
A1`	7422
A2`	7380
A3`	7346
A4`	7369
A5`	7280
A6`	7238
A7`	7177
A8`	7199
A9`	7060
A10`	6989
A11`	6891
A12`	6907
A13`	6829
A14`	6848
A15`	6627
A16`	6611
B1`	7265
B2`	7249
B3`	7218
B4`	7223
B5`	7187
B6`	7145
B7`	7100
B8`	7124
B9`	6980
B10`	6908
B11`	6832
B12`	6843
B13`	6766
B14`	6775
B15`	6628
B16`	6597
C1`	7560
C2`	7446
C3`	7411
C4`	7360
C5`	7361
C6`	7439
C7`	7295

C8`	7233
C9`	7246
C10`	7157
C11`	7163
C12`	7027
C13`	6953
C14`	6879
C15`	6882
C16`	6803
C17`	6803
C18`	6698
C19`	6676
F1`	8026
F2`	7703
F3`	7386
F4`	7215
F5`	7149
F6`	7016
F7`	6796
F8`	6849
F9`	6646
F10`	6631
F11`	6630
F12`	6842
S4`	6703
S3`	6631
S2`	6580
S1`	6551
`	0

# Line lengths for MENTOR7LIGHT - L

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Material	Length (cm)
A1	PPSL160-M-RED	529.1
A2	PPSL160-M-RED	533.9
A3	PPSL160-RED	507.2
AM1	ED8kU-130DD-RED	156.5
AM2	ED8kU-130DD-RED	152.8
AM3	ED8kU-130DD-RED	140.4
AM4	ED8kU-90DD-RED	134.7
AM5	ED8kU-70DD	66.9
AM6	ED8kU-50DD-RED	54.2
AM7	ED8kU-50DD-RED	131.4
AMM1	ED8kU-130DD-RED	82.1
AG1	ED8kU-70DD	36.4
AG10	ED8kU-50DD-RED	22.4
AG11	DC40-RED	25.1
AG12	DC40-RED	26.8
AG13	DC40-RED	22.6
AG14	DC40-RED	24.6
AG2	ED8kU-50DD-RED	32.1
AG3	ED8kU-50DD-RED	32.6
AG4	ED8kU-50DD-RED	35
AG5	ED8kU-70DD	33.9
AG6	ED8kU-50DD-RED	29.6
AG7	ED8kU-50DD-RED	29.1
AG8	ED8kU-50DD-RED	31.4
AG9	ED8kU-50DD-RED	29.8
B1	PPSL160-YEL	331.7
B2	PPSL160-YEL	516.8
B3	PPSL160-YEL	491
BM1	ED8kU-90DD-RED	330.2
BM2	ED8kU-90DD-RED	326.6
BM3	ED8kU-90DD-RED	137.4
BM4	ED8kU-90DD-RED	132.6
BM5	ED8kU-70DD	43.8
BM6	ED8kU-50DD-RED	35.3
BM7	ED8kU-50DD-RED	124.3
BMM1	ED8kU-90DD-RED	88
BG1	ED8kU-50DD-RED	35.3
BG10	DC40-RED	46.3
BG11	DC40-RED	46.8

BG12	DC40-RED	48
BG13	DC40-RED	37.8
BG14	DC40-RED	38.7
BG2	ED8kU-50DD-RED	33.5
BG3	ED8kU-50DD-RED	33.4
BG4	ED8kU-50DD-RED	33.8
BG5	ED8kU-50DD-RED	33.5
BG6	ED8kU-50DD-RED	29.1
BG7	ED8kU-50DD-RED	28.7
BG8	ED8kU-50DD-RED	31
BG9	DC40-RED	53.9
C1	ED8001-130D-BE	552.5
C2	ED8001-130D-BE	339
CM1	ED8kU-70DD	117.8
CM2	ED8kU-70DD	108.5
CM3	ED8kU-70DD	310.4
CM4	ED8kU-70DD	325.8
CG1	ED8kU-50DD-RED	66.7
CG10	ED8kU-50DD-RED	29.9
CG11	ED8kU-50DD-RED	30.5
CG12	DC40-RED	58.8
CG13	DC40-RED	51
CG14	DC40-RED	51.8
CG15	DC40-RED	52.1
CG16	DC40-RED	41.6
CG17	DC40-RED	41.7
CG2	ED8kU-50DD-RED	54.8
CG3	ED8kU-50DD-RED	51.1
CG4	ED8kU-50DD-RED	55.2
CG5	ED8kU-50DD-RED	55.2
CG6	ED8kU-50DD-RED	63.3
CG7	ED8kU-50DD-RED	59.9
CG8	ED8kU-50DD-RED	53.4
CG9	ED8kU-50DD-RED	54.7
F1	ED8kU-70DD	364.1
F2	ED8kU-70DD	185.4
FM1	ED8kU-50DD-RED	111.9
FM2	ED8kU-50DD-RED	66.2
FM3	ED8kU-50DD-RED	101.1
FM4	ED8kU-50DD-RED	76.8
FM5	ED8kU-50DD-RED	58.1
FM6	ED8kU-50DD-RED	59.4
FMM1	ED8kU-50DD-RED	146.9



FMM2	ED8kU-50DD-RED	152
FG1	DC40-RED	92.6
FG10	DC40-RED	27.5
FG11	DC40-RED	26.1
FG12	DC40-RED	48.1
FG2	DC40-RED	58.9
FG3	DC40-RED	71.5
FG4	DC40-RED	53.6
FG5	DC40-RED	44
FG6	DC40-RED	30.1
FG7	DC40-RED	31.3
FG8	DC40-RED	36.8
FG9	DC40-RED	29.1
FF1	ED7850-2400	120
FF2	ED8kU-130DD-RED	150
SM1	ED8kU-50DD-RED	113.4
SM2	ED8kU-50DD-RED	115.5
SG1	DC40-RED	24.3
SG2	DC40-RED	27.2
SG3	DC40-RED	30.3
SG4	DC40-RED	37.7
S	DSL70-GRN	484.2
SAG1	DC40-RED	21.1
SAG2	DC40-RED	19.6
SAM	ED8kU-50DD-RED	124.3
SBG1	DC40-RED	35.4
SBG2	DC40-RED	32.3
SBM	ED8kU-50DD-RED	109.9
SCG1	DC40-RED	42.6
SCG2	DC40-RED	40.3

# Full Line lengths for MENTOR7LIGHT - L

See also: [docs.nova.eu](https://docs.nova.eu) for a searchable online database

Position	Length (mm)
A1`	7723
A2`	7680
A3`	7648
A4`	7672
A5`	7584
A6`	7542
A7`	7480
A8`	7503
A9`	7361
A10`	7287
A11`	7187
A12`	7204
A13`	7124
A14`	7144
A15`	6909
A16`	6894
B1`	7580
B2`	7562
B3`	7525
B4`	7530
B5`	7486
B6`	7442
B7`	7389
B8`	7413
B9`	7269
B10`	7194
B11`	7114
B12`	7125
B13`	7044
B14`	7053
B15`	6908
B16`	6877
C1`	7879
C2`	7760
C3`	7723
C4`	7670
C5`	7670
C6`	7751
C7`	7601

C8`	7536
C9`	7549
C10`	7455
C11`	7461
C12`	7318
C13`	7240
C14`	7163
C15`	7166
C16`	7082
C17`	7083
C18`	6980
C19`	6957
F1`	8375
F2`	8038
F3`	7707
F4`	7528
F5`	7457
F6`	7318
F7`	7088
F8`	7143
F9`	6931
F10`	6914
F11`	6912
F12`	7133
S4`	6987
S3`	6913
S2`	6861
S1`	6833
`	0